SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyright, 1895, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXXIII.—No. 26. ESTABLISHED 1845. NEW YORK, DECEMBER 28, 1895 $3.00 A YEAR. WEEKLY.

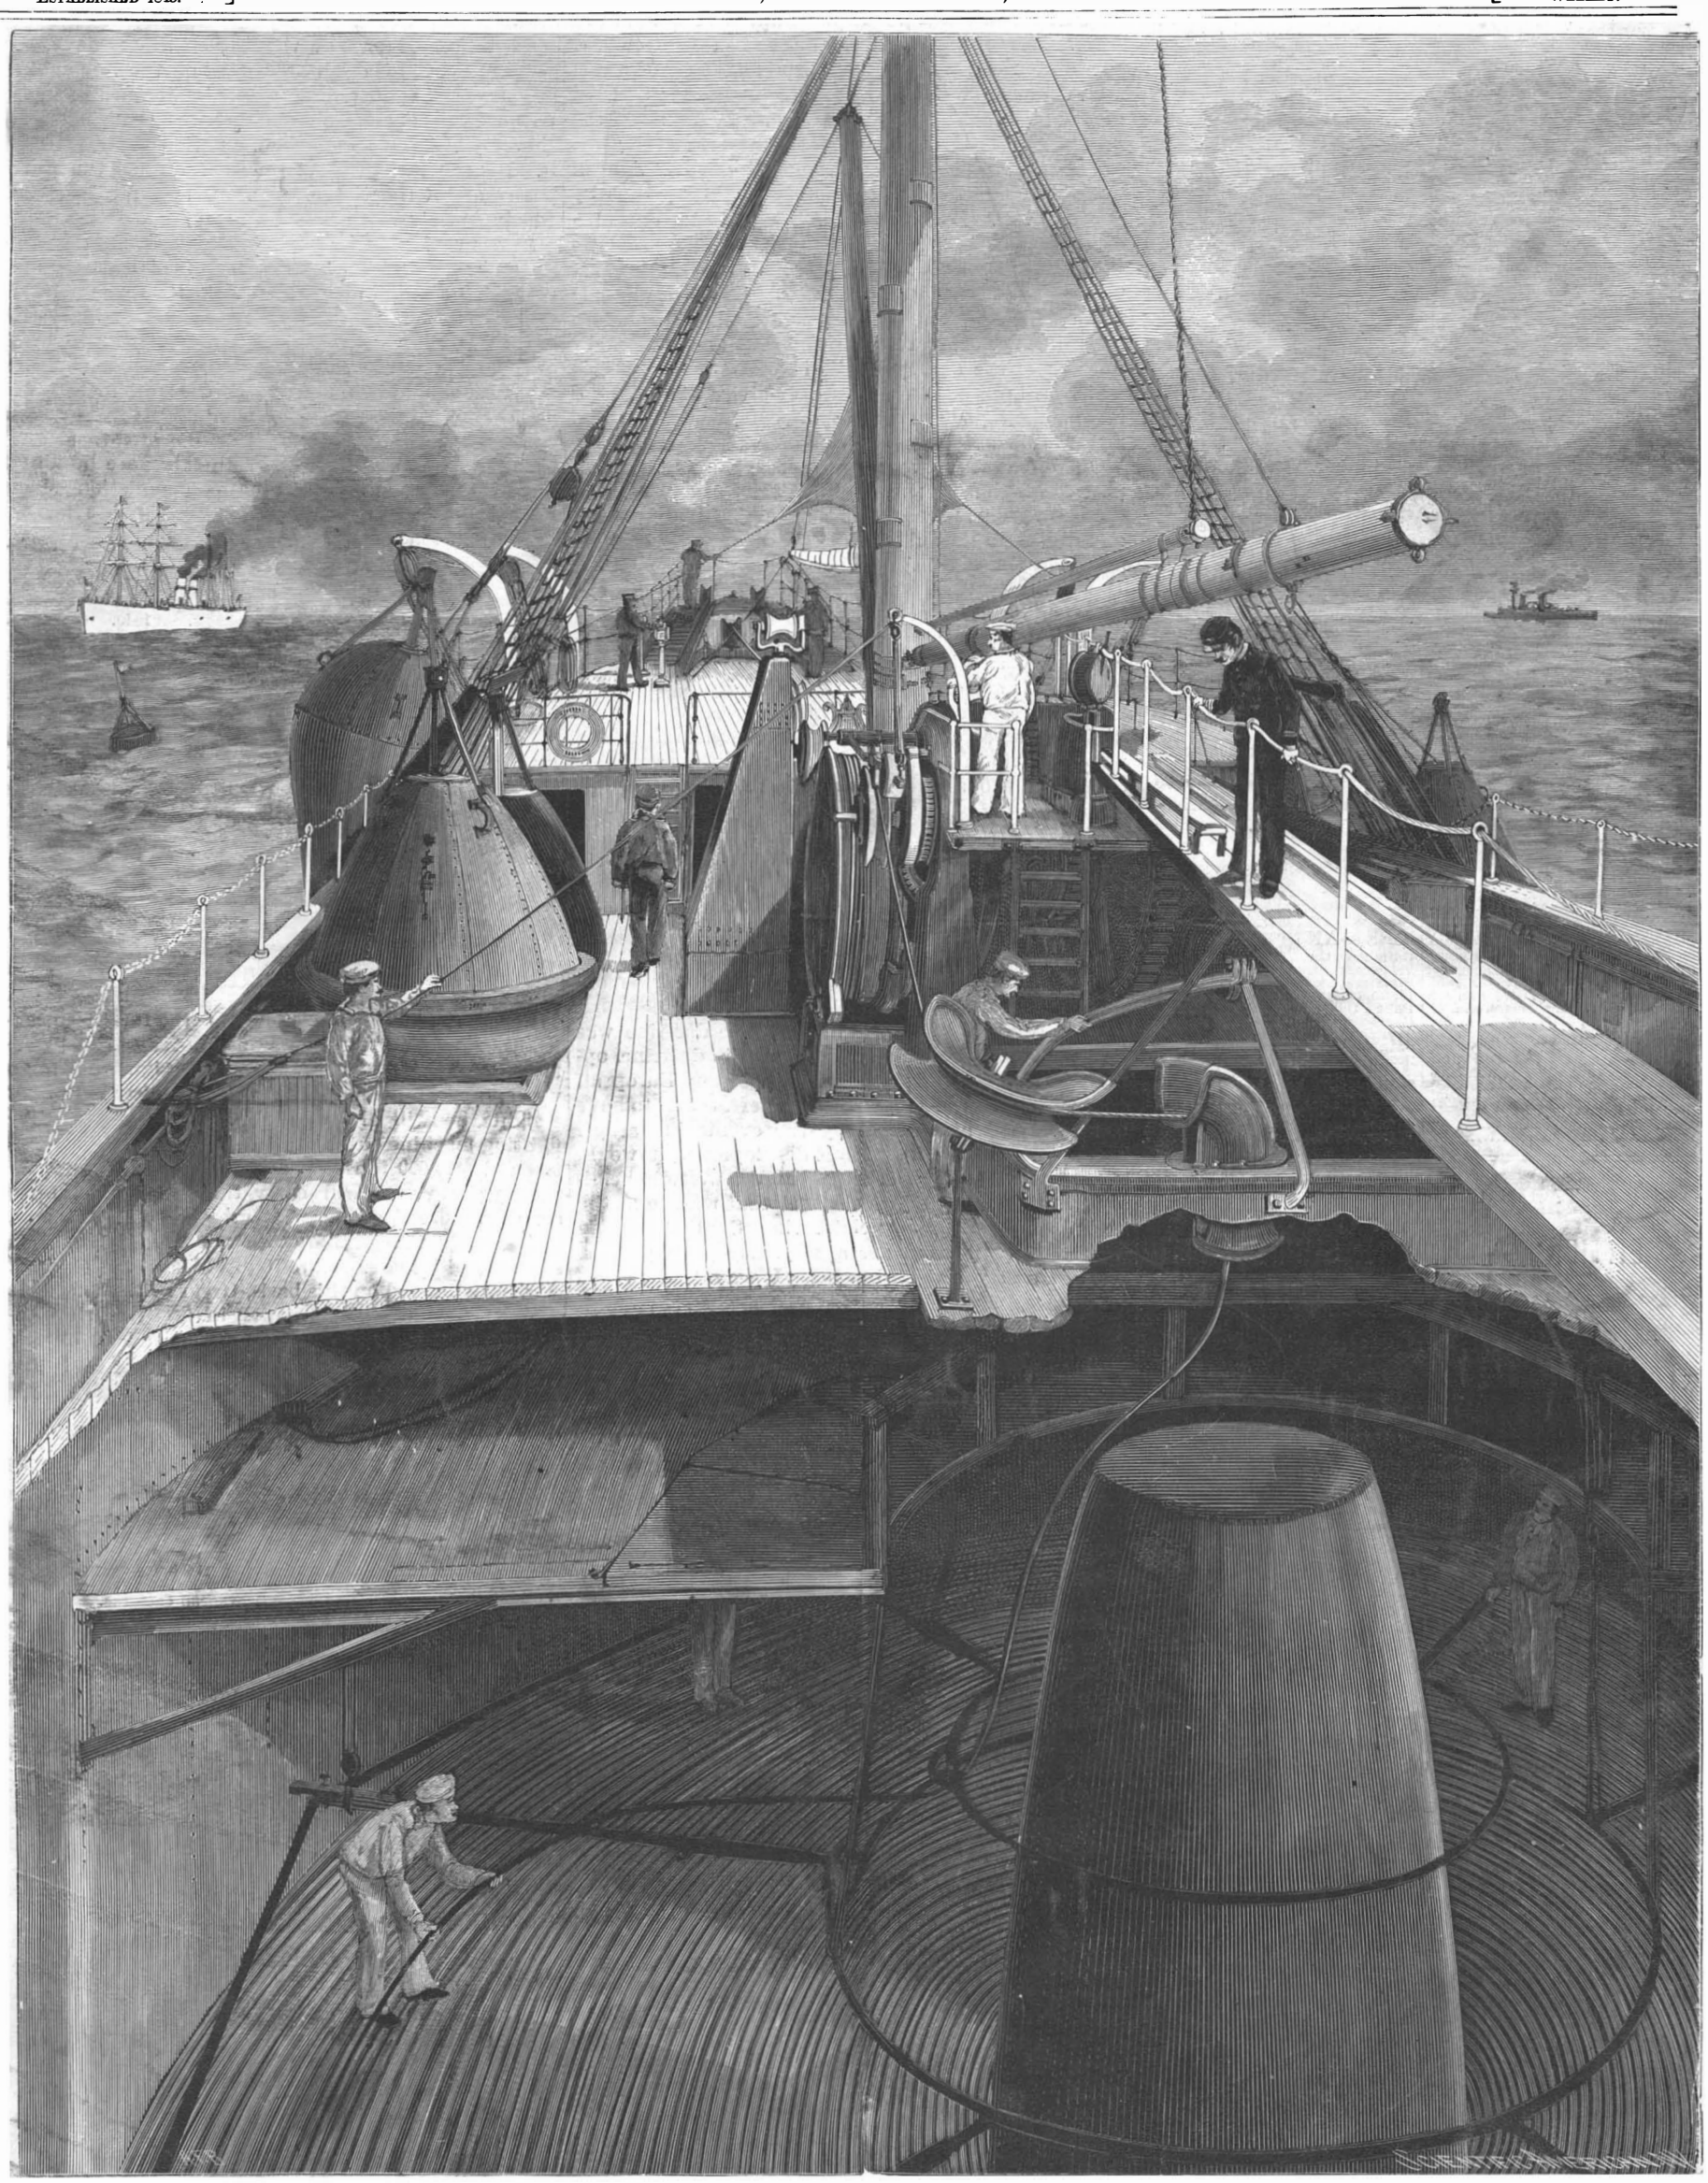

THE COMMERCIAL CABLE CO.S REPAIRING STEAMER MACKAY-BENNETT—DECK, SHOWING ONE OF THE CABLE TANKS.—[See p. 409.]

© 1895 SCIENTIFIC AMERICAN, INC.

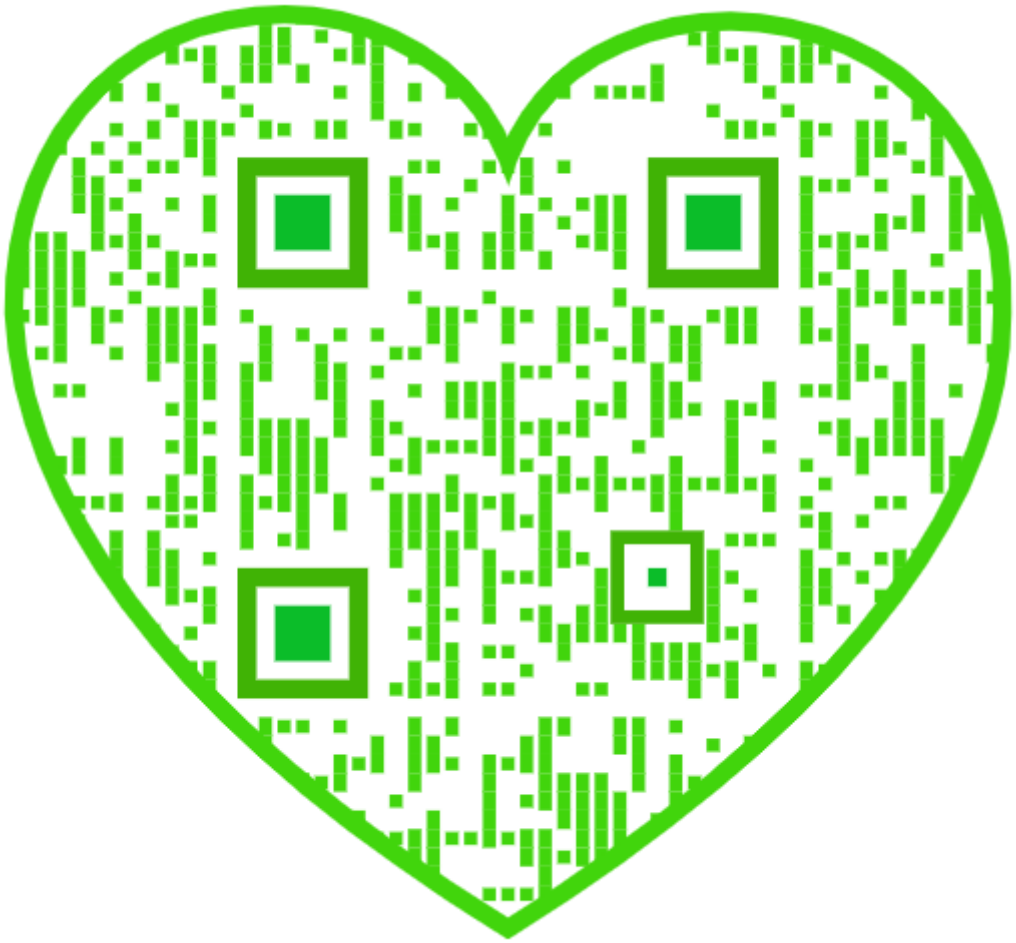

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy, one year, to any foreign country belonging to Postal Union 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union *eight dollars and fifty cents a year.*

Building Edition of Scientific American.

THE BUILDING EDITION OF THE SCIENTIFIC AMERICAN is a large and splendidly illustrated periodical, issued monthly, containing floor plans and perspective views pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, $5.00 a year. To foreign Postal Union countries, $6.50 a year. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign Postal Union countries, $11.00 a year.

Export Edition of the Scientific American,

with which is incorporated "LA AMERICA CIENTIFICA E INDUSTRIAL," or Spanish edition of the SCIENTIFIC AMERICAN, published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number contains about 50 pages, profusely illustrated. It is the finest scientific, industrial export paper published. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. THE SCIENTIFIC AMERICAN EXPORT EDITION has a large guaranteed circulation in all commercial places throughout the world. $3.00 a year, post paid to any part of the world. Single copies, 25 cents.

☞ Manufacturers and others who desire to secure foreign trade, may have large and handsomely displayed announcements published in this edition at a very moderate cost. MUNN & CO., Publishers, 361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, DECEMBER 28, 1895.

Contents.

(Illustrated articles are marked with an asterisk.)

Air pump, bicycle, the Stevens.. 406
Atlanta Exposition, the*..... 408
Atlantic cable repairing steamer*401
Belt shifter, Smith's*..... 404
Bicycle handle bar, the Lovell*.. 410
Bicycle notes..... 403
Bicycle to carry two persons, Getman's*..... 405
Boiler explosion, the Detroit.... 407
Brooklyn Institute Museum, the 404
Colorado River, exploring the.. 410
Crisis, the..... 402
Economy, gas engine..... 407
Electric self-playing piano, an*.. 404
Engineering in the lake region.. 406
Fire balls at sea..... 405
Fishing reel, Halleck's*..... 404
Inventions, recently patented... 411
Jaws, human, force of the..... 405
Lye making (6682)..... 411
Mackay-Bennett repair steamer*401
Naval engineering efficiency.... 406
Naval resources of the United States and British Empire... 402
Notes and queries..... 411
Omnibus, steam, London, 1833*.. 404
Patents granted, weekly record. 411
Photography, dies made by..... 403
Piano, electric self-playing*..... 404
Police, the London*..... 404
Rag pickers of Paris, the..... 406
Sky, January, the..... 403
Star, variable, a new..... 407
Steam engineering, U. S. Bureau of..... 403
St. Paul, accident on..... 407
To readers and subscribers..... 403
Trolley patents, a decision on... 410
Vinegar making (6684)..... 411
Waterproofing cloth..... 407

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 1043.

For the Week Ending December 28, 1895.

Price 10 cents. For sale by all newsdealers.

PAGE

I. BIOGRAPHY.—Calvert Vaux.—Life of the great landscape architect and his professional work and achievements..... 16671

II. BIOLOGY.—Galvanotropism of Tadpoles.—A very curious investigation upon the effect of the electric current upon living animals.—4 illustrations..... 16669

III. ELECTRICAL ENGINEERING.—An Electric Express Line.—An excellent example of a cheap and effective method of electric transportation.—3 illustrations..... 16669

IV. FINE ARTS.—Meissonier and his Methods.—A graphic account of the methods of the great French painter, elucidating the secret of his perfection of work..... 16671

V. HORTICULTURE.—New York Cut Flower Company.—Curious and interesting details of a great industry.—How flowers are gathered, transported and preserved..... 16674

VI. METALLURGY.—Notes on Gold Milling in California.—By ED. B. PRESTON. Continuation of this valuable contribution, with description of the most modern practice.—6 illustrations..... 16670

VII. NAVAL ENGINEERING—Small Spanish Gunboats.—Gunboats dispatched to the Cuban coast.—2 illustrations..... 16664
The Fleets in the Levant.—Notes upon the war ships now gathered in the East on account of the possible disturbances.—2 illustrations..... 16663

VIII. PHOTOGRAPHY.—Developing Tables.—A contribution from Belgium.—Elaborate photographic conveniences.—2 illustrations. 16668

IX. POLITICAL ECONOMY.—The War in Cuba.—The estimated financial position of the island of Cuba for June, 1896.—An interesting resume of the financial condition of Cuba and the probable expenses of the war now in progress..... 16664

X. PHYSICS.—A New Spectral Photometer.—By A. KOENIG.—A new apparatus for determing the intensity of light, utilizing refraction and polarization..... 16669

XI. RAILROAD ENGINEERING.—The Queen Anne's Railroad.—An air line across the Maryland-De'aware Peninsula connecting the upper part of Chesapeake Bay with the mouth of the Delaware.—1 illustration..... 16665
Railway Signaling.—By W. MCC. GRAFTON.—Continuation of this interesting article on the most advanced systems of railroad operations.—5 illustrations..... 16665

XII. TECHNOLOGY.—Bronze Printing Colors.—By A. M. GARANCE. Manufacture of bronze powder as applied to calico printing, with notes on the materials used for the different shades..... 16668
Commercial Fibers.—By D. MORRIS.—Lecture II.—Continuation of this detailed and elaborately illustrated treatise on fiber, with numerous statistics of the different ones produced.—Endogenous fibers. 5 illustrations..... 16672
Novelties in the Gas Lighting Field.—Various notes on argon, rare earths used for Welsbach mantles, acetylene, and benzole enrichment..... 16668
The Silver and Brass Sign Industry.—A curious industry, but little understood, described and illustrated in detail.—8 illustrations..... 16667

THE CRISIS.

The SCIENTIFIC AMERICAN occupies a unique position in the press of the United States. It is devoted to what may in the best sense be termed the arts of peace. It presents a view of the world of science and of practical achievement to its readers, the creative side of mankind having it as an exponent. In political economy sound doctrine regards destruction of life and of property as a world's loss, not as the loss only of the person or persons directly affected. The war between the States, now that thirty years have elapsed since its conclusion, still plays its baleful part in impoverishing the nation. During a part of its continuance its expense was put at one million of dollars per diem. Now it costs nearly one half of that in one single item of revenue expenditure.

The blue and the gray are again united; the evil passions awakened by war have sunk to rest; but the financial effects are still felt and will be felt for years to come unless they are overwhelmed by the weight of new misfortunes which may be brought upon us by another war. For, like a lightning stroke out of a clear sky, an issue is suddenly created between the United States and England, which, incredible as it would have seemed a week ago, may lead to war. If it does, the conflicts of past generations will sink into insignificance compared with the new one, and every quarter of the globe will be involved in a struggle which will put back the cause of civilization and of independent government to an extent which can be measurable only by centuries.

Out of the overgoverned nations have emerged two powers which represent the greatest freedom of government. These two nations are objects of jealousy and dislike to the rulers of almost despotic type which are over the older countries. In England, as in the United States, there is true representative government. The maintenance of the royal family is merely the figurehead of a monarchy and need rank as little more than as a harmless extravagance. The real government is as free and as representative as ours. If the two great powers which are representative of the highest degree of freedom in governmental affairs undertake an internecine war, it means the relegation of mankind to a still firmer grasp of despotic or imperial rule.

England in the past has been very aggressive. She has acquired great colonies by methods which her own historians and moralists condemn. Recently she seems to feel that she has enough, and her methods have changed, for the England of to-day is far different from the England of fifty years ago. Any accessions of territory she may contend for are sought by far more moderate methods than of old.

Some seventy years ago the Monroe doctrine was enunciated by the United States. This doctrine, opposing the increase of the territory of any European government on the western hemisphere, seems to have been justified at the time by the events in Europe. To-day, pushed to its utmost development, it would make us the guardian of almost all the western hemisphere. We should logically feel that we are at the beck and call of every neighboring South American republic to fight its battles against European powers. This is a pretty serious burden. It may lead to congratulatory messages from the countries whose cause we espouse, but it will act as a constant menace to our peace.

But the Monroe doctrine never will or can lead us into a more fatal consequence than a war with England. Our every interest is so tied up with her that whatever our animus may be, the contest would have the aspect of a civil war. The similarity of natures, the identity of language, the ties of blood relationship between the two countries, the friendship engendered by the great amount of intercourse which has of late years obtained between the two lands, are elements which would give to any contest the nature of fraternal strife. The business aspects of the case are no less serious. Our vast exports are sold to England and are carried in English ships. She is our great customer for cereals and cotton and other products in which we act as almost the world's purveyor. If a war occurs between us and our best customer, every blow we strike at her prosperity is a blow at our own.

The first week of the war would do incalculable millions of damage; the succeeding weeks would see republican and representative government made contemptible in the eyes of the world, while lives and property would be annihilated in battles of unimagined destructiveness.

The simple message of the President, which message seemed to threaten war, has already had far-reaching consequences. The fall in prices of securities and in produce represents an enormous aggregate. This would tend to bring people to their senses, unless by the perversity of human nature the misfortune be seized upon as an excuse or a reason for incurring others—a species of desperation which may find a precedent easily enough in the workings of human nature.

The finances of the United States, under what seemed to be conservative treatment, were progressing satisfactorily. Difficulties had arisen and had been met by the issue of bonds, and new issues were contemplated. All this went on smoothly because of the high credit of the country. Now, a week has changed it all. The further issue of bonds, in proportion as it becomes more difficult, appears more necessary. The very hopes of the Administration are defeated by its own act. The Christmas season of 1895 will be long remembered by those ruined in the crisis brought about by needless precipitancy. Already in the impairment of the value of securities and in the injury to the country's credit our standing, in a possible war, has been impaired.

THE NAVAL RESOURCES OF THE UNITED STATES AND THE BRITISH EMPIRE—A COMPARISON.

Captain A. Mahan, of the United States navy, has pointed out in his celebrated work on the influence of sea power in history, that a preponderance of naval power has been the controlling element which has ultimately brought victory to the nation that possessed it. His conclusions are largely based upon the European wars of the time of Nelson, and the late civil war in America.

In view of recent startling and ominous developments in the diplomatic relations of this country and Great Britain, it will be, we think, timely and interesting to inquire into the present status of the navies of the two countries, and also to inquire as to what are the battleship-building resources possessed by each. It should be noted that in the subjoined tables no account is taken of ships that possess a speed of less than 7½ knots per hour, or that are armed with obsolete smooth bore guns. Ships that are building, but within measurable distance of completion—such, for instance, as the Iowa—are included in the following tabulation:

FIRST-CLASS BATTLESHIPS OF THE LINE.

	Total number.	Average displacement.	Average speed.	Belt armor.	Total displacement.
United States	4 ships.	10,568 tons.	16·42 knots.	18 in.	42,274 tons.
Great Britain.	29 "	13,000 "	17·47 "	18 "	376,900 "

SECOND-CLASS BATTLESHIPS.

United States	3 ships.	5,703 tons.	16·7 knots.	12 in.	17,110 tons.
Great Britain.	12 "	9,502 "	13·63 "	14 to 24 "	114,030 "

THIRD-CLASS BATTLESHIPS.

United States	5 ships.	4,404 tons.	11·9 knots.	7 to 12 in.	22,020 tons.
Great Britain.	11 "	7,075 "	13·43 "	8 to 12 "	77,820 "

COAST DEFENSE BATTLESHIPS.

United States—The 6 knot boats armed with smooth bore guns are reckoned as obsolete.

Great Britain.	13 ships.	4,040 tons.	11 knots.	8 to 12 in.	52,530 tons.

TOTAL BATTLESHIPS OF ALL CLASSES.

United States	12 ships, with a total displacement of				81,404 tons.
Great Britain	65 "	"	"	"	" 621,280 "

In estimating the relative strength of the two navies from the above table, it must be borne in mind that the basis for comparison should be the total displacement, rather than the total number of ships. Displacement is the capital which the naval designer has to go upon; and if he make a judicious distribution of weights, he will always produce the more effective fighting machine out of the bigger ship. If a 10,000 ton and a 15,000 ton ship carry the same armament, the larger vessel will carry that armament more steadily, more speedily, with greater command, and, owing to the wider separation of the individual gun stations, with less exposure to disablement of guns and crew. Estimated on this basis, Great Britain possesses a superiority of fighting power in first-class ships-of-the line of 9 to 1. In battleships of all classes the superiority is 7½ to 1.

FIRST-CLASS ARMORED AND PROTECTED CRUISERS.
(Of 20 knots speed and upward.)

	Total number.	Average displacement.	Average speed.	Total displacement.
United States.	5 ships	7,700 tons	21 9 knots	38,500 tons
Great Britain...	9 "	9,233 "	21·0 "	83,100 "

FIRST-CLASS ARMORED AND PROTECTED RUISERS.
(Of 19¾ knots and under.)

United States..	none	—	—	—
Great Britain...	21 ships	7,581 tons	17·0 knots	159,200 tons

SECOND AND THIRD CLASS PROTECTED CRUISERS.

United States..	14 ships	3,288 tons	18·23 knots	46,028 tons
Great Britain..	60 "	3,828 "	19·20 "	229,605 "

LOOKOUT CRUISERS.

United States..	5 ships	1,519 tons	16·73 knots	7,593 tons
Great Britain...	19 "	1,907 "	17·00 "	36,240 "

GUNBOATS.

United States..	7 ships	1,007 tons	16·00 knots	7,300 tons
Great Britain...	34 "	841 "	19·00 "	28,580 "

TOTAL CRUISERS OF ALL CLASSES.

United States	31 ships, with a total displacement of				99,421 tons.
Great Britain	143 "	"	"	"	" 536,725 "

Estimated, as before, on the basis of displacement, this table shows a preponderance for Great Britain in cruisers of 5½ to 1.

Of merchant steamers which are built to meet the naval requirements for conversion into cruisers, the United States have 4 and Great Britain 26.

TORPEDO BOAT DESTROYERS BUILT AND BUILDING.

	Number.	Displacement.	Speed.
United States	——	——	——
Great Britain	62	250 tons.	28 knots.

TORPEDO BOATS.

United States	10
Great Britain	166

By displacement, the preponderance in torpedo boats is 40 to 1.

© 1895 SCIENTIFIC AMERICAN, INC.

Summing up the totals for battleships and cruisers combined, we get:

United States..... 43 ships, with a total displacement of 180,825 tons.
Great Britain ..... 208 " " " " " 1,158,005 "

Which shows Great Britain to possess a superiority in fighting ships of all descriptions of $6\frac{4}{10}$ to 1.

In the event of a war with that country, these are the odds against which we should have to contend at the outset.

As against this unpromising opening it will be urged that we are a resourceful and energetic people, and that we should quickly create a navy. To this it must be answered that modern navies are of slow growth—they are not created. The modern battleship, costly and intricate, puts a heavy discount upon mere resourcefulness and energy, of which we have abundance, and a heavy premium upon gun, ship, and armor building plant, of which, for the magnitude of the task in hand, we should find that we possessed an altogether inadequate supply. With every factory, mill and shipyard working at full blast, it would take from seven to ten years to cancel that preponderance of $6\frac{4}{10}$ to 1.

There is no sentiment in statistics.

It is certain, moreover, that Great Britain would steadily add to her fleets as the war progressed; and with her great shipbuilding facilities she could float six ships to our one, as the following facts will show: In reply to inquiries instituted by the British Admiralty last year to ascertain the extreme warship building capacity of the private yards, it was found that, if these firms were given a free hand as to the details of the designs, they could build another navy, equal in fighting strength to the whole existing British navy, in from two to three years! To this must be added the building capacity of the government dockyards and shops. The astounding resources revealed by this investigation call for no elaboration on our part to show that Great Britain could rapidly increase her preponderance of naval strength, if challenged to do so.

The fact that European diplomats seem disposed to take the British view of the question at issue makes it highly probable that, in the event of hostilities, we should have to engage this colossal navy, with the power of reduplication which lies behind it, unaided.

Incidentally, in closing, we would remark that the ink is scarce dry upon the paper in which our general in chief, Nelson Miles, has just told us that the very opening of hostilities with a great naval power would see every sea-coast city, on the Atlantic and Pacific, subject either to the humiliation of an indemnity or to the horrors of bombardment.

In making the foregoing comparison it is assumed that the United States would not submit to a conflict merely defensive—that her enterprise would soon cause the field of naval operation to become conterminous with the shore lines of both hemispheres. The estimate consequently assumes that the total force of both fleets would be available.

THE UNITED STATES BUREAU OF STEAM ENGINEERING.

Engineer-in-chief Geo. W. Melville, in his annual report for 1895, recommends that the sum of $300,000 be spent in providing the cruiser Atlanta with new machinery and altering her from a single to a twin-screw ship.

According to Brassey's Naval Annual, the Atlanta is a steel cruiser of 3,189 tons displacement and 16·33 knots speed. She carries two 8 inch guns, six 6 inch, two 6 pounder quick-fire guns, two 3 pounder quick-fire guns, and eight smaller quick-fire guns.

It seems that, though her present engines are of an obsolete type, the hull is "an excellent one, and well worth new machinery." With machinery of 5,400 horse power (her present horse power is 3,511), of the same type as that in the newly constructed Marblehead, the report states that we should "then possess a cruiser equal to any of her class afloat." The new machinery would weigh 142 tons less than the old; it would enable the ship to carry more coal; and it would give her 2 knots higher speed, equivalent to between 18 and 19 knots an hour.

The same changes are recommended for the Boston, a sister ship. The Chicago is at present being re-engined.

In these days of high speed cruisers, the above addition of 2 knots to the speed of these boats will practically add two new ships to our navy.

The value of liquid fuel for marine purposes is being determined by a series of tests on one of the torpedo boats of the Maine. It is recommended that one of the gunboats building at Newport News be made use of to carry out these experiments on a larger scale. Naval designers the world over have for some time past recognized the fact that if the use of liquid fuel can be rendered practicable in the navy, it will largely increase the radius of action of seagoing ships. To the United States the question of the use of petroleum fuel is of double importance, both on account of the abundance of our supply of this combustible and even more on account of our paucity of coaling stations. The range of action of the modern warship is limited by her coal capacity and the distance of her field of operations from the nearest coaling station.

A nation which possesses few of these must provide its ships with specially large bunker space, as in the case of the cruiser Columbia. Any device which will enlarge the fuel endurance of warships will be specially valuable to the United States; and there is nothing in sight to-day which would so effectually do this as the substitution of oil for coal in marine boilers.

Speaking of the use of water tube boilers in the navy, Mr. Melville recognizes the necessity for a boiler lighter than the well known Scotch boiler; and while admitting that many types of the water tube system have proved successful on shore, he is of the opinion that "no single type has yet made its appearance which can be regarded as an altogether satisfactory substitute for the Scotch pattern."

In view of the fact that the two cruisers Powerful and Terrible, of 14,000 tons displacement, now building for the English navy, are to be furnished with boilers of this type, the above statement by so distinguished an authority is significant. Mr. Melville evidently considers that for use in large ships the water tube boiler is yet in the experimental stage; and his opinion is shared by many naval experts on the other side, who strenuously opposed their adoption in these two costly ships.

THE JANUARY SKY.

Jupiter is still the only planet conveniently situated for observation. He rises now about 7 o'clock in the evening, so that by 10 o'clock he is well above the roofs and trees. The position of this planet among the stars is very interesting just now. On the first of January he is quite close to the fourth magnitude star δ Cancri, and a little south of the Beehive cluster in Cancer. Not only is a means thus offered by which those unacquainted with the stars may, with certainty, recognize this curious stellar region, but the picturesqueness of the view is increased, and a more striking idea of the profundity of space may be formed when one sees the united light of hundreds of distant suns outshone by the reflected rays from a comparatively nearby and insignificant planet.

Yet, although Jupiter may be called insignificant when compared with a sun, he is anything but insignificant when studied in his own character of a giant planet. It is an impressive thing, to any thoughtful person, to look upon a globe 1,300 times as large as the earth, and contemplate the bare possibility of its being inhabited, either now or at some future time. If I were asked, "What is the most instructive sight that the telescope reveals in the heavens?" I should be strongly tempted to reply, "The planet Jupiter, with his circling moons." There—and it is a spectacle not reserved for the possessors of the largest telescopes—one perceives the law of gravitation operating visibly on an enormous scale; one sees globes larger than the moon tracing out elliptical orbits so swiftly that a single evening's observation plainly reveals their change of place; one beholds eclipses with their mechanism displayed as the finest model could not do it; and the play of shadows on the face of another planet; and the movement of clouds; and the alignment of zones, shading off from a brilliant equator to dusky poles; and the rapid turning of a vast world upon its axis of rotation.

In reference to this rotation, I may remark that now, when the planet is visible the entire night, an excellent opportunity is presented to see one complete turn of Jupiter on his axis. Let the observation begin at 8 P. M. and end at 6 A. M. Between those hours the observer will have seen all sides of the giant planet in succession, and when he leaves the telescope the face of Jupiter will have resumed the appearance it had at the time his eye was first applied to the tube. And in the meantime he will have beheld many a scene that has puzzled the astronomers, for the surface of Jupiter is strangely and wonderfully variegated.

Venus is in Libra near Scorpio, and rises on the 1st of the month about 4 o'clock in the morning. At the end of January she will be in Sagittarius, rising about 5:30 A. M. Her reign is passing and will not be resumed until she reappears in the sunset next autumn.

Mercury is in Sagittarius at the opening of the month, too close to the sun to be observed, but about the 23d, when he is in the eastern part of Capricorn, he will be visible in the evening, more than 18 degrees east of the sun.

Mars is in Ophiuchus, moving toward Sagittarius, and on the 1st rises about 6 A. M.

Saturn remains a few degrees east of α Libræ, rising on the 1st about 3 A. M. and on the 31st about 1 A. M. But there are few who will care to break their rest even for the sake of beholding that most singular of celestial objects, a planet with rings, especially since, in the spring, Saturn will rise early in the evening.

Uranus is in Libra, not very far east of Saturn, and Neptune is in Taurus, well situated, but too faint for satisfactory observation, even with a telescope of considerable power.

The moon is waning when January opens, although but just past the full by a few hours. New moon occurs late in the afternoon of the 14th; first quarter on the evening of the 22d in Aries; full on the morning of the 30th in Cancer.

Perigee occurs an hour before midnight on the 3d, and apogee about the same hour of the night on the 19th. The moon is in perigee for a second time this month on the evening of the 31st.

The lunar conjunctions with the planets occur as follows: Jupiter on the 2d just before midnight (the planet will be less than 2° south of the moon, a pretty sight); Saturn on the evening of the 9th, invisible; Uranus on the morning of the 10th; Venus on the morning of the 11th; Mars on the morning of the 12th; Mercury on the morning of the 16th, invisible; Neptune on the morning of the 26th, invisible; Jupiter (second time), before sunset on the 29th.

The wonderful variable star Algol, in Caput Medusæ, is now well situated for observation. It will be at a minimum on the 9th, half an hour after midnight. The observer should begin to watch it, using either the naked eye or an opera glass, early in the evening, noting the gradual diminution of its light as compared with the small stars near it. It remains at minimum but a few minutes, although three or four hours are required for it to regain its full brilliance. Another minimum occurs on the 11th, at 9:23 P. M.

The star Myra, in Cetus, which is as remarkable among long-period variables as Algol is among short-period ones, is now brightening. It began to be visible with a field glass about the middle of December, and it will probably increase in brilliance for about two months. When brightest, it is sometimes of the third magnitude.

An occultation of the first magnitude star Regulus, or α Leonis, by the moon, will occur about ten minutes before 11 o'clock P. M. on the 3d.

The earth arrives at that point in its orbit which is nearest the sun at 1 o'clock on the afternoon of the 1st.

GARRETT P. SERVISS.

TO READERS AND SUBSCRIBERS.

The present number of the SCIENTIFIC AMERICAN brings to a close the labors of the year, and the next issue opens a new volume, a fresh page in the history of our work. To our many readers and friends, in all parts of the world, we offer hearty thanks for their generous support in the past, and we hope to merit the continuance thereof by faithful endeavors in the future.

The commencement of the year is the time when nearly all subscriptions fall due, and we trust our subscribers will be prompt in forwarding their remittances, thus avoiding the loss of numbers by the crossing off of their names. We earnestly hope they will send us, along with their own dues, the additional subscription of some friend or neighbor.

For this festive season it would be difficult to select a more desirable or appropriate gift than a year's subscription to the SCIENTIFIC AMERICAN publications. In the office, the shop, the library, the household, the SCIENTIFIC AMERICAN is always a welcome visitor, attractive, instructive and useful for every one.

The terms for the SCIENTIFIC AMERICAN remain as heretofore—$3 a year, postage paid by us. SCIENTIFIC AMERICAN SUPPLEMENT $5 a year. Both papers combined, $7 a year. BUILDING EDITION, $2.50 a year. All three publications $9 a year. Address Munn & Company, publishers, 361 Broadway, New York.

Cycle Notes.

Two bicyclists, Theodore and Eddie Kraguess, arrived in San Francisco a week ago, having ridden on their machines all the way from Minneapolis. The route they traveled was 2,856 miles long, and they rode it in thirty-eight days, an average rate of seventy-five miles a day. Some days they rode more and some less, and occasionally they rode until nearly midnight in order to keep up the average. They did not make the trip for money or glory, but for pleasure. They had very trying times on the windy prairies, the sandy deserts, and the snow-covered mountains, and will not try to ride back again. They carried a tent, blankets, cooking utensils, and also food on the long desert stretches, although in the main they relied for shelter and food on the farmers.

It is said the Bavarian Minister of War has authorized the purchase of 9,000 cycles which are to be used for the infantry and sharpshooters.

A proposition has been made recently by bicycle riders to several agents and manufacturers of bicycles that the manufacturers get together in a convention and agree to reduce numerous parts of their different machines to standard proportions.

In some respects the makers have been obliged already to agree upon standard sizes or parts, such as rims and tires. There is no reason why a similar agreement should not be reached regarding the fittings of almost every part, so that any repair shop, supplied with a reasonable quantity of standard repair parts, should be able to put any make of machine in order at short notice.—N. Y. Sun.

© 1895 SCIENTIFIC AMERICAN, INC.

A STEAM OMNIBUS IN LONDON, 1833.

The accompanying illustration, for which we are indebted to the St. James's Budget, represents the steam omnibus Enterprise, built for the London and Paddington Steam Carriage Company in 1833. This horseless carriage, suggestive as it is of many of the recent attempts to attain a practical motocycle, was one of the various efforts made to utilize the steam engine in its early days, before the development of the railway system had been marked out on comparatively fixed lines.

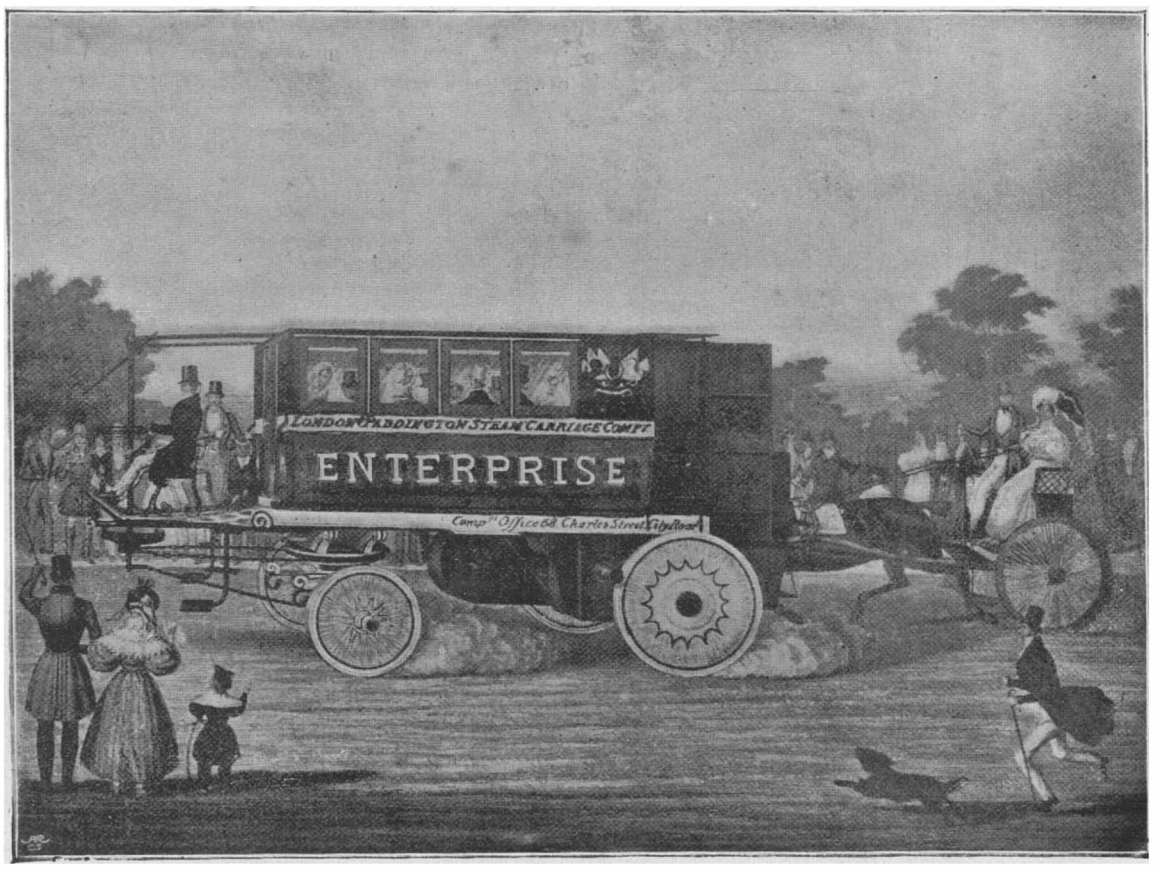

A STEAM OMNIBUS IN LONDON, 1833.

THE ELECTRIC SELF-PLAYING PIANO.

We illustrate in the present issue an electric apparatus for attachment to any ordinary piano, enabling it to be played by electricity without the intermediation of any performer. The characteristic features of the appliance are found in its simplicity, its capability of attachment to any piano without injury to the same, and its use of standard perforated music, thus placing at the disposal of its possessor a practically unlimited and thoroughly up to date musical library.

Directly under the keyboard is attached the music holder, consisting of the rolls upon and from which the perforated music sheets are fed. Electric contacts are provided for each note, which contacts operate through the perforations in the music sheet, so that each perforation closes an electric circuit. From the electric contact wires run to a series of electric magnets placed below and spaced from each other exactly as are the keys of the instrument, one magnet corresponding to each key. When the current passes a magnet attracts its armature, this occurring of course when one of the perforations of the music closes the circuit. A small sectional drawing shows in section the apparatus by which the work is done. At the bottom of the section is seen the end of a long brass drum which runs across the bottom of the apparatus and which is kept in constant rotation by an electric motor; this drum is also shown clearly in the perspective view. Extending from the end of the armature of each magnet is a metal friction shoe, the lower end of which forms a segment of a circle and is arranged to be brought in contact with the brass roller. A piece of rawhide is stretched over and cemented to the outside of the segment. When the armature is depressed, no direct effect is produced upon the action of the piano. All the depression of the armature does is to bring the rawhide-covered face of the circular segment into contact with the rapidly rotating drum. At once the friction throws the arc forward. From the upper end of the metal shoe a short arm projects at right angles, like the arm of a bell crank. From this a vertical striker arm rises and presses against the inner end of the key. It is evident that as the shoe is thrown forward the striker rod is forced upward; this raises the inner end of the key, depressing the outer end exactly as a performer would do, and the note sounds. It will be observed that the action of the piano is absolutely unaffected by the apparatus, whose motions bear the same reference to the piano as do those of an accomplished performer. This is so far true that a piano fitted with this apparatus is absolutely unaffected as regards its capacity for being played by hand. In the sectional view, the music holder can be seen, and one of the electrical contacts is shown pressing upon the sheet as it passes over a small central contact roller. Within the short width of the sheet of music are contained all the electric contacts, of which only one is shown in the sectional view. In operation, the music is wound off of one roller and on another. When the roll of music is exhausted, it has to be rerolled before the piece can be played again. This ordinarily, in the past type of automatic instruments, has been effected by hand, but this apparatus does that work also automatically. When the end of the piece is reached, the detent seen at the back of the music is caused to release the end of the carrier, which drops, and the rollers immediately begin to revolve with reverse motion, and in less than a minute the piece of music is rolled back on its original roller, ready to be put away in its case or to be played again.

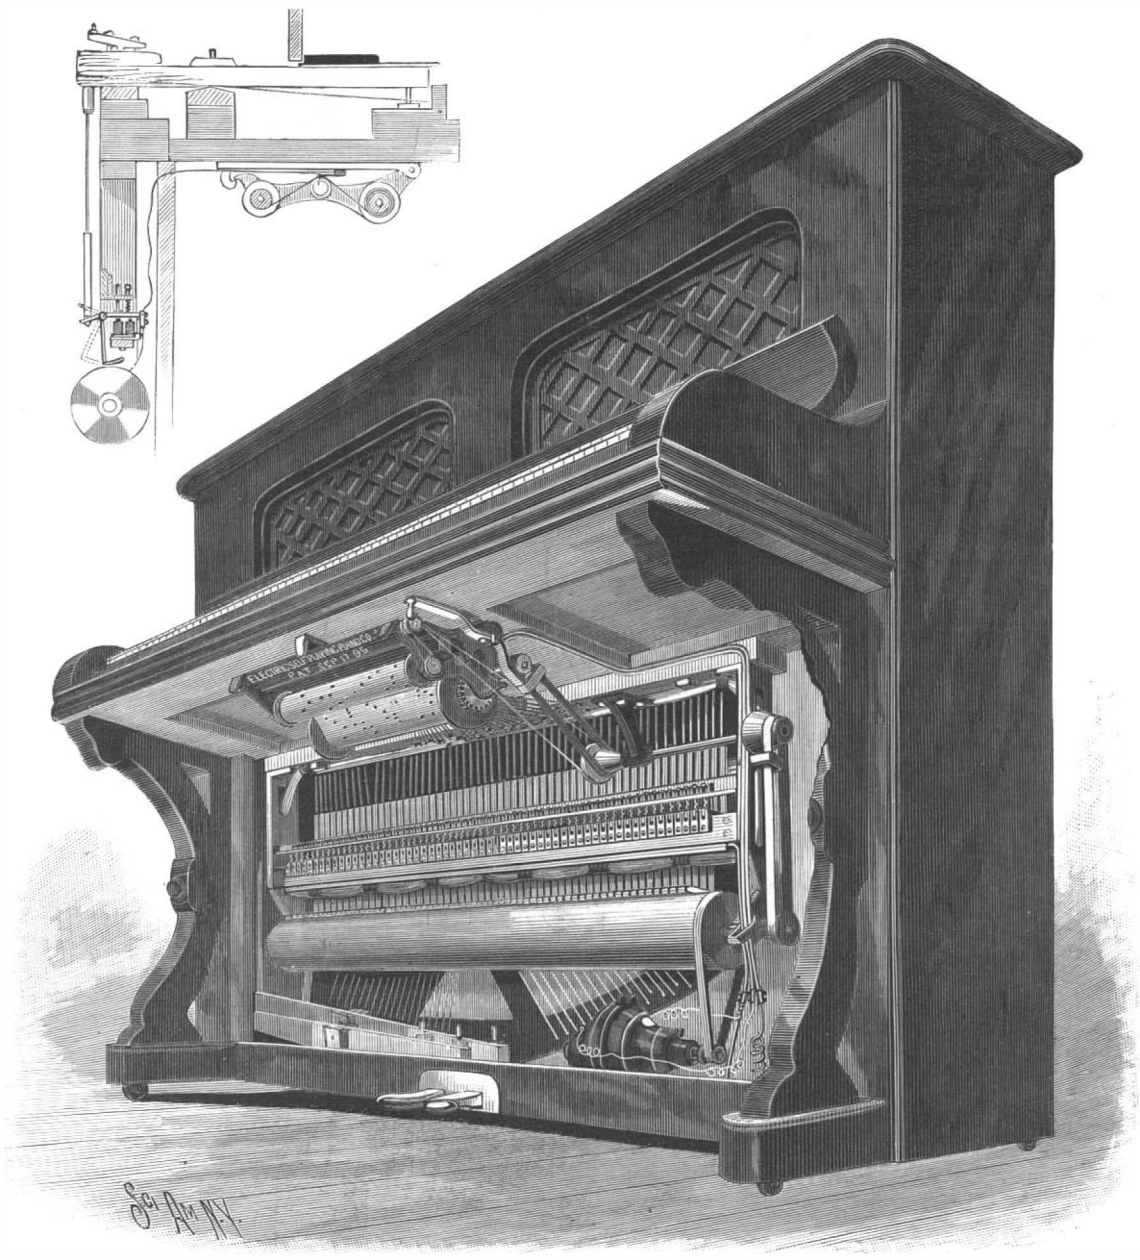

ELECTRIC SELF-PLAYING PIANO.

The tempo of a piece is fixed by shifting a belt which works on two cone pulleys. In this way the speed can be regulated with the utmost delicacy, the coning of the pulleys preventing all sudden change of time. The motor is seen in the base of the piano. It consumes from five to ten amperes at a pressure of four volts, ten amperes being required when several notes at once are sounded, as in chords.

The apparatus can be put in any piano without moving from the house, and the motor can be operated directly from the electric house supply or from a primary or secondary battery.

This wonderful piano is manufactured and sold by the Electric Self-playing Piano Company, 333 West 36th Street, New York.

The London Police.

The report of the Commissioner of Police of the Metropolis for 1894 shows that the authorized strength at the end of last year was 15,216. The number available for service, exclusive of those specially employed, whose services were paid for, was 13,497. The Metropolitan Police district embraces over 688 square miles. The mean ratable value of this area was £37,913,956; but of the enormous actual value of the property in charge of the police it is impossible to form any estimate. The report refers to the steady decrease in the number of felonies. While the population exceeded 6,000,000, the proportion of crimes against property per 1,000 of the population was but 3·106. The cases of murder were but 13, which is considerably below the average; and of these, 7 were due to insanity.

The cases of attempts to murder, wounding, etc., rose to 243, which is unusually high. The total number of criminal offenses of all kinds reported to the police was 20,970—a decrease of 497. The apprehensions numbered 14,902. As regards police work generally, including crime, the number of persons apprehended was considerably in excess of any previous year, and as compared with 1893 there was an increase of 3,346. The summary convictions showed an increase of 1,948, and were more numerous than ever before.

The Brooklyn Institute Museum.

The corner stone of the great museum building of the Brooklyn Institute of Arts and Sciences, on the Eastern Boulevard, Brooklyn, N. Y., facing Prospect Park, was laid on December 14 by the mayor of the city with appropriate ceremonies.

© 1895 SCIENTIFIC AMERICAN, INC.

BICYCLE POWER AIR PUMP.

The illustration represents a highly efficient apparatus more especially designed to serve the convenience of bicycle manufacturers for inflating pneumatic tires, and for which a patent has recently been granted to Frank N. Stevens, of the Davis & Stevens Manufacturing Company, Seneca Falls, N. Y. The pump is double acting and has two oscillating brass cylinders, each two by eight and one-half inches and each screwing at its lower end into a head with trunnions turning in bearings on the base, there being in the bottom of each head a packing ring which makes a very tight joint to prevent leakage. The piston rods, extending through the open ends of each cylinder, connect with

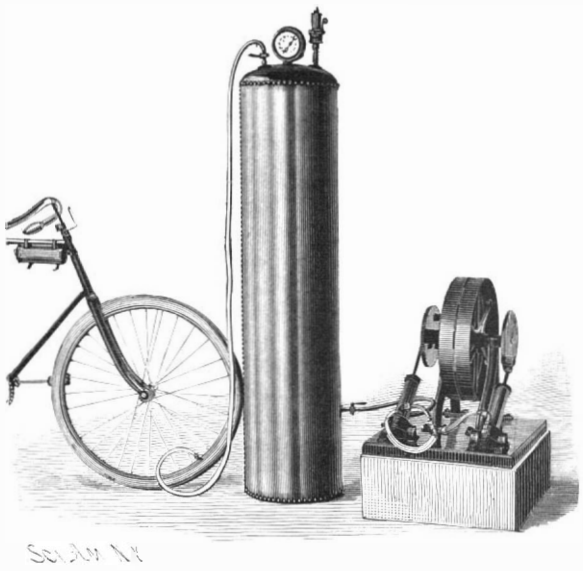

THE STEVENS POWER "CYCLONE" PUMP.

crank disks on a driving shaft on which are tight and loose pulleys eighteen inches in diameter, the disks having their wrist pins set opposite each other, so that the pistons compress the air alternately to insure a continuous operation of the pump, which is also adapted to be operated by hand power. Each piston is formed with a cup of leather or rubber, into which fits an expansible disk or spreader with slotted flaring sides, in which washers are held by a nut screwing on the lower threaded end of the piston rod, so that the sides of the cup are made to form a close contact with the inner surface of the cylinder. The valve casing at the bottom of each tube has an outlet valve communicating with a tube which is connected near its middle with a tank or reservoir in which the compressed air is stored, this tank being made of different capacities and being provided with pressure gage, safety valve and stop cock. The construction of the pump is such that any part may be readily repaired in case of wear or injury.

AN AUTOMATIC BELT SHIFTER.

The illustration represents an improvement in belt-shifting devices where the operating shaft has a central fixed or drive pulley, a pair of loose pulleys at each end, and a straight and a crossed belt, the shifting bar being automatically moved by the running machine. The improvement has been patented by George A. Smith, and is being introduced by Cohoke Woodenware Manufacturing Company, Cohoke, Va. With the ordinary belt shifting devices the throw is frequently insufficient, and sometimes, when shifting the crossed belt from the loose to the fixed pulley, both belts will be left upon the loose pulleys, and the improvement provides a shifting mechanism which, when acted upon by the first part of the movement of the operating rod or bar on the machine, stores up power sufficient to cause the shifting bar to move continuously to the completion of its stroke. The larger view shows the improved device applied to a grinding machine, where the front end of the shifting bar is pivotally connected to the inner crank end of a rocker or vibrating member, which has on its outer end a corresponding crank arm adjustably connected by a stout coil spring with the operating rod or bar on the frame of the machine, stops on the latter bar being engaged by the carriage at the end of each reciprocal movement. Eyes at the ends of the coil spring afford means for adjusting the tension of this yielding connection, by which power is stored up to continue or complete the shifting action of the shifting bar, and make positive the shifting of the belts. The smaller figure shows the position of the belts and the shifting bar in full lines, the dotted lines indicating the position to which they are brought by the yielding connection, such position being attained instantly after the carriage and operating shaft is momentarily stopped, the fast pulley having been freed of either of the belts.

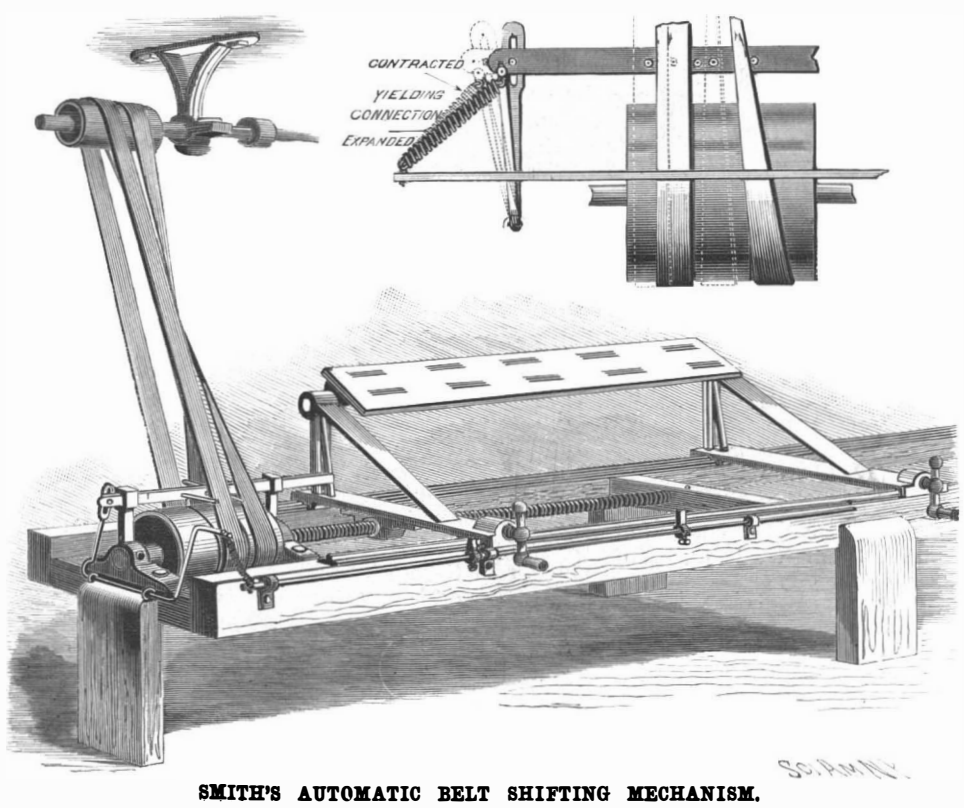

SMITH'S AUTOMATIC BELT SHIFTING MECHANISM.

Fire Balls at Sea.

One of the most remarkable electrical storms at sea, which probably seemed intensified by reason of the fact that a cargo of Spanish iron ore passed through it, was experienced by the British steamship Mercedes, which arrived at this port recently from Bilbao. On the Grand Banks of Newfoundland during the nights of December 3 and 4 the ocean appeared like a mighty mass of flames or an endless stretch of prairie fires. Balls of electric fire hissed and exploded in all directions and darted among the vessel's masts and rigging.

The Mercedes' escape from going down on December 1 seemed little short of a miracle. She was struck by a south-southwest gale, which was accompanied by seas rolling fearfully high. During the height of the storm a huge deck derrick, weighing many tons, was torn loose from its fastenings and swept overboard, leaving a hole in the vessel's deck through which the water ran into the cargo. In its course it carried away the maintopmast, which was also of iron; part of the flying bridge, the after winch, and part of the deck fittings. The decks were flooded with tons of water, the ship rolled at an angle of seventy degrees, and the sea broke in all directions, filling the cabin and the officers' quarters.

Soon afterward the storm partially subsided, when the electrical fire appeared in all directions. It hung in big balls for two nights from the masts and fore and aft stays, and practically turned night into day. As the big fire balls came together they would burst with a loud report upon the vessel and disappear. Under this light at night such temporary repairs were made as were deemed necessary to reach port.

Captain Tait of the Mercedes stated that the passage was one of the most trying experiences of his life. The rolling and lurching of the vessel in the storm and the fury of the gales were terrific in the vicinity of 25° longitude. Only the heroic work of the officers and crew saved the vessel.—Phila. Record.

ALUMINUM is being used in making the bodies of cabs.

A BICYCLE ADAPTED TO CARRY TWO PERSONS.

To facilitate carrying on the ordinary wheel a passenger in addition to the one who is propelling the machine, and to hold a lady's skirts out of contact and entanglement with the wheels, the improvement shown in the accompanying illustration has been patented by Harry J. Getman, and is being introduced by Henry A. Lederle, of Traverse City, Mich. It consists of an elongated clip frame attachment, shown separately in the small view, and composed of two parallel rods joined at the front by a block, and connected to the rear upright by a bolt, the front portions of the frame resting on the collar of the bicycle frame. Securely attached to the front of the clip frame is a transversely bent rod extending to one side, on which is a seat, while bolted rigidly to the opposite side of the clip frame is a skirt or leg support, composed of a framework of metallic rods, over which is secured wire gauze or netting. This support extends rearwardly and outwardly from the left hand side of the machine, and curves downwardly from the clip frame, to conveniently support the limbs and skirts of the person on the forward seat and afford such a balancing of the weight as will prevent undue torsional strain of the parts, and avoid liability of breaking or bending.

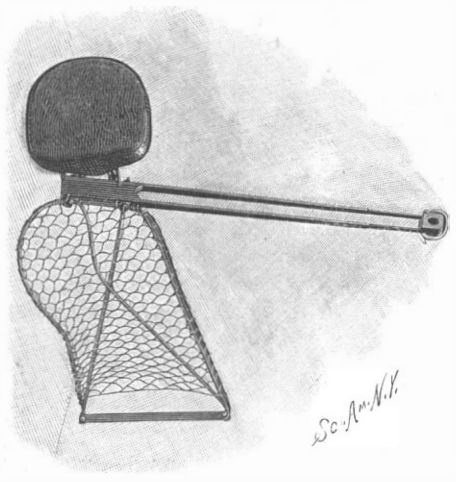

LEDERLE'S BICYCLE ATTACHMENT.

Force of the Human Jaws.

Experiments are reported to have been made by Dr. Black, a dentist of Jacksonville, Fla, to determine the force exerted by the human jaws in chewing food, and also the greatest force which the jaws are capable of exerting. By means of a spring instrument provided with a registering device he took—according to the account given—records of about one hundred and fifty bites of different persons, fifty of these being preserved as characteristic of the ordinary man, woman, and child. The smallest pressure recorded was 30 pounds, by a little girl seven years old, with the incisors, but, using her molars, the same child exerted a force of 65 pounds. The highest record was made by a physician of thirty-five, the instrument used registering only 270 pounds, and he simply closed it together without any apparent effort, there being also no method of determining how far above that figure he could have gone, and the test was made with the molars. Several persons exceeded a force of 100 pounds with the incisors and 200 with the molars. Dr. Black states that the physical condition of the persons experimented upon seemed to but slightly influence the result, and he is of the opinion that the condition of the peridental membranes is the controlling factor, rather than muscular strength; and further, that in the chewing of food much more force is habitually exerted than is necessary.

© 1895 SCIENTIFIC AMERICAN, INC.

The Chiffonniers of Paris.

Ragpickers' Town reminded me of some ancient, tumbledown fishing village, and certainly it was hard to realize that this was positively the city of Paris at the end of the nineteenth century. Space, it would seem, was at a premium in the Cité Doré, for utensils of different kinds ornamented the outside walls, and here and there a cradle swung lightly from its rusty nail. Many of the houses boasted of but one room, in which were, often, neither furniture nor bedding; a bundle of rags did duty for the latter, and in truth it was a case of rags, rags, raggedest of rags everywhere. The ragpickers were seated on their thresholds, or as near the door or apology for a window as it was possible to get. Here and there an ancient chiffonnière was patching together old remnants, but most of the men were classifying their merchandise spread upon the floor. These were the trieurs or sorters, whose business lay in dividing the odds and ends into their various classes before reselling them to the merchants en gros. The white rags had to be sorted from the colored, and the silk from the cotton or woolen. The woolen ones, I found, were prized the most, as they brought in nearly thirty francs the 100 kilos, while the silk were worth only seven. The chiffonniers collect over 50,000 francs' worth of pickings in one day (statistics of 1889), and nothing comes amiss to them.

I begged permission of an old chiffonnière to sketch her as she sat at her mending, and then the motley crowd, which had all the time followed closely at my heels, promptly surrounded me. The elders did not appear to view my movements with much favor at first, but their scowls were soon turned into broad grins by a general distribution of the cigarettes. The packet could not go all round, it is true, but it went far enough, at least, to make the inhabitants of the Cité my friends. They were a tough enough looking set, on the whole, but most of the older women appeared to suffer with inflammation of the eyes, and many of the children also—a thing easily to be accounted for by a glance at their grimy hands. Still the eye trouble was the only one which affected them very much apparently. Though irredeemably dirty, the children looked bright, happy, and healthful. And they had reason to, living as they were in an open quarter of low houses, where the sun could stream down on them and the air play around them—a sensation rarely to be experienced in the narrower Paris streets, where the immense height of the apartment houses keeps off, for the greater part, these two most important health factors. The young girls, too, had evidently their share of hardiness, and, with it, a sturdy independence of manner, not unbecoming the daughters of this liberty-loving race, and there were several quite pretty enough to warrant the existence of that romantic play of Bourgeois and Emery's, La fille du Chiffonnier, which created so much interest on the boards of the Ambigu a little while ago.

When I had made the round of the Cité, I attempted one or two sketches, and wherever I stopped, every window within sight would immediately become alive with heads partially obscured by the flapping rags which hung before most of the houses. I caught one old chiffonnière watching me complacently as she ate her supper, and called up to her to tell me, if she would, which was her quarter for collecting. She answered proudly, "The Opera," much to my surprise, for that part of Paris is five or six miles away. But I learnt that this neighborhood and the Chaussée d'Antin were the fat livings of the chiffonniers, and that a placeur will sell his right to empty the rubbish boxes of a few houses there for as much as 150 francs; for, although a coureur or roving chiffonnier's daily collection is seldom worth more than 1 franc 50 cents, that of the placeur, or chiffonnier with a regular situation, often amounts to seven or eight times that sum, and necessitates his bringing a hand or even a donkey cart.

It is chiefly in suburbs such as Malakoff, Ivry, and Gennevilliers that the chiffonniers now congregate, though formerly they were to be found in Le Petit Mazas, Le Passage du Soleil, La Cité Maupy, and La Cité de la Femme en Culotte, which last, though now destroyed, once brought its eccentric landlady, Mademoiselle Foucault, 12,000 francs per annum. But it is the Cité Doré as the home of the chiffonniers which is of special interest, partly on account of the historic records in connection with it in the reports of "Commission des Logements insalubres" (1853), on account of the many controversies over it, notably in the Revue Municipale (1859–60) and because of the personal supervision still exercised over it by Monsieur Doré's daughter from her manor overlooking it. This was once the Château of Bellevue, which up till 1848 was surrounded by its park of 10,000 square meters. After that date, Monsieur Doré cut the ground up into little lots, and let it out to horticultural-loving Parisians at 5d. the meter per annum.

An enterprising chiffonnier not only rented one of these, but with the aid of sardine boxes filled with clay, bits of old building material and tin, built himself a hut. He was the envied of all the crowd of chiffonnier friends who came to wonder and admire, and who were not long in following suit. They formed themselves into an independent republic to the number of 400, which by 1860 had increased to between two and three thousand. Until the speculators appeared upon the scene, the chiffonniers were thus their own landlords, which fact created in them that self-respect and independence which is not often found in others of a like class. Drink is their besetting sin, and it would seem that the fascinations of their special liquors, such as camphre, petit noir, fil en quatre, casse-poitrine, are not to be withstood. But though a liberty-loving race, these wild men and women of the outskirts are a peace-loving one too, and they are seldom in prison; yet from the beginning of their history they have been subjected to every kind of persecution. As early as 1698 they were forbidden by law to walk the streets before daybreak, and it is only since the Republic that the chiffonniers have been allowed to ply their trade without the once necessary adjuncts of government copper medal, certificate, basket, crochet (pronged stick), and lantern.—Englishwoman.

AN IMPROVED REEL.

The reel shown in the illustration is adapted to facilitate quickly throwing the gearing in or out of action, or retard the revolution of the pulley. It forms the subject of a patent issued to Thomas J. Halleck, of No. 506 West Thirty-ninth Street, New York City. From the plate fastened to the rod projects a pivot on which revolves the metallic hub of the pulley on which the line is reeled, the pulley having in its front face a recess closed by a disk on the forward end of the pivot, and the driving gear being located in the recess. On the

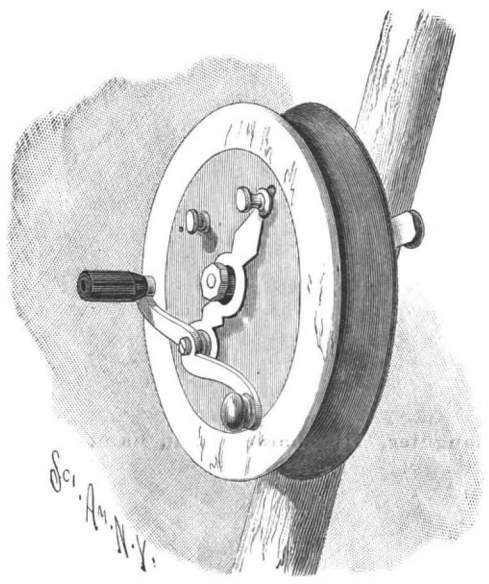

HALLECK'S FISHING REEL.

hub, in the recess, is a pinion engaged by a large gear wheel, whose shaft rotates in bearings on an arm that is adjustable on the front face of the disk, there being a handle on the outer end of the shaft, and the arm, which extends across the outer face of the disk, having at its center a larger recess for the outer end of the central pivot. On the opposite end of the arm is a knob and catch, the knob being connected with a spring disk, and, on lifting the knob, the arm may be pushed to move the bearing of the larger gear wheel, so that its gear will be out of mesh with the pinion on the pulley, the spring disk holding the arm in either position, as it may be placed. When the larger gear wheel is out of mesh with the pinion, the pulley is free to rotate loosely, permitting the line to unreel quickly for casting purposes, but such free rotation may be more or less checked, as desired, by a spring-pressed pawl, which also clicks on the pinion to give an alarm in case of a bite, or to prevent accidental unwinding. There is also a spring brake on the back side of the reel casing, to brake the pulley when casting.

Notable Engineering Achievements in the Great Lake Region.*

BY JOHN BIRKINBINE.

After exhibiting on the screen a map showing the proportions of the lakes as compared with Eastern States, and reference to the fact that three thousand vessels of total capacity of one and a quarter million tons float at elevations practically equivalent to the height of the statue of William Penn on the city hall tower in Philadelphia, the various methods of mining pursued in the region of Lake Superior were discussed. Starting with the preliminary log cabin, the first winch was illustrated, then the shaft, and finally the operating mine. Similarly, instances of the steam shovel and milling system of mining on the Mesabi Range of Minnesota; the deep underground exploitations of the hard iron ore mines of Michigan, and of the copper mines were referred to. A diagram was also presented, showing the great depth to which mining operations have been carried on, and the relation of these to ocean level and to that of Lake Superior. Views of hoisting and pumping machinery, methods of timbering, a timber squeeze, man engine, ore pockets at the mine, etc., were illustrated and referred to, a number of flash light views taken under ground by Prof. Denton, of the University of Minnesota, being part of the display. The docks from which ore is shipped, consisting of several hundred pockets with adjustable spouts, were described, and instances given where 2,500 tons of iron ore were deposited in a boat within forty-five minutes.

The "whale-backs," the steel canal boats, and other forms of vessels in use on the great lakes were discussed, and the facilities which they offer as means of transporting heavy freight referred to. The ore receiving docks on the lower lakes were then described. At these ore is handled from a vessel's hold after the buckets are loaded by stevedores, and conveyed several hundred feet back from the water for a cent or less per ton. The coal docks, both for shipping and receiving coal, and some of the special appliances were noticed.

In the matter of harbor improvements, special attention was given to the artificial entry to the harbor of Duluth and of the new breakwater at Marquette. The latter is a series of "beton" blocks, each about 100 tons in weight, formed in place, but leaving alternate spaces of 10 feet between each block, which was subsequently filled in by similar blocks, this being done to prevent any local settlement disturbing more than one 10 foot section. The enormous shipment through St. Mary ship canal was said to have been 13,000,000 tons in the eight months in which navigation was open in 1894, and it will probably approximate 17,000,000 tons the present year. The statement was also made that the average distance the freight was carried by water was over 800 miles, and the cost slightly less than 1 mill per ton-mile. The growth of this canal was demonstrated by the fact that although in 1856 a lock 350 feet long, 60 feet wide and 12 feet deep was considered ample for a century, by persons then well versed in local progress, in 1880 a new lock, 515 feet long by 80 feet wide and 16 feet deep, was opened, and the congestion was so great in 1894 with this canal that the average detention of vessels was over seven hours. A new lock, 800 by 100 feet and 20 feet deep, is now practically ready for service on the American side, while another lock on the Canadian side, 900 by 60 feet, will help relieve the congestion. These locks are to overcome the difference of level between Lake Superior and Lakes Michigan and Huron.

The Chicago drainage canal was then liberally illustrated, and facts concerning the 40,000,000 cubic yards of material handled were given. Among these was the average cost of rock excavation at 76 cents and dirt 22 to 28 cents per cubic yard. The material was largely handled, after the top lift had been removed, by means of cantilevers, cable-ways or swing derricks, which met with favor in the order named—a cantilever costing, however, about $28,000, while a cable-way cost but about $12,000. Few of the contracting firms owned their conveying apparatus, most of the work being sublet to conveyor companies. Drills which have bored from 90 to 130 feet per day in the limestone rock through which the canal is cut could penetrate but from 6 to 20 feet in the harder Lake Superior iron ores.

The propeller pump used at Milwaukee to flush the river by delivering about 40,000 cubic feet of water per minute was illustrated. The improved methods of constructing vessels for the lake traffic and the unique way of launching them sideways also received attention and illustration.

The railroad tunnel under the St. Clair River was shown in section and the statement made that during the season of navigation a greater tonnage passed through the St. Clair River than elsewhere in this continent.

The paper closed with a reference to the improvements at Niagara, and a statement that the engineering features of Lake Ontario and the canal between Lake Erie and Lake Ontario had necessarily been omitted to make the description complete so far as the upper lakes were concerned, although it was not claimed that all of the remarkable achievements of the engineer had been mentioned.

At the close of Mr. Birkinbine's remarks there was some discussion on the temperature of deep mines, and in answer to a question the statement was made that with fair ventilation it need not be uncomfortably warm. In some mines water found at a depth of about 1,500 feet is quite salt, and at a greater depth becomes acrid. Large masses of pure copper are often mined, sometimes with pure silver attached to them. The Quincy mine was cited as having yielded masses that were cut down to pieces weighing 10 tons so as to be put into the furnace.

* Abstracts from a paper read recently before the Engineers' Club of Philadelphia.

SIXTEEN new steamers of the largest class for passenger and freight business have been contracted for by the owners of the principal lines of steamers plying between New York and European ports.

© 1895 SCIENTIFIC AMERICAN, INC.

The Detroit Boiler Explosion.

Without a doubt the most disastrous boiler explosion which has occurred in this country, that is, so far as loss of life is concerned, was that in the Detroit Journal building, on Larned Street, Detroit, Mich., Wednesday, November 6, which reduced the four story building to kindling wood and resulted in the death of thirty-seven people, while many more were badly injured. The following account is given in Lord's Magazine:

The day force had just gone to work at nine o'clock in the morning when the building was seen to swerve and shake, the front and back walls fell outward, and in a few moments what had once been a handsome building was a mass of ruins.

Cries for help and shrieks from the wounded went up from the wreck. The general fire alarm was turned in and ambulances and engines hurried to the scene.

The concussion caused by the explosion was so terrific as to shake every building within several blocks of the Journal office.

Windows were broken and many persons were injured by falling glass. The Calvert building across Shelby Street from the Journal shook like a reed. Nearly every window on the Shelby Street side was blown in, including two heavy plate windows on the second floor.

The building directly opposite the Journal structure on Larned Street, occupied by the Free Press Printing Company, had scarcely a whole light of glass left intact, while the Arcade building, adjoining the Free Press, had the appearance of having gone through a wreck of its own.

The cause of the explosion at this date yet remains a mystery.

After part of the wreckage had been cleared away the rear end of the fatal boiler was found lying near the Larned Street wall. The sheet was torn straight across, just back of the steam dome, three-eighths inch of iron having parted like cardboard and heavy rivets broken as if they were matches. This piece of iron was spread out until almost flat, and was hurled with such force against the cylinder head of the engine that it was crushed and battered as if it were made of glass.

The east boiler did not come out, but was carried off its foundation and through the solid stone wall into the Davis cellar. The force of this blow bent the boiler near the steam dome, parted the seams, and bent the tubes. The crashing of this boiler through the foundation caused the collapse of the two buildings.

The safety valve of the low pressure boiler was found, but so badly broken that the inspectors were unable to tell whether it was in good condition when the explosion occurred or not.

The steam gage was found so badly damaged that no one could tell what pressure was registered at the time of the explosion.

There was not a solid joint left in the building, the west wall being driven out several inches and the east wall badly cracked and thrown several inches out of plumb. In fact, the entire building was moved on its foundation.

The boilers were in charge of Engineer Thomas M. Thompson, who was painfully but not fatally injured. His statement concerning the accident was as follows: He was in the mailing room when the explosion occurred, having left the boiler room ten minutes before. At the time the west boiler showed 65 pounds pressure on the gage and the glass tube indicated two gages of water. There was a low fire under the east boiler, the gages showing 15 pounds pressure and three gages water.

The boilers were licensed to carry 90 pounds of steam, the safety valves being set at 80. The boilers were plain tubular, 5 feet in diameter, 14 feet long, with 3 inch flues, and built by Stephen Pratt in 1884.

They were connected by a 5 inch main, from which ran the main steam pipe to the engine, with 3½ inch branch to the elevator pump. Smaller pipe connections conveyed steam to the heaters in the various rooms in the building.

The boilers were fired by oil, the supply being carried in two tanks with a joint capacity of 55 barrels. They were coupled with a T, from which 2½ inch pipes conveyed the oil to the burners beneath the boilers.

Mr. Thompson states that about two weeks before the explosion the blowing out of a manhole gasket caused him to place the east boiler in service until repairs on the west could be made. The west boiler was fired up the day before the accident and found all right, the engineer noting that the safety valve blew at the stated pressure.

He further said that one of the blow-off valves leaked, and Tuesday evening, when he shut down, he started the injectors and gave the boilers over three gages of water in order to have enough to start with in the morning.

On coming down the morning of the explosion the glass showed that about one inch of water had leaked out during the night. In this connection the engineer states a fact that may be an explanation of the cause of the accident.

There had been such a demand for steam that one boiler was not sufficient, and after he had thrown the west boiler into service, he fired the second furnace, with the intention of coupling them as soon as the gage on the east boiler should show 60 pounds of steam. As stated before, this boiler only showed 15 pounds when he left the room, and had not been coupled.

There is a possibility that the leaking valve had allowed nearly all the water from this boiler to escape during the night.

Mr. Thompson had just entered the mailing room when the accident occurred. He was hurled against a wall surrounded by clouds of steam. Near him was a chute leading down to the press room, down which he slid. Here he was found later by the members of the fire department and taken out through a window.

Mr. Thompson says that it has been his custom to blow off steam through his glass gages once a week in order to be sure they are not clogged. He is positive that he tried the water cocks the morning of the accident. He further stated that the oil gage showed about twenty-five barrels in the tank.

W. H. Wells, of the firm of Wells, Angell & Boynton, attorneys for the Newbury estate, which owned the building, says that Engineer Thompson was a thoroughly competent engineer and machinist, strictly temperate, and an associate member of the Y. M. C. A.

In October, he entered the classes in algebra and mechanical drawing at the night school of the association, and it is hardly likely that a man who at his age has strong character enough to study nights would become careless at his work.

As is usually the case, the engineer comes in for a large share of the blame for the casualty, and the grand jury have indicted him for manslaughter.

Tests of the boiler plate which are in progress may throw new light upon the case, but should the decision show that the cause was from low water, it, of course, will have to be laid at Engineer Thompson's door.

The public at large fails to realize how little stands between safety and danger in a boiler plant. The apparatus which has furnished heat and power for years without an accident is never noted, and the engineer is considered as an unskilled laborer to a great extent, or one whose duties consist of starting and stopping an engine or shoveling coal into a furnace; but, let an accident occur, and all this is changed. The engineer always comes in for censure until he is proved not guilty, and, as in the present case, is indicted for manslaughter. His character and habits are closely inquired into, and his ability—the first time that has been considered—is investigated.

In fact, then, and not till then, do the public for a moment think that the engineer should have been possessed of anything like ability which would carry him above the plane of an unskilled laborer.

It is to be hoped that some developments may come out of the investigations which will prove that the responsibility for the terrible catastrophe does not rest upon Engineer Thompson, and that all judgment will be suspended until the thorough investigation which is in progress shall have been completed.

Accident on the St. Paul.

A serious accident took place on the American line steamer St. Paul, at her pier in New York, on December 18, in which nine men lost their lives and several others were severely injured. The fatality was caused by the fracturing of the main starboard supply pipe just as the machinery was being started to test it before sailing. No definite statement of the cause of the accident will be made until a thorough investigation, which the company is now conducting, is completed. The explosion occurred about seven in the morning. The noise brought the officers and crew to the engine room. The steam was at once shut off and the work of rescue began. All of the men in the engine room were killed and all except two of the fifteen men in the boiler room and electrical compartment were badly injured. The pipe, which was 15 inches in diameter, snapped off at the elbow. The steam pressure was less than usually carried, being only 130 pounds.

Similar accidents have occurred on vessels of both the English and American navies. Two accidents of the same kind have occurred in stationary plants in New York City within a month. On November 26, the elbow in a pipe which supplied steam to the engine which runs a lighting dynamo in Hammerstein's new music hall, called the Olympia, blew out, resulting in the death of two men and the injury of several others. The main steam pipe is 10 inches in diameter. From this a 6 inch feeder runs to the engine, and fastened to this 6 inch pipe was the elbow which blew out.

It is suggested that the accident may have been due to a too rigid connection, causing the elbow to burst by the expansion of steam, or to the presence of cold water in the pipe, or to a defect in the elbow, which, it is said, appeared to be about one-sixteenth of an inch less in thickness in one place than in another.

On December 19 a steam pipe leading into the generator of a stationary engine in the Consolidated Gas Company's works at the foot of East Twenty-Second Street exploded, killing one man and injuring several others.

These sad examples show that steam supply pipes, as at present constructed, need improvement, and we trust that the subject will be carefully studied by inventors.

To Make Cloth Waterproof, but not Airproof.

To the query how can I waterproof a cloth without making it airproof at the same time? the following reply is given:

To make a cloth waterproof, but not airproof, is a demand that is difficult, if not impossible, to comply with. Let us simply imagine what is necessary, and we have: 1. The spaces between the threads must be filled; and 2. The sponge like condition of the textile fibers, by the force of which they absorb both air and water, must be neutralized. It is evident that the inlets for water cannot be closed without at the same time affecting in like manner the passage of air. It is true that air is finer than water, and the question could doubtless be answered, if figuratively speaking, such a treatment of the cloth were possible that the doors were barred against the entrance of the coarser fluid and the finer element were allowed to squeeze through.

By studying this question, we would come to the conclusion that such a thing might be possible, if we understood how to neutralize the spongy condition of the textile fibers referred to without having recourse to filling the interstices between the threads. As water passes through a cloth essentially because of the absorptive capacity of the latter, it would be necessary to annihilate this property of the fibers in order to effect the desired purpose. The way to do this is plain, and that is to impregnate the threads before weaving, but as this cannot be done for a number of reasons, the treatment of the ready cloth is the next recourse.

Several formulas for effecting this have recently been patented, and in one of them James G. Smith dissolves gutta percha and India rubber in paraffin. The latter melts between 122° and 165° Fah., and when heated to 212° or 230° Fah., it dissolves 100 per cent of its weight of gutta percha or India rubber. Upon this fact is based its adaptability for waterproofing cloths, but not airproofing them; 15 parts gutta percha or India rubber are to be dissolved in 100 parts paraffin and the solution, at a temperature of 158° Fah., is applied direct to the cloth to be impregnated, or what is still better, the solution is dissolved either with benzine or benzol, and the cloth is then drawn cold through this diluted solution until thoroughly saturated, any excess being removed with a current of air or else in a suitable manner by steaming.

Similar to the above method is one of Napoleon Lefebvre and Edmond Aron, who propose a fluid 1,000 parts of which contain 987 benzine or sulphide of carbon, 3 parts India rubber, and 10 parts paraffin.

Frangois Joseph Pescuard and A. P. E. Tardieu make a cloth waterproof without at the same time excluding air, which is necessary to carry off the perspiration from the body, by the use of the following fluid: 55 grammes India rubber, 2 grammes gutta percha, 300 grammes benzine, 25 grammes sulphide of carbon, 10 grammes essence of turpentine (terrebinthe), 200 grammes ordinary linseed oil, 70 grammes boiled linseed oil, and, according to circumstances, a little black or white (charcoal or zinc white).

It is said that the first formula is adapted in every respect for the object in view.—Industrial Record.

New Variable Star of the Algol Type.

Dr. Edward C. Pickering reports in Harvard College Observatory Circular No. 3 that the star B. D. + 17° 4367, magn. 9 1, whose approximate position for 1900 is in R. A. 20h. 33·1m., Dec. + 17° 56′, appears to be a variable star of the Algol type. On July 18, 1895, Miss Louisa D. Wells found that no trace of this star appeared on the photograph I 4359, taken with the 8-inch Draper telescope on September 26, 1891, exposure 16 m. On 71 other plates taken from June 30, 1890, to October 5, 1895, the star appears of its normal brightness. On December 12, 1895, at 10h. 42m., Greenwich mean time, Prof. Arthur Searle, who had watched this star on several nights, found it more than a magnitude fainter than usual. During the next half hour it diminished about half a magnitude more. Meanwhile, a photograph taken with the 8-inch Draper telescope, I 14036, confirmed the diminution in light.

Gas Engine Economy.

It is stated that the electric railroad at Lausanne is operated from a power house in which the dynamos are driven by two gas engines of 130 horse power each, built by Crossley Brothers, in England. They use a gas which is made in producers in the power house. The dynamos are run by belt. The working is said to be very economical, and the best result obtained has been an expenditure of 550 grammes of anthracite coal per horse power hour in ordinary service. The engines are run on an average 18 to 20 hours per day. A careful calculation has shown that the amount of fuel used is 1,300 grammes of anthracite per car kilometer.

© 1895 SCIENTIFIC AMERICAN, INC.

CLOSE OF THE ATLANTA EXPOSITION.

At the extreme left, in our illustration, is shown the New York State building, to the right of which is the Fine Arts building, with a frontage of 245 feet, and exterior of classical design. Still further to the right is the 150 foot high tower, with its chime of large bells, which has formed a notable feature, while at the extreme right of the picture, partially hidden by the foliage, is the United States Government building.

During the fourteen weeks of its continuance, the great Cotton States and International Exposition, which closes officially on December 31, has afforded a luminous record of the versatile industrial and educational advancement of the South during the past quarter of a century, and constitutes a fitting memorial of the energy, enterprise and liberality which now dominate throughout the entire cotton belt, no less than in other sections of the country.

That it has, in its wide scope, attracted such large numbers of exhibitors in all departments of art and manufacture, and such crowds of visitors from all sections of the country, are but evidences of the general recognition of the great importance of that new and vigorous industrial life which has but recently brought portions of the South into competition with New England and Pennsylvania. The work of the Exposition, in part educational and in part to promote commercial intercourse and enlarged exchanges of commodities, has been well done. It was conceived on a broad and generous plan, in which expense was not spared, and the experiences of previous expositions were wisely utilized. The Exposition park comprised a tract of 189 acres, the ground being most picturesquely located within two miles of the center of the city of Atlanta.

During the continuance of the fair the various railroads centering in Atlanta, well representing the entire railway systems of the country, made great reductions in their rates, with the result that the attendance was liberal from remote as well as from near-by points. This was particularly the case on the days especially devoted to different cities, representative delegations from Chicago, Philadelphia, New York, Brooklyn, Boston and many other cities making the days set apart for such local commemoration memorable as among the most interesting and exciting in the history of the fair.

THE ATLANTA EXPOSITION—VIEW LOOKING NORTH FROM THE PLAZA.

Increase of Naval Engineering Efficiency.

Senator Watson C. Squire has introduced a bill (S. 735) to reorganize and increase the efficiency of the personnel of the navy, to increase the usefulness and numbers of the corps of naval engineers, to induce the scientific institutions to provide a naval engineering reserve for time of war, to establish a naval engineering experimental station and to encourage the study of the mechanic arts and sciences, and particularly that of naval engineering, in the technological colleges of the country.

In the course of his remarks he said:

"I recently visited the flagship Philadelphia, and had great satisfaction in examining that splendid cruiser. Going through the vessel below the water line, I observed the vast amount of machinery, the complicated elements that enter into its construction, making the care of a modern vessel of war very important as regards the feature of steam engineering. One passes through compartment after compartment, and is almost lost in bewilderment in the mazes of the complicated machinery around him. It occurred to me that not enough attention has been paid to the personnel of the navy as respects steam engineering. Truly the propelling power is the soul of the ship. Without it the ship cannot be handled and is totally useless. This power is under the supervision of the engineer officers. Therefore it is needful to have a high order of personnel, a larger number of officers, and those of great attainments and proficiency.

"We are building in this country vessels that were unknown to former times, and we need adepts in the art of engineering and marine architecture. There is no way to obtain a suitable class of men except by preparing them in the various educational schools. Ships can be built, but men cannot be built. When war comes, if it should come, unhappily, we will need proper men to handle these great engines of war. The only way to have such men is to educate them in advance. I believe the provisions of the law of 1879 should be carried out, and that the schools and colleges of the land which apply for professors of steam engineering and naval architecture should be accommodated by the detail of officers for such purpose. But that is only one of the features which contribute to the practical merit of this measure.

"It is evident, too, that there is great danger of the breaking down of those officers. They are employed in very difficult work. To take care of all this valuable property requires a high degree of skill, and causes an immense strain upon the officers. It is well known that our battle ships cost about $4,000,000 apiece, and they are liable to have something out of order all the time. In fact, one of the officers of this corps told me that there is usually something out of order on a war vessel all the time requiring the attention of an expert. Oftentimes those officers have to submit to very severe physical strains. They have to go down and work in the hold of the ship, where the temperature ranges from 150 degrees to 170 degrees Fahrenheit, and this causes great physical exhaustion. I believe that the number of engineer officers should be increased so as to make provision for these breakdowns, and to enable a sufficient number of officers to be employed on vessels to allow for necessary changes in the supervisory watch. This branch of the service of the navy should be encouraged and dignified and rendered more attractive and popular to the cadets and those naturally fitted to become engineers, and for this and other reasons, that the officers should be given positive rank and title, so that a mere officer of the deck, perhaps an ensign, cannot control a commodore in the Bureau of Engineering, unless such officer shall be in command of the ship. I think, too, that the manner of selecting cadets and filling vacancies in the Engineer Corps should be changed so that Senators shall have the appointment of such cadets. Something must be done or the personnel of the engineering force in the navy will fall far below the proper standard. In fact, it may be considered relatively below it to-day, as shown by th report of the naval committee in 1892.

"We have in commission in the navy at this time forty-two vessels, with nineteen more vessels building, making in all sixty-one. It is useless to undertake to manage this vast interest without having competent men, thoroughly educated and prepared, and a sufficient number of them to provide for the necessary changes."

AN inch of rain falling upon an area of one square mile is equivalent to nearly 17,500,000 gallons, weighing 145,250,000 pounds, or 64,844 tons.

© 1895 SCIENTIFIC AMERICAN, INC.

THE CABLE REPAIR STEAMER MACKAY-BENNETT.

The present is peculiarly a scientific age, rife with great enterprises which have originated within the memory of most people. It is not a great many years ago when the completion of the first ocean telegraph was celebrated with great pomp and enthusiasm. Transoceanic telegraphy is distinctively a modern institution; as such it is necessarily controlled by modern methods.

One of the great companies, the Commercial Cable Company, owns and operates three complete submarine lines between Europe and the United States. To keep these cables in order this enterprising company has a fine steamer, the Mackay-Bennett, which was built especially for the purpose by John Elder & Company, at Govan-on-the-Clyde, at a cost of $320,000. She is 260 feet long, 40 feet beam, and 22 feet deep, and is propelled by twin screws driven by independent compound engines, each having a high pressure cylinder 15 inches in diameter and a low pressure cylinder 25 inches in diameter, the stroke being 3 feet. The combined horse power of the engines is 1,500. The gross tonnage of the vessel is 1,700 and the coal capacity is 750 tons. Her speed is 12 knots per hour.

The Mackay-Bennett is provided with three cable-holding tanks with a total capacity of 385 nautical miles; tank 1 holding 60 miles; 2, 195 miles; and 3, 130 miles. The central cores around which the cable is coiled are utilized as fresh water tanks. The steamer is fitted up with all the modern machinery for grappling, picking up and paying out cable. It is lighted throughout by electricity and is furnished with electric search lights, so that work can be carried on during the night. The steering is done by steam, and the necessary steadiness is secured by bilge keels. The vessel is provided with a bow rudder, so that it can steam astern. The maneuvering qualities are excellent. A staunch steam launch is provided, which is much used in work near the shore.

On the deck are placed two powerful engines for heaving in and paying out the cable. At the bow and stern are placed immense sheaves, as shown in our engravings, over which the cables pass when delivered or received. The engines for handling the cable are geared to drums 6 feet in diameter, 2 feet in width, each being mounted on a shaft 11 inches in diameter. The cable, which is wound several times around this drum, passes over quadrants or guides at the hatches. If it is being taken up, it is coiled around the core in the tank below, as shown in the large engraving. In this case it requires a powerful engine to bring it up from the depths of the ocean, but where the cable is paid out, it simply passes over the drum, which is then detached from the engines, and the paying out is controlled by a brake operated by the man on the platform. The cable in its passage to the bow or stern of the steamer goes under the sheave of the dynamometer, which indicates the amount of tension on the cable. The strain on the cable usually ranges from two to three tons.

On the upper deck at the bow and stern are electrical signals, by means of which the engineer in charge of the ship's engine and also the engineer in charge of the cable handling engines may be notified to stop, start, or go ahead or astern, fast or slow, as circumstances may require. Attached to the shaft of the drum is an indicator which shows the number of miles of cable paid out or taken in. On the deck of the steamer are guides which lead to the different tanks. The cable may be drawn from either of the three tanks by either of the cable handling engines. Upon the deck are carried buoys, which are launched and to which the cable is secured when it is desired to detach the cable from the steamer, and leave it to be subsequently picked up and extended. The cable tanks are watertight, and the cable is kept in water, and while the laying of a cable is going on, electrical tests are progressing continuously, so that any defect may be detected and remedied before the cable reaches its final resting place upon the ocean bottom. The electrical testing room has a very complete electrical equipment, and the electrician is always in attendance to discover and locate any faults.

To one not familiar with the characteristics of the electric current, it seems a difficult matter to locate a fault in an ocean cable hundreds of miles at sea, but a competent electrician can generally locate the fault within a few miles. The insulation of the conductor must be maintained in a very perfect condition; otherwise the cable is rendered useless. A puncture in the insulation of the diameter of a hair is sufficient to interfere with the proper working of the cable, and to necessitate the journey of the repair steamer to the point where such an apparently insignificant thing exists. On reaching the vicinity of the fault the grapnels are thrown out and the cable lifted to the steamer, when it is taken on board and dissected and repaired, the defective section being removed and replaced by a perfect piece of cable. The manner in which the cable is spliced is illustrated in Fig. 2. After the defective portion is cut out, the ends of the cable adjoining the splice are unwound, and the copper conductor at the center is laid bare. The ends of the copper conductor are scarfed and lapped, as shown; then the joint is secured by soft solder, after which a spiral wrapping of fine copper wire is laid over the joint, as shown at 3 in Fig. 3, four or five fine wires being laid on parallel with each other, forming a spiral wrapping of considerable pitch. Upon the first layer of fine wires another layer is placed which is wound in the opposite direction, thereby causing the wires to cross each other. These wires are soldered smoothly, the interstices being completely filled with the solder, and while the conductor still retains the heat acquired in soldering the gutta percha covering is worked over the joint, as shown at 4 in Fig. 3, the splice having been previously coated with a cement to insure the perfect adhesion of the gutta percha to the metal. The appearance of the cable core after the completion of this step in the process is shown at 5 in Fig. 3. A wrapping of gutta percha is now placed on the joint, as shown at 6 in Fig. 4, this part of the work being done with the greatest of care to avoid the slightest possible air space communicating with the conductor. The gutta percha covered conductor is served with marline (7, Fig. 4), and this is wrapped with fine twine, as shown at 8 in Fig. 4, and last of all the wire armor is replaced. The total length of the splice is from 40 to 80 feet. The operation of splicing the armor is practically the same as that of splicing any wire cable. The splice thus made is stronger than the cable and its electrical conductivity is also greater than that of the other parts of the cable. The Mackay-Bennett can lay cable at the rate of 6 to 8 miles per hour.

It is obvious that in laying cable it is necessary to know something of the character of the ocean bottom. It is especially desirable to avoid shallow places. The steamer is provided with the James "sentry and sounding machine," which

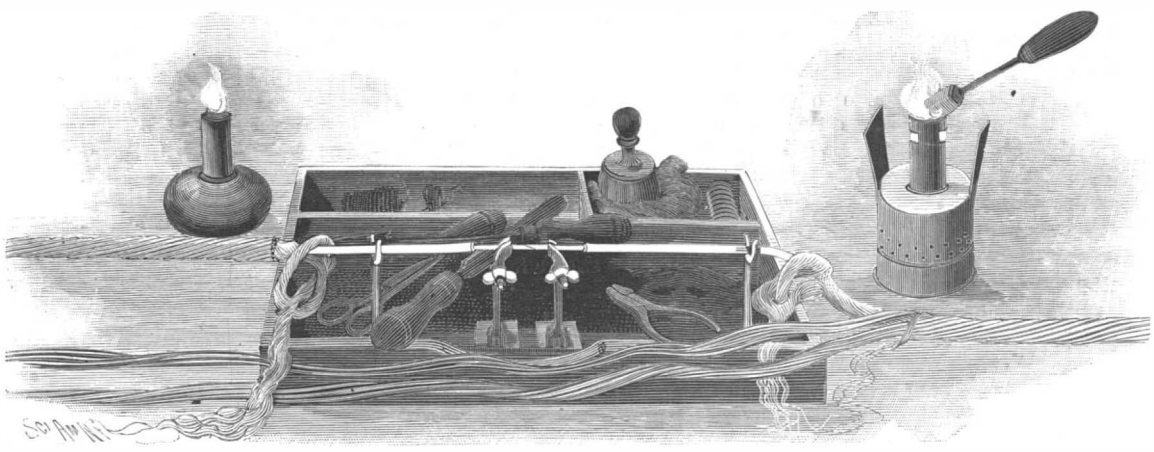

Fig. 2.—SOLDERING THE SPLICE.

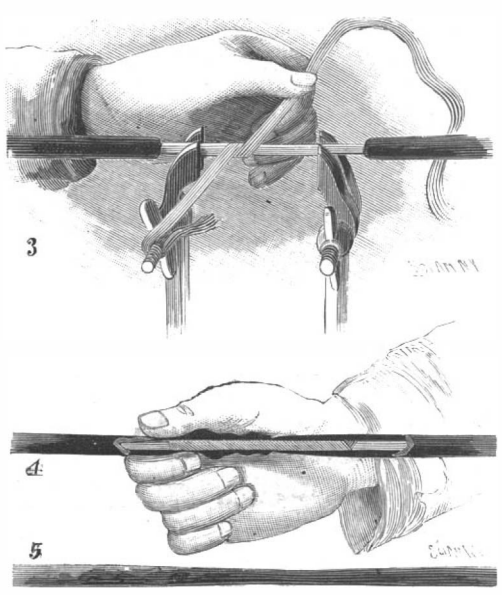

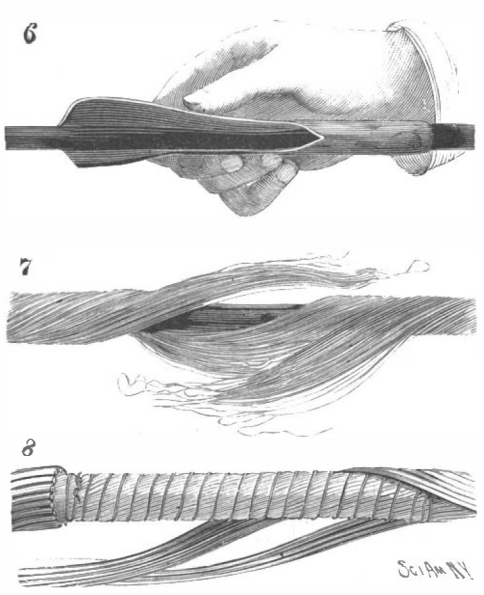

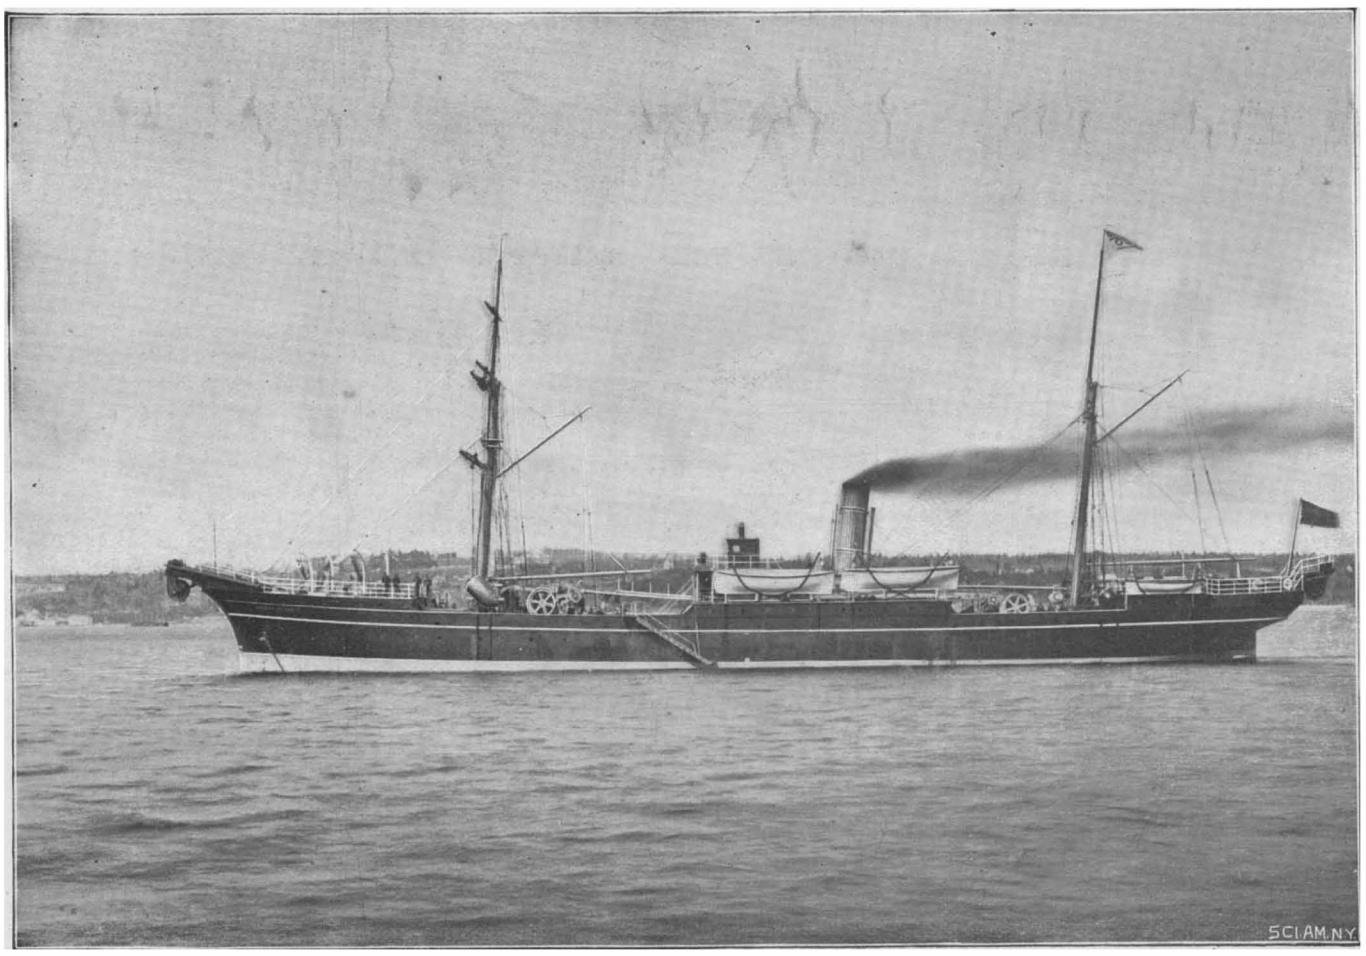

Fig. 7.—THE COMMERCIAL CABLE COMPANY'S REPAIRING STEAMER THE MACKAY-BENNETT.

© 1895 SCIENTIFIC AMERICAN, INC.

gives notice on board of the approach to shoal waters. A device called a "kite," shown in Fig. 6, is trailed behind the steamer, as shown in Fig. 5, being attached to the end of a piano wire wound upon the drum of the sounding machine. The kite is attached to the wire in such a manner that it dives under the stern of the boat to the minimum depth.

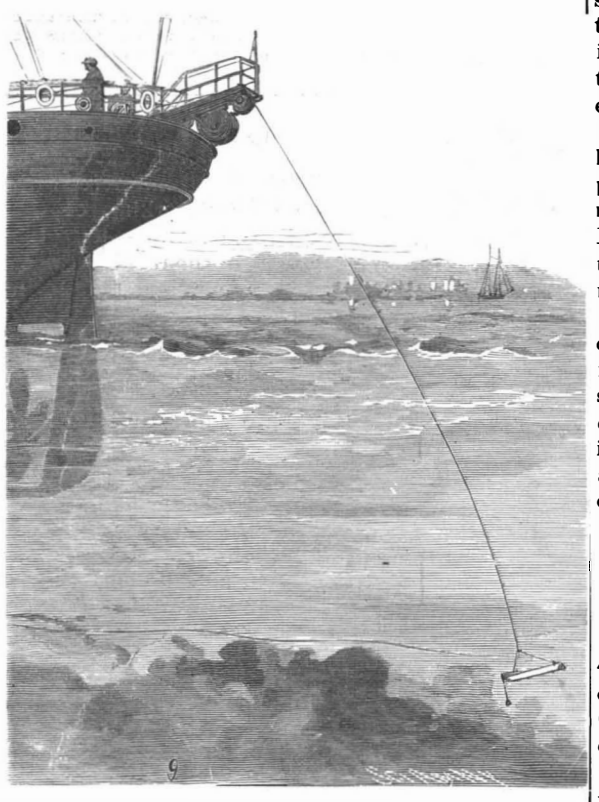

Fig. 5.—JAMES SENTRY AND SOUNDING MACHINE.

Should the steamer enter shallow water, the lever at the lower end of the kite strikes the bottom and releases the front end of the kite so that it trails behind the steamer at or near the surface and offers less resistance at the machine. The diminished pull causes a bell to ring on the sounding machine and another on the bridge. The sounding machine is adjustable for different depths. On the deck at suitable places are placed electric signaling machines, made by Eliott Brothers, of London, for communicating with the engineer of the paying-out machines and with the ship's engineer.

The Mackay-Bennett came on from Halifax in September last to lay cable for reporting the yacht race. The shore end of the cable was dropped at Coney Island at a point east of the Oriental Hotel. From this point it was laid out to the lightship, and an extra mile was run out in great coils to enable the ship to change her position if necessary. By the use of this cable, reports of the movements of the yachts were instantly transmitted to New York City, so that the progress of the race was better known to observers of the bulletins than to most of the actual spectators. Through the courtesy of Captain E. G. Schenk, Chief Officer W. F. Linton, Engineer J. W. Burn, and Electrician C. Priest, we were enabled to thoroughly inspect everything on board the steamer.

THE LOVELL ADJUSTABLE HANDLE BAR FOR BICYCLES.

The subject of adjustable handle bars for bicycles has received much attention during the past season. We illustrate in our present issue a new system of adjustment, which seems to possess all the desirable requisites while avoiding the difficulties which have been encountered in other ones put upon the market. In the upper part of the tube or handle bar stem is a double swivel joint, which receives the ends of the two handle bars, they being secured by bolts passing through them. The handle bars terminate in lugs, which fit within the swivel joints and which lugs are on their inner periphery provided with teeth. When the handle bars are in position, these teeth mesh into each other. This makes the movements of the bars interdependent. If one bar is raised, the other one rises with it, if depressed, the other one is depressed; hence the handles are always on the same level. Another feature about the bar is, that the inclination of the handles is invariable. In the usual type of handle bar when swung up or down the inclination of the handles varies so that in the upper and lower positions they are very uncomfortable, the inclination being only correct in one position. In the Lovell bar the inclination is always correct—one of the minor advantages of this bar applied in the storage of a bicycle when it is kept in the hallway of a house or other restricted space. This especially applies to shipment on trains, and when crated they can be shipped with bars in place, but dropped, there being no loose and attached handle bars to be tied on or otherwise disposed of.

The cuts show the bar in detail. Fig. 1 shows the handle bar when not in use or when ready for shipping on the wheel. Fig. 2 shows the mode of adjustment. Fig. 3 shows the bar inverted to its full height. Fig. 4 shows the bar about where it would be used by the average rider. Fig. 5 shows it as in use by a fast rider or racer.

As can be seen from Figs. 1 and 2, the handle bar can be adjusted to any position desired, so that the rider can have his handle bar adjusted to where it suits him best. This adjustment does not in any way change the position of the grips, and is the only one of its kind on the market which gives any adjustment and at the same time leaves the grips in a comfortable or natural position.

The manufacturers are the J. P. Lovell Arms Company, Boston, Mass.

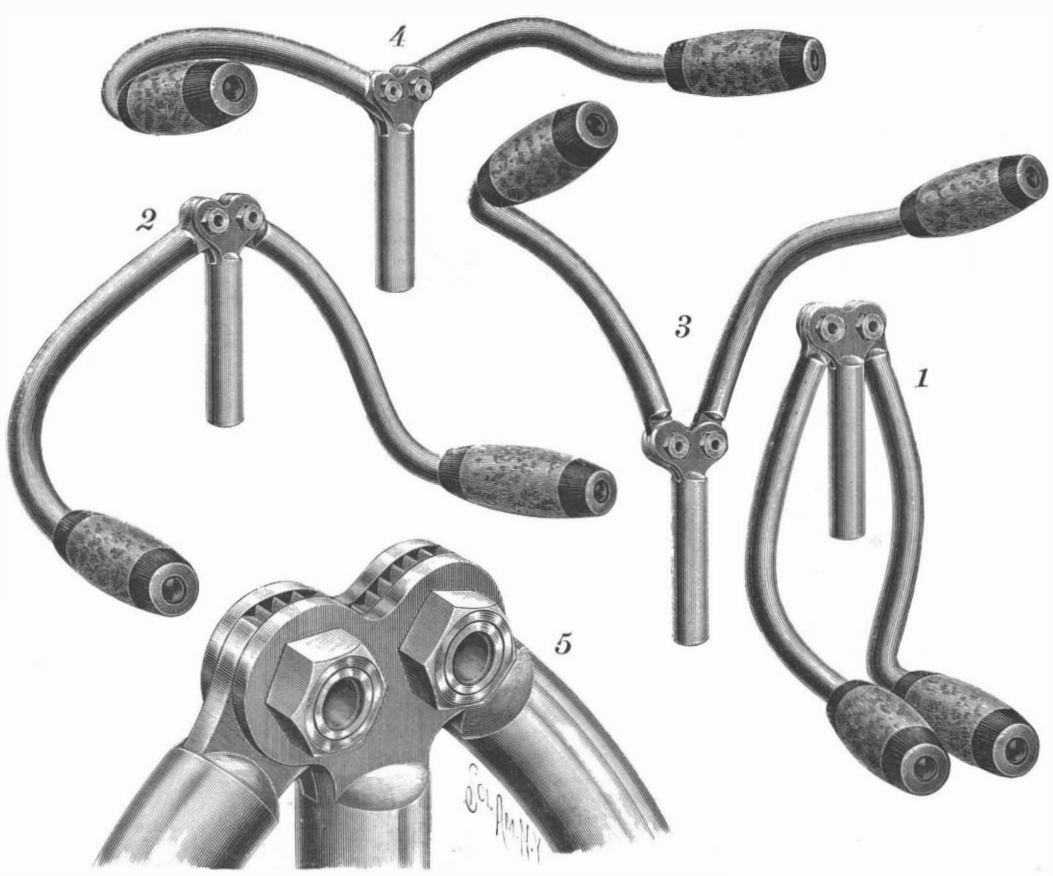

THE LOVELL ADJUSTABLE HANDLE BAR FOR BICYCLES.

Exploring the Colorado River.

The San Francisco Call says: 2d Lieut. F. M. Davis, 4th Cavalry, who accompanied 1st Lieut. C. L. Potter, of the Engineers, in his late expedition down the Colorado River, is busily engaged on his official report of the undertaking. Although the report is primarily prepared for official eyes, it will be no ordinary compilation of technical information and forbidding statistics. On the contrary, the report will record one of the most thrilling experiences which human beings ever survived. Speaking of their adventures, Lieut. Davis said recently: "Some time near the 1st of October Lieut. Potter received orders to proceed to investigate the possibilities of the Colorado River for navigation purposes, from the mouth of the Virgin River to Yuma. The understanding was that he was to proceed to the Needles and from there be towed up the river, a distance of 250 miles, by Indians."

The adventures of the party, as described in the Call, were very thrilling. As Indian boatmen refused to brave the cruel rapids of the treacherous river, two old trappers were hired, who, for $5 a day, were willing to undertake the risk. They were experienced watermen and cool headed. They had bow and stern lines, each 200 feet long, and at one point had to send the men up on cliffs 100 feet high, from which, by the aid of the lines, they would "snub" the boat around the ledges of the canyon walls. In one day, within six and one-half miles, they shot fifteen dangerous rapids. Before them seemed almost certain destruction, and to turn back was impossible. The further they went the deeper and blacker became the canyon. Concerning rapid No. 26, Lieut. Smith says:

"Here on both sides towered the steep black walls, 1,000 feet high. Between these walls for a mile there was nothing but angry, hissing foam. We examined first one side and then the other for ledges along which we might climb and draw the boat. It was useless, and to attempt to run that frightful place would have been madness. It was at this point that Major Powell's men abandoned him. We searched for the trail by which they escaped from the prison-like inclosure, but in vain. In our explorations I had sprained my ankle, and we were compelled to lie over a couple of days until I could walk. In the meantime Lieut. Potter investigated several branch canyons in the hope of finding a means of egress. On the Arizona side he followed a canyon for eight miles, to where it abruptly ended in a perpendicular wall 4,000 feet high.

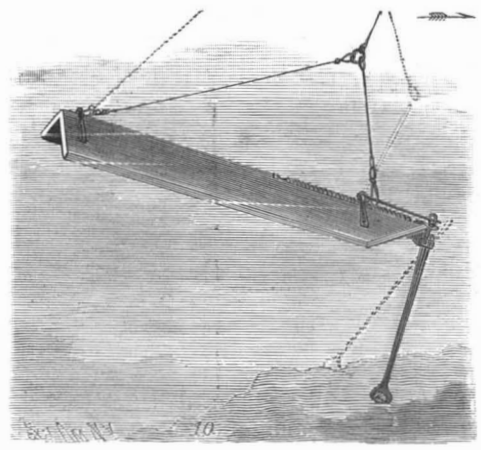

Fig. 6.—THE KITE.

He followed a canyon on the Colorado side fifteen miles with a similar result. At last we determined to take desperate chances. Taking all our provisions and outfit from the boat, we prepared to attempt to follow a faint bighorn trail for a few miles. Lieut. Potter and the rest of the party went on ahead, while I stayed with the boat. The plan was to turn the boat loose and let it shoot the rapids empty and unguided. Lieut. Potter and his party would attempt to catch it as it went by. I waited half a day, and in that time the lieutenant had reached the river three miles further on. Then I turned the boat loose, and in ten minutes it shot by them like a race horse. That left us but one alternative, to follow the bighorn trail. Taking provisions, a blanket each, and our firearms, we started on this perilous journey. Sometimes our path was 100 feet wide, sometimes for 100 feet we had scarcely six inches to cling to. In the latter situation our sensations were horrible. Over 1,000 feet below us yawned the black chasm; beneath us the rock was treacherous and slippery. It was always level, always the same dizzy height from the white, brawling stream below. For twenty-two miles we followed this dangerous trail. Then, with feelings of joy, we emerged upon the Hualapais Desert. We were three days in crossing this. We had plenty of water and provisions, but the men's shoes had given out and they suffered greatly from the hot sand and the cacti. On the third day we reached the Union Pacific Railroad and were taken up. We then proceeded to the Needles and completed the trip as originally contemplated without incident. We found that the river could not be navigated advantageously by any vessel drawing more than two or three feet of water without the expenditure of an immense sum of money."

The Under-running Trolley Patent.

Judge Townsend, of the United States Circuit Court at New Haven, Conn., on the 7th inst., rendered a decision in the suit of the Thomson-Houston Electric Company vs. the Winchester Avenue Railroad Company, declaring one of the Van Depoele under-running trolley patents in suit to be invalid and sustaining the other. These patents are controlled by the General Electric Company.

The patents upon which suit was brought are Nos. 495,383 and 495,443, both bearing date of April 11, 1893. The broad character of the patent No. 495,443 is illustrated by the 6th claim, which is as follows:

6. In an electric railway, the combination with a suitable track and a supply conductor suspended above the track of a car provided with a swinging arm carrying a contact device in its outer extremity and means for imparting upward pressure to the outer portion of the arm and contact, to hold the latter in continuous working relation with the under side of the supply conductor, substantially as described.

© 1895 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

STEAM ENGINE.—William F. and Eugene W. Cleveland, Rounthwaite, Manitoba, Canada. This is an engine of simple construction, designed to afford a higher than usual degree of efficiency by reducing to a minimum back pressure in the cylinder. It has a main and a supplementary exhaust pipe, the ends of the pipes being alongside each other, and the upper end of the main pipe extending above the upper end of the supplementary pipe, and creating suction over the latter, removing atmospheric pressure and securing a more prompt and perfect exhaust.

CONSTRUCTING SEWERS, SUBWAYS, ETC.—Harry P. McDonald, Louisville, Ky. This inventor provides an apparatus comprising a pair of telescopic shells, the rear one having an annular shoulder pressing against the line of the conduit, the sections being independently or simultaneously forced forward or in opposite directions. Means are provided for temporarily sheathing and applying a permanent cement lining, peculiarly arranged plunger or feed devices setting the sheathing and compressing the concrete as the sheathing and cutter carrying means are forced forward. A carrying mechanism is provided for removing the loose earth and bringing into position the concrete for lining.

GENERATING AND APPLYING VAPORS.—Oreon S. Rhodes, East Stroudsburg, Pa. This improvement is for the generation of vapors of volatile liquids and driving motors thereby, the boiler fluid being preferably a fixed oil boiling at a high temperature, giving great heat without corresponding pressure, and the vapor being generated from a volatile liquid combined with a soluble gas, a volatile liquid, or a liquefied gas. The boiler and engine form but one machine, both making use of the same boiler fluid, the construction being such that the fuel is utilized to the greatest advantage and the danger from explosion is reduced to a minimum.

Electrical.

ANTISPARKLE COMMUTATOR COMPOUND.—John R. Davis, New Iberia, La. To prevent sparkling at the commutator of a dynamo, this inventor provides, for application on the commutator, a compound containing a fatty substance mixed with a good conductor of electricity, the mixture being hardened by chalk. The compound is designed to reduce the wear of both the commutator and the brushes, while preserving a uniformly good contact, so as to obtain a steady flow of electricity.

Mechanical.

WRENCH.—Matthew C. Gay and Joseph Heard, Arcadia, Fla. According to this improvement a fixed head and hinged jaw are detachably connected, so jaws for pipes or for nuts may be interchangeably used, the connection being so effected that the pivot portions of the hinged jaw are guided and slip longitudinally into their seats, moving with such seats in the tilting movements of the jaw. In one tool is thus afforded a pipe wrench and a nut wrench, the device being also simple, inexpensive and durable.

TACK MACHINE.—Russell Hathaway, Elbridge G. Paull, and Cyrus D. Hunt, Fairhaven, Mass. This machine has two cams operating two levers carrying the leader and lazy knives, the cams actuating the leader knife and maintaining the lazy knife up and still while the edge of the plate is turning down, the improvements consisting principally in the form of the lazy cam, the form of the gripping cam, and the centering of the gripping lever. The machine is designed to be run at a high speed with good feeding of the plate, the following of its cam by the gripping lever, and diminution of the wear of the leader knife.

Agricultural.

SICKLE BAR.—James Smith, Granite Canon, Wyoming. This invention provides for a construction of the cutter or sickle bar to materially lighten the draught in mowing grass and harvesting grain, the bar being so made that it may be used for trimming edges as well as for cutting grass. The bar has a series of overlapping disk cutters and means for rotating adjacent cutters in opposite directions and reversing the direction of rotation, each of the alternate cutters being adapted to co-operate with either of the cutters between which it is located.

PLANTER.—John W. Shore, Angola, Ind. This machine is adapted to plant two kinds of seed alternately if desired, the seed being delivered to a chute to conduct it to the ground, and the planting being uniform as to distances apart and the number of seeds or grains delivered at a time. The shoe carrying the chute makes the furrow and covers the seed, and also allows for the vertical adjustment of the chute, springs holding the shoe in yielding contact with the ground.

STAKE FOR PLANTS, FLOWERS OR TREES.—Theron N. Parker, Quick, Iowa. This is an improvement in devices for tagging plants, trees, etc., by florists, nurserymen and others. This stake has a number of wire legs whose upper ends are twisted together, one of the lengths of wire extending up above the others and being bent at its upper end to encircle the stalk of the plant. A sheet metal tag is attached by wire to the top bend.

Miscellaneous.

PHOTO-MECHANICAL PRINTING.—Edouard G. D. Deville, Ottawa, Canada. To change the continuous tones of an original into tones formed of black and white dots by a screen placed in front of the photographic plate, this inventor has devised a new kind of screen, furnished with alternate opaque and transparent squares, disposed like the squares of a chess board.

ADJUSTING BEAT OF CLOCK PENDULUMS.—Fred. F. Richey, Topeka, Kansas. This is a leveling attachment for a clock mechanism controlling the pendulum and verge to such an extent that it will act properly even though the clock should be considerably out of plumb. The device consists of a weighted swinging frame of a novel character arranged to carry the verge, and is applicable to any form of clock mechanism. It is simple, durable, and inexpensive.

VACUUM PAN.—Alphonse F. Gaiennie, La Fourche, La. This invention provides an improved separator for use on evaporators to save liquid carried by the vapors, and for use in separating oil and grease from exhaust steam. The improvement consists principally in the placing of one or more cone-shaped plates in the path of the vapors, within a suitable casing, there being a receiving receptacle at the lower edge of each plate into which pass the liquids separated from the vaporsstriking the plates, such liquids being returned to the mass boiling in the evaporator.

CHOCOLATE DIPPERS.—Cyprien Gousset, New York City. Two patents have been granted this inventor, one of which is for an appliance for dipping stick chocolate and other elongated forms of candy. It comprises a frame with cross wires formed into loops and transverse brace wires, forming a simple and inexpensive device which may be made to fit odd shapes and hold the sticks so that they may be readily dipped into a chocolate solution, the device holding a comparatively large quantity of candy. In the other dipper, comprising a frame with cross wires and series of rings, provision is made for securing and dipping a large quantity of creams at a time, the creams being so held that practically their entire surface is exposed while being dipped.

CLAMP FILING DEVICE.—Edward W. Farnham, Chicago, Ill. (C., B. & Q. R.R.) This is a file holder and binder in which the files are stacked on a tray provided with cord clamping devices, there being an independent cover with cord for winding around the holder, and one of the ends of the cord being removably secured in the clamping devices, which, with the cord, furnish a guide to retain the files in place. The device is a very simple and inexpensive one to facilitate compact and secure filing, and large orders for it have been placed by the railroad offices in Chicago.

MATTRESS HOLDER FOR BEDS.—Elizabeth Calkins, St. Joseph, Mo. For holding the bedding, etc., in place, in folding beds when they are turned up, this inventor provides a simple and inexpensive construction, applicable to beds of all kinds and readily adjustable for different thicknesses of bedding. The holder is attached to the bed rail, and has jaws which engage the upper and lower sides of the bedding. The holder consists of two sections, one having a leg engaged by a pivoted notched locking plate on the other section, to hold the sections adjustably locked.

SCIENTIFIC AMERICAN

BUILDING EDITION.

DECEMBER, 1895.—(No. 122.)

TABLE OF CONTENTS.

1. Elegant plate in colors showing a residence in the Colonial style recently erected at East Orange, N. J., at a cost complete of $11,000. Three perspective elevations and floor plans, also an interior view. An excellent design well treated. S. W. Whittemore, architect, East Orange, N. J.
2. A Colonial house at Madison, N. J. Perspective elevation and floor plans. Cost complete $5,500. Architects, Messrs. Child & De Goll, New York City.
3. A Colonial dwelling at Montclair, N. J. Two perspective elevations and floor plans. Architect, W. E. Bloodgood, New York City. A unique design.
4. Two perspective elevations and floor plans of a house recently erected at Brick Church, N. J., at a cost of $2,700 complete. A pleasing design. Architect, Mr. F. R. Hassman, Orange, N. J.
5. View of the new City Hall, Philadelphia, which has been erected at a cost of over $20,000,000. The building is of white marble and covers four and a half acres. Is absolutely fireproof. The height of this building is 547 feet 3½ inches, being, with two exceptions, the highest building on the earth. The exceptions being the Washington Monument and the Eiffel Tower. The next highest building on earth is the Cologne Cathedral, which is 510 feet.
6. View of the facade of the magnificent new Boston Public Library, Boston. Architects, Messrs. McKim, Mead & White, New York City.
7. Residence at Bensonhurst-by-the-Sea, L. I. Two perspective elevations and floor plans. Cost complete, $8,500. Architect, S. S. Covert, New York City.
8. Perspective elevations and floor plans of a cottage at Oakwood, S. I., recently erected at a cost of $2,800 complete. An attractive design.
9. Miscellaneous Contents: Testing house pipes and drains.—A combination bathtub and washstand, illustrated.—The permanence of modern dwellings and public works.—An improved steam and hot water heater, illustrated.—Moving a large factory.—How to fix paper on drawing boards.—A quick water heater, illustrated.—Improved toilet room fixtures, illustrated.—A single track parlor door hanger, illustrated.—An improved furnace grate, illustrated.—Cements in mason work.—An improved furnace, illustrated.—A regenerative gas heater, illustrated.—Improved woodworking machinery, illustrated.

The Scientific American Building Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates and fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural Publication in the world. Sold by all newsdealers. MUNN & CO., PUBLISHERS, 361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion: about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

Marine Iron Works. Chicago. Catalogue free.

"U. S." metal polish. Indianapolis. Samples free.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Dynamo castings. The E. M. Wks., Ronceverte, W. Va.

Handle & Spoke Mchy. Ober Lathe Co., Chagrin Falls, O.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Use the Hough Security Cash Recorder. Entirely different from a Cash Register. Hough Cash Recorder Co., South Butler, N. Y.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

☞Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(6682) I. J. C. asks for a formula for giving a platinum finish on copper. A. The appearance of platinum may be given to copper by immersion in a bath composed of 1¾ pints hydrochloric acid, 7½ ounces arsenic acid, and 1¼ ounces acetate of copper. The article must be cleaned before immersion, and left in the bath till it has the color of platinum.

(6683) A. W. F. asks how to make lye on a small scale. A. Hickory ashes are the best for making common washing soft soap (when it is not desirable to use the potash lye), but those from sound beech, maple, or almost any kind of hard wood except oak, will answer well. A common barrel set upon an inclined platform makes a very good leach, but one made of boards set in a trough in V shape is to be preferred, for the strength of the ashes is better obtained, and it may be taken to pieces when not in use and laid up. First, in the bottom of the leach put a few sticks; over them spread a piece of carpet or woolen cloth, which is much better than straw; put on a few inches of ashes and from 4 to 8 qt. lime; fill with ashes, moistened, and tamp down well—tamp the firmest in the center. It is difficult to obtain the full strength of ashes in a barrel without removing them after a day's leaching, and mixing them up and replacing. The top should be first thrown off and new ashes added to make up the proper quantity. Use boiling water for second leaching. This lye should be sufficiently strong to float a potato.

(6684) T. O'B. says: Can you give me a quick process for making vinegar? A. In this process dilute alcoholic liquor, to which one thousandth part of honey or extract of malt has been added, is caused to trickle down through a mass of beechwood shavings previously steeped in vinegar and contained in a vessel called a vinegar generator. It may consist of a large oak hogshead or barrel furnished with a loose lid or cover, a few inches below which is fitted a perforated shelf, having a number of small holes loosely filled with packthread about six inches long, knotted at the upper end to prevent their falling through. Several small glass tubes, long enough to project slightly above and below the shelf, are also fitted in perforations in the shelf to serve as air vents. The vessel at the lower part is pierced with eight or ten holes equally distributed around the sides at about 6 inches above the bottom to admit of the entrance of air. A small siphon tube, the upper curve of which is an inch below the air holes, serves to carry off the liquid as fast as it accumulates at the bottom. The alcoholic liquid, at a temperature of 75 degrees to 83 degrees Fah., is run in on the shelf and slowly trickles down through the holes by means of the packthread, diffuses itself over the shavings, slowly collects at the bottom, and runs off by the siphon exit. The air enters by the lower holes, passes freely through the shavings, and escapes by the glass tubes. The temperature within the apparatus soon rises to about 100 degrees Fah., and remains stationary at this point, while the action goes on favorably. The liquid generally requires to be passed three or four times through the cask before its acetification is complete.

(6685) J. B. asks: How much more power, if any, would be required to propel a bicycle (safety) one mile, having a front sprocket wheel of 5½ inches in diameter, 18 teeth, and with a rear sprocket wheel of 2½ inches in diameter, 9 teeth, than one having both the front and rear sprocket wheels 5½ inches in diameter, with 18 teeth each; large wheels, 28 inches in diameter, equal conditions prevailing, excepting as to time required? A. As power is derived from both pressure and velocity, the condition named in the relative sizes of the wheels will make no difference in the actual power required to drive the bicycle. The large wheel sprocket must run faster, and with it the feet must make more treads with lighter pressure for a given distance, than in the ordinary form as first named. The only value of the last named combination is on steep, rising grades.

TO INVENTORS.

An experience of nearly fifty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

December 17, 1895,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Air brake, T. J. Hogan	551,440
Air compressor, hydraulic, A. Kalthoff	551,549
Antirattler and thill support, combined, D. F. Taylor	551,699
Ax die machine, P. Maher	551,392
Axle box for railway or like vehicles, Ladds & Selby	551,443
Axle, car, S. L. Denney	551,746
Axle lubricator, car, A. Brauer	551,360
Bag holder, G. F. Johnson	551,639
Ballot box, registering, W. F. Gaul	551,726
Band cutter and feeder, N. Cornish	551,432
Band cutter and feeder, F. F. Landis	551,501
Barbing apparatus, M. Biermann	551,573
Batteries, renovating storage, J. Trowbridge	551,565
Battery. See Stamp battery.	
Bedstead, folding, M. E. Van Osdel	551,566
Belt and pocketbook, combined, R. Michael	551,553
Belt replacer, D. Brion, Jr.	551,486
Belt shifter, F. N. Connet	551,365
Bicycle, W. C. Dunn	551,667
Bicycle, W. J. Pine	551,401
Bicycle crank and pedal shield, R. Nicol, Jr.	551,597
Bicycle lamp bracket, J. E. Bean	551,570
Bicycle saddle, W. Rundquist	551,478
Billet iron, H. H. Baker, Jr.	551,484
Binder, temporary, A. Neilson	551,397
Block. See Building block. Pulley block.	
Boat, F. H. Church	551,303
Boiler. See Steam boiler.	
Boiler, A. S. Krotz	551,589
Boiler, L. Saunders	551,652
Boiler fire box, E. Ingleton	551,748
Boilers, dry pan for steam, E. D. Meier	551,681
Boilers, hand pole plate for steam, Myrick & Doeg	551,596
Boilers, pipes, etc., block covering for steam, G. Dickson	551,309
Bolt cutter, J. S. Murphy	551,686
Bolt dogging device, automatic, E. Stockwell	551,697
Bottle drip cup, J. M. Howard	551,547
Bottle, mucilage, E. G. Bouton	551,524
Bottle, non-refillable, H. J. Breeze	551,576
Bottle stopper, W. B. Stevens	551,413
Bottle stopper, L. E. Wheeler	551,424
Box. See Ballot box.	
Bracket. See Bicycle lamp bracket.	
Brake. See Air brake. Wagon brake. Car brake.	
Brake staff handle, W. C. & J. T. Van Dillen	551,418
Brick or tile cutting machine, Penfield & Wallace	551,690
Brush, foot, J. Mellor	551,552
Buckle, slide, Smith & Buchanan	551,605
Buckle, suspender, J. F. Molloy	551,595
Buffer, adjustable, J. E. Baker	551,742
Building block, artificial, H. R. Knoch	551,588
Burner. See Gas burner. Stove burner.	
Button, link, E. B. Aiguier	551,568
Cable hanger, S. S. Leonard	551,504
Cable tension, automatic, W. F. Brothers	551,744
Cable track, suspension, W. J. Brewer	551,525
Calcium carbide producing, W. C. Clarke	551,461
Calculating machine for weights and values, Yeamans & Abbott	551,520
Calendar, T. H. Hovenden	551,638
Calipers, micrometer, F. E. Lake	551,591
Car brake and fender, combined, J. C. Walier	551,700
Car coupling, J. H. Senger	551,693
Car coupling, A. Silbermann	551,479
Car coupling, H. G. Wesemann	551,517
Car door, H. C. Hatcher	551,439
Car door fastening, G. E. De Witt	551,568
Car fender, J. Grant	551,585
Car fender, J. A. Wolfram	551,702
Car fender, G. H. Zane	551,521
Car fender, street, W. J. Hinphy	551,380
Car propelled by gas motor engines, H. P. Holt	551,637
Car signal, E. Nelson	551,398
Car, sleeping, F. Anderson	551,705
Car, street railway, W. R. Dodson	551,621
Cars, transmission of electricity to moving, T. Nesom	551,734
Carbon dioxide, process of and apparatus for making, J. H. C. Behnke	551,485
Card punching machine, J. A. Groebli	551,544
Card setting machine, S. & E. Beaumont	551,517
Carpet stretcher, J. W. Snell, Jr.	551,411
Carriage wheel, J. E. Warner	551,516
Carrier. See Hay carrier.	
Cartridge, blasting, P. A. Oliver	551,600
Cash register, G. W. Grove	551,631
Cash register and indicator, P. Yoe	551,663
Cash registers, irregular number indicating device for, L. F. Brous	551,665
Catalogues, lock rod for card, D. E. Hunter	551,730
Cement kiln, F. M. Lande	551,390
Centrifugal apparatus, E. G. N. Salenius	551,511
Chair spider attachment, G. A. & E. G. Watkins	551,701
Check, conductor's excess, E. M. Tacy	551,417
Chuck, lathe, L. E. Whiton	551,425, 551,426
Churn, N. Packard	551,568
Churn, M. N. Ward	551,422
Churn, centrifugal, R. E. Evenden	551,668
Clamp. See Universal clamp.	
Cleaner. See Dish cleaner. Knife cleaner.	
Clippers, hair, G. H. Coates	551,617
Clipping machines, lubricating attachment for animal, J. W. Chandler	551,720
Clock, calendar, A. E. McCollum	551,556
Clock, electric programme, F. Frick	551,372
Closet bowl, H. Gill	551,584
Clutch, variable speed power, W. W. Beaumont	551,571
Coal, means for discharging, M. J. Paul	551,509
Cock, blow-off, D. B. Donnelly	551,370
Cock for vessels, sea, P. T. Perkins	551,473
Cock rod supporter, stop, W. Holt	551,729
Cops, apparatus for pressing and packing, S. W. Wardwell, Jr.	551,482
Corset fastening, E. Roderstein	551,559
Corsets, lacing cord fastener or detainer for, M. R. Barker	551,356
Cotton press, F. A. Savile	551,452
Counter fixture, Walker & Baum	551,459
Coupling. See Car coupling. Pipe coupling.	
Crab trap, D. H. Hibbert	551,468
Crane, hoisting and traveling cable, W. F. Brothers	551,613
Crane with gravity anchor, cable, W. F. Brothers	551,614
Crusher. See Ore crusher.	
Cultivator, C. E. Booi	551,574
Current protector, strong, A. L. Joynes	551,388
Curtain stretcher frame, G. A. Ward	551,423
Cutter. See Band cutter. Bolt cutter.	
Decorticating machine, Buist & Schmidt	551,526
Dental furnace, vapor, B. Rein	551,650
Detonator, E. O. Wood	551,519
Die, F. P. Davidson	551,529
Dike, portable, J. W. King	551,641
Dish cleaner, H. D. Haggard	551,377
Disinfecting device, automatic, Taussig & Sheridan	551,564
Display hook, W. J. Pitkin	551,736
Dolls, etc., composition for hands and feet for, G. Doebrich	551,530
Door check, T. Barnes	551,569
Dough mixing and kneading machine, J. R. Phelps	551,447
Dowel setting machine, H. C. Doman	551,531
Drill. See Percussion drill.	
Drying apron and drum cylinder for same, H. W. Church	551,460
Electric light, D. Miseli	551,394
Electric lighter, Rider & Hencken	551,451
Electric lock, P. & J. A. Meyer	551,682
Electric machine, dynamo, Blackburn & Buchanan	551,712
Electric meter, T. Duncan	551,436

© 1895 SCIENTIFIC AMERICAN, INC.

Electric motor, F. E. Herdman 551,633
Electric motor, Wightman & Urban 551,567
Electric motors, controlling, D. Mason 551,470
Electric motors, means for operating and regulating speed of, R. Eickemeyer 551,371
Electrical circuits, system for regulating effective tension of, H. O. W. J. Breul 551,743
Elevator, J. T. Cowley 551,620
Elevator, T. W. Heermans 551,545
Elevator mechanism, L. Christiansen 551,488
End gate fastener, A. Schlapbach 551,653
Engine. See Gas engine. Steam engine. Stone cutting engine.
Engine, F. R. Cornwall 551,366
Engine steering gear, traction, F. F. Landis 551,493
Envelope fastener, W. Barnard 551,709
Evaporator, H. A. Merriam 551,732
Exciter or machine, J. A. Gray 551,672
Eyelets, manufacture of, A. Mathison 551,593
Farm gate, J. Sweet 551,415
Fastening device for boxes, card cases, etc., C. H. Reed 551,477
Feedwater regulator, automatic, J. E. Chafer 551,719
Fence post, metallic, Ellis & Helfenberger 551,583
Fender. See Car fender.
Filter, water, I. T. Hopper 551,381
Firearm, box magazine, T. G. Bennett 551,572
Firearm, box magazine, W. Mason 551,592
Firearm, magazine, W. Mason 551,393
Fireplace heater for radiator systems, C. M. Robinson 551,651
Fireplace, portable, W. E. Fitch 551,539
Fishhook, E. H. Crane 551,581, 551,582
Fishing reel, H. W. Martin 551,550
Fishing reel, G. H. Newell 551,645
Flushing cistern, J. & W. J. Sherman 551,514
Fork. See Lifting fork.
Frame. See Curtain stretcher frame. Picture frame.
Fruit gatherer, Coulson & Reus 551,580
Furnace. See Dental furnace. Ore smelting furnace. Oxidizing furnace.
Furnace, E. Powell 551,476
Furnace grate, S. Mann 551,505
Furnaces, protecting shield for heating, smelting, or other, A. Younger 551,704
Gage. See Track gage.
Gas burner, self-generating, H. F. Smith 551,656
Gas condenser, W. L. Church 551,721
Gas engine, F. W. Coen 551,579
Gas generator, Henderson & Stapp 551,546
Gas, method of and apparatus for scrubbing, F. L. Slocum 551,695
Gas washer and scrubber, F. L. Slocum 551,694
Gate. See Farm gate. Railway crossing gate.
Gate, C. H. Brunk 551,487
Gate, S. B. Sutton 551,739
Generator. See Gas generator. Steam generator.
Gloves, etc., receptacle for, A. E. G. Schmidt 551,692
Grain separator, centrifugal, F. F. Landis ..... 551,492, 551,494 to 551,499
Grate, fire, J. C. Birkhead 551,711
Grinding mill, C. R. Hudson 551,382
Guard lock, F. W. Mix 551,685
Halter, H. L. & C. M. Green 551,375
Hame hook, S. H. Windley 551,661
Hand rake, J. Murphy 551,507
Harness, L. T. Grubbs 551,376
Harrow, corn, A. Downing 551,435
Harrow, spading, W. P. Morgan 551,395
Harvester and shocker, corn, W. Milbrath 551,446
Harvester, corn, C. H. Hall 551,727
Hay carrier, J. G. & J. A. Piron 551,474
Heat regulator, W. W. Wilcox 551,427
Heater. See Fireplace heater.
Heater, L. S. Daniels 551,528
Hoisting and conveying apparatus, T. S. Miller 551,506
Hone, composition metal, C. E. Greene 551,673
Hook. See Display hook. Fish hook. Hame hook.
Hop tearing apparatus, G. L. Jaeger 551,677
Horseshoe, cushioned, H. H. Gibbs 551,670
Horseshoe, nailless, H. D. Shaiffer 551,407
Hub, vehicle, H. L. Stuart 551,414
Ice carrying device, W. Schildhauer 551,512
Indicator. See Station indicator.
Irrigation, means for, E. Newsom 551,646
Jack. See Stitching jack.
Jacquard apparatus, R. C. Richardson 551,510
Kiln. See Cement kiln.
Kitchen cabinet, W. Swenson 551,606
Kneading machine, dough, D. W. Bromley 551,714
Knife cleaner, H. A. H. Guhl 551,438
Knitting machine narrowing apparatus, F. H. Granz 551,629
Labeling plants, etc., appliance for, F. R. & C. J. Chapman 551,578
Ladder or other supporting device, step, H. Liefer 551,445
Lamp, forced draught, R. Hitchcock 551,723
Lamp holder, magnetic electric, M. H. Collom 551,364
Lamp, incandescent electric, C. A. Beal 551,357
Latch, W. O. Hogaboom 551,490
Lead by electrolysis, apparatus for manufacturing white, Browne & Chaplin 551,361
Lens grinder, Buchhop & Schnackenberg 551,717
Lifting fork, E. A. Cozens 551,433
Light. See Electric light.
Liquid dispensing apparatus, W. M. Fowler, 551,540, 551,541
Lock. See Electric lock. Guard lock.
Lock, J. A. Hampel 551,632
Lock, F. W. Mix 551,684
Loom pile wire, G. Seeschneider 551,654
Loom shuttle, A. Isherwood 551,383
Loom shuttle tension device, W. A. Grant 551,628
Lubricator. See Axle lubricator.
Lubricator, H. R. Andrews 551,522
Mail bag stand, A. S. Hill 551,379
Mat, T. C. McPherson 551,644
Match machinery, B. T. Steber 551,562
Matrix for guiding pieces when being punched, C. G. Larson 551,503
Matrix making and typesetting machine, Lee & Lebrun 551,469
Metal rods, machine for treating, J. Doughty 551,532
Meter. See Electric meter.
Mill. See Grinding mill. Windmill.
Millstone dressing machine, B. F. Strickler 551,563
Mining drills and reamers, dust arrester for, R. H. Elliott 551,464, 551,465
Mining machine, E. S. McKinlay 551,508
Mole and rat trap, combined, G. W. Stephens 551,412
Mop head and wringer, combined, H. J. Gleason 551,625
Mop wringer, W. G. Archer 551,355
Motor. See Electric motor.
Motors and regulation of currents in same, mechanism for admission of currents to, F. E. Herdman 551,635
Motors, mechanism for admission and regulation of currents to, F. E. Herdman 551,634
Musical instruments, bridge for stringed, A. Renner, Jr. 551,450
Nozzle, faucet, F. Keiser 551,731
Nozzle, hydraulic, F. M. Bookwalter 551,575
Nozzle, ram jet, W. F. Cunningham 551,527
Nozzle, spraying, F. Gray 551,630
Nut lock, L. O. Smith 551,737
Ore crusher, A. H. Schlerholz 551,560
Ore smelting furnace, H. P. Holland 551,441
Overshoe fastener, W. S. Richardson 551,406
Oxidizing furnace, J. E. Greenawalt 551,725
Paper bags, manufacturing, D. Appel 551,611
Paper feeding machine, E. Dummer 551,724
Paper folding machine, J. W. Skillen 551,561
Paper sheets, machine for feeding and registering, E. Dummer 551,747
Paper twine, machine for making, G. L. Brownell 551,615
Pencil sharpener, A. Prader 551,402
Percussion drill, A. E. W. Meissner 551,594
Picture frame, C. F. Herbert 551,676
Pillow sham holder, F. L. Smith 551,657
Pipe coupling, L. Mullenhoff 551,733
Pipe wrench, C. P. Payne 551,689
Pipe wrench, chain, J. H. Newell 551,399
Pipes, machine for cutting out lead joints in, J. H. McConnell 551,557
Planter and fertilizer distributer, H. M. Smith 551,454
Plate bending machine, W. Spalckhaver 551,455
Pliers, Edmunds & Cooper 551,748
Pneumatic dispatch tube system, A. W. Pearsall 551,602
Pneumatic dispatch tube systems, valve for, A. B. Campbell 551,616
Pneumatic dispatch tube systems, valve for, A. W. Pearsall 551,601
Pocket, garment, J. M. Appelbaum 551,429
Post. See Metallic post.
Potato hiller, E. C. Schwingel 551,513
Powder and shot charger, W. N. Beardsley 551,710
Power, apparatus for obtaining motive, Fellows & Whitham 551,669
Precious metals, electrolytic process of obtaining, Pelatan & Clerici 551,648
Press. See Cotton press.
Printing machines, sheet gage for, S. Whitlock 551,607
Printing plate holder, E. D. Tucker 551,457
Propeller wheel, E. J. Parker 551,647
Pulley block, H. Orrock 551,735
Pump, steam vacuum, E. I. Nichols 551,400
Purse and card case, combined lady's, F. F. Braillard 551,359
Pyroxylin compound, J. H. Stevens 551,456
Radiator, J. B. Fox 551,489
Railway crossing gate, F. A. Curtis 551,722
Railway, electric, R. M. Hunter 551,587
Railway motor shield, electric, Baker & McLain 551,664
Railway rail and connection, J. Neafie 551,688
Railway rail, compound, Charles & King 551,362
Railway system, closed conduit, F. C. Esmond 551,535
Railway system, closed conduit electric, F. C. Esmond 551,534, 551,536
Railway tie, metallic, O. R. Saint 551,691
Railway tracks, construction of, W. Raymond 551,649
Railways, closed conduit system for electric, F. C. Esmond 551,537
Rake. See Hand rake.
Reel. See Fishing reel.
Register. See Cash register.
Regulator. See Feedwater regulator. Heat regulator.
Rethrasher and elevator for tailings, F. F. Landis 551,500
Ribbon holder, W. Straw 551,738
Rubber articles, process of and machine for making hollow soft, H. G. Wolcott 551,741
Ruling device, multiple, B. H. Toquet 551,659
Safe door, H. C. Stockwell 551,696
Salt shaker, H. F. Gray 551,374
Sash holder, W. L. Bellinger 551,430
Sash holder, W. E. Dowling 551,666
Saw, E. Viewegh 551,458
Saw filing machine, J. C. Ballew 551,708
Saw, folding log, A. R. Shaw 551,409
Sawmill appliance, Hinkley & Fitzgerald 551,636
Saw teeth, implement for dressing sides of, H. C. Burnett 551,718
Scaffold, extension, A. Doolittle 551,434
Scissors for splicing purposes, J. A. Myers 551,555
Screen operating mechanism, window, F. S. Leary 551,643
Separator. See Grain separator.
Sewer or water closet plunger, P. F. O'Conner 551,598
Sewing machine table, G. L. Gray 551,671
Signal. See Car signal.
Signal, T. E. Ward 551,660
Skate ankle brace, J. C. Lee 551,444
Sleigh runner attachment, W. H. Millspaugh 551,554
Soap, making, E. J. T. Digby 551,723
Soldering machine, M. Jensen 551,491
Spinning machine yarn separator, A. D. Chandler 551,431
Stair rod, A. W. Findlay 551,437
Stamp battery, C. Raleigh 551,448, 551,449
Stamp holder and ink pad, combined, J. H. Kleine 551,642
Station indicator, C. E. Larrabee 551,502
Steam boiler, A. S. Krotz 551,590
Steam boiler, C. W. Wagner 551,419
Steam engine, E. A. Sperry 551,480
Steam generator, water tube, E. D. Meier 551,680
Stitching jack, A. R. Knadler 551,389
Stone cutting engine, W. B. Murray 551,687
Stop motion mechanism, self-registering, H. F. Straw 551,698
Stopper. See Bottle stopper.
Store service apparatus, J. T. Cowley 551,618, 551,619
Store service apparatus, J. H. Goodfellow 551,626, 551,627
Store service apparatus, adjustable curve for, Gayton & Cowley 551,624
Stove burner, gas, I. Brooke 551,715
Stove, heating, I. Brooke 551,716
Stove, heating, F. Kaempen, Jr. 551,640
Stove, laundry, W. I. Gong 551,373
Stove, oil, Gallagher & Adler 551,466
Stoves, ranges, etc., grate for, C. P. White 551,518
Sugar for confectionery, preparing, E. Shaw 551,655
Switch working mechanism, R. W. Farrell 551,538
Tablet, manifolding autographic, W. Assheton 551,706, 551,707
Tank. See Water tank.
Telephone exchange system, automatic, W. F. Lounsbury 551,391
Telephone receiver holder, F. W. Martland 551,551
Telephone transmitter, T. Grissinger 551,674
Teletyper, C. Spiro 551,515
Threshing machine, P. E. Good 551,542
Thrashing machine separator attachment, C. E. Maggard 551,679
Tire, bicycle, O'Neill & Haile 551,471
Tire, bicycle, A. B. Shaw 551,408
Tire for bicycles, pneumatic, F. Douglas 551,533
Tire tightener, W. S. Hale 551,675
Tire, vehicle, C. J. Wagener 551,481
Tool holder, C. L. Alexander 551,610
Track gage, Donovan & Behan 551,622
Tramway for hoisting and dumping apparatus, Bruce & Marcus 551,745
Transplanter, J. Walter 551,421
Trap. See Crab trap. Mole and rat trap.
Trolley wagon, G. H. Hulett 551,586
Trousers stretcher, A. Taeschner, Jr. 551,658
Truck, J. K. Proctor 551,403
Truck frame plate, car, B. Bagshawe 551,523
Truck, railway car, R. F. Minor 551,683
Type-containing channel, Johnson & Low 551,386
Type holder, Johnson & Low 551,387
Typesetting apparatus, Johnson & Low 551,384, 551,385
Typewriting machine, W. P. Quentell 551,404
Typewriting machines, cushion for keys for, Graham & Savell 551,543
Undergarment, H. L. Shaver 551,604
Universal clamp, A. O. Benecke 551,358
Valve, engineer's brake, G. W. Hayden 551,378
Valve, float, J. W. Chamberlain 551,577
Valve, flushing, E. L. Powell 551,475
Valve system, air brake, H. Tabor 551,416
Vehicle body, M. Woodhull 551,703
Vehicles, traction mechanism for self propelling, C. W. Parks 551,472
Velocipede, ice, F. J. Korff 551,442
Velocipede, marine, G. F. Cremer 551,367
Velocipede, railway, J. Donovan 551,623
Ventilator, C. Seewald 551,603
Ventilator, L. Silberman 551,453
Vessels, stern frame and rudder for, J. R. Oldham 551,599
Veterinary mouth speculum, H. F. Condon 551,462
Vise or cramp for holding bits or other parts of harness while being cleaned, G. Wilson 551,483
Wagon brake, D. A. Williams 551,608
Wagon, coal, J. E. Walsh 551,420
Wagon seat attachment, Uncapher & Deplanty 551,740
Water tank, antifreezing, H. F. Winkelmann 551,662
Wheel. See Carriage wheel. Propeller wheel.
Wheel, C. H. Wilmerding 551,609
Wheel rim, vehicle, G. E. Blake 551,713
Windmill, F. P. Shepard 551,410
Window bead fastener, A. P. Read 551,405
Wire stretcher, H. A. King 551,678
Wool, extracting fat from, P. C. McIlhiney 551,396
Wrapping machine, newspaper, L. C. Crowell 551,463
Wrench. See Pipe wrench.
Wrench, O. H. Hanson 551,467
Wringer. See Mop wringer.
Writings or drawings, apparatus for making reproductions of, J. Wilson 551,428

DESIGNS.

Bicycle saddle, C. D. Cutting 24,988
Box, wooden, W. C. Estes 24,991
Brushes, etc., back for, P. O. Dickinson 24,981, 24,982
Carpet, C. Casseneuve 24,993
Dish, covered, A. A. Lanternier 24,984
Egg cup, W. S. Farrington 24,983
Flag, F. C. Bliss 24,992
Game board, W. B. Smedley 24,987
Kite, F. Blauss 24,989
Picture frame, C. B. Barker 24,986
Statuette, L. Hornberger 24,985
Steamers, casing for face, C. A. Butler 24,990

TRADE MARKS.

Antiseptic for internal and external use, F. von Heyden Nachfolger 27,482
Cakes, crackers, and the like, Crosier-Stauffer Company 27,477
Coal, derivatives of, Gas Light and Coke Company 27,480
Flannels, B. W. Titus' Sons 27,496
Flour, wheat, Charles Tiedemann Milling Company 27,478
Gin, S. Streit & Company 27,476
Leather, tanned, Frank Tanning Company 27,487
Medical remedies, certain named, L. W. Pigott 27,484
Medicines for gout, sciatica, rheumatism, and kindred diseases, Rheumatox Company 27,483
Packing for steam joints, gaskets, and the like, sheet, C. L. Ireson 27,488
Papers, fine writing, Hampshire Paper Company 27,475
Plows and cultivators, Heilman Plow Company 27,491
Preparations for blemishes and diseases of the skin and scalp, and nasal, throat and lung troubles, M. Tolquet 27,481
Roofing felt, Mica Roofing Company 27,489
Soap, A. W. Stadler 27,479
Starchers, shirt, collar, and cuff, Weldon & Stites 27,485
Wringers and mangles, American Wringer Company 27,490

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

WOOD or METAL WORKERS without steam power can save *time* and *money* by using our Foot and Hand Power Machinery
SEND FOR CATALOGUES—
A—Wood-working Machinery.
B—Lathes, etc.
SENECA FALLS MFG. COMPANY,
695 Water St., Seneca Falls, N. Y.

AMERICAN PATENTS.—AN INTERESTING and valuable table showing the number of patents granted for the various subjects upon which petitions have been filed from the beginning down to December 31, 1894. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1002. Price 10 cents. To be had at this office and from all newsdealers.

POWER & FOOT LATHES. SHAPERS, PLANERS, DRILLS, MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. CATALOGUE FREE.
SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Scientific Book Catalogue
RECENTLY PUBLISHED.
Our New Catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.
MUNN & CO., *Publishers* SCIENTIFIC AMERICAN,
361 Broadway, New York.



VANDUZEN STEAM JET PUMP
THE BEST IN THE WORLD.
Pumps Any Kind of Liquid.
Always in Order, never Clogs nor freezes. Every Pump Guaranteed.
10 SIZES.
200 to 12000 Gallons per Hour. Cost $7 to $75 each. Address
THE E. W. VANDUZEN CO.,
102 to 108 E. Second St., Cincinnati, O.

THE MODERN ICE YACHT.—BY Geo. W. Polk. A new and valuable paper, containing full, practical directions and specifications for the construction of the fastest and best kinds of Ice Yachts of the latest, most approved forms. Illustrated with engravings drawn to scale, showing the form, position, and arrangement of all the parts. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 624. Price 10 cents. To be had at this office and of all newsdealers.

DO YOUR OWN PRINTING
$5. PRESS for cards, circulars, &c
Press for printing a small paper, $40.
Save money! Make money printing for others! Type-setting easy. Printed rules. Write for catalogue, presses, type, cards, etc., to factory.
KELSEY & CO.
Meriden, Conn.

The Curtis Balanced Steam Trap
Combines more Superior Features than any other Trap in the market.
☞ *Send for circular S. C. giving particulars.*
D'ESTE & SEELEY CO.
29-33 Haverhill St.,
BOSTON.



STARRETT'S IMPROVED SPEED INDICATOR.

Price $1.50. With Split Cap, $1.75.
Graduations show every revolution, and with two rows of figures, read both right and left as the shaft may run. Auxiliary split cap is made to slip over the pointed spindle to use on a center or pointed shaft.
☞ *Illustrated Catalogue Free.*
The L. S. Starrett Co., Manufacturer of Fine Tools, P. O. Box 13, ATHOL, MASS.

LITTLE GIANT BOLT CUTTERS and NUT TAPPERS.



Complete with Tap Chuck, Taps, Dies, and Collets. Cutting 9 sizes, from ¼ to 1 inch. Has improved clutch on spindle for running die off after thread is cut, making quick return.
☞ *Send for fully illustrated catalogue.*
WELLS BROS. & CO., P. O. Box B, Greenfield, Mass.

VELOCITY OF ICE BOATS. A COLlection of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 214. Price 10 cents. To be had at this office and from all newsdealers.

ON TOP AGAIN!
At a recent test by the Solvay Process Co. of Syracuse, N. Y., of eleven different pipe coverings,
OUR COVERING
gave by far the best results, showing a saving in a year of over $158 on 60 feet of 8 in. pipe at 100 lbs. pressure.
New York Fire Proof Covering Co., 121 Liberty St., N.Y.

IDEAS DEVELOPED. Absolute secrecy. Send for particulars. Advice and suggestions free. Correspondence and sample orders solicited. 25 years in business. Gardam & Son, 98 John St., New York.


GATES ROCK AND ORE BREAKERS
OVER 3000 IN USE THROUGHOUT THE WORLD
GREATER CAPACITY USING LESS POWER THAN ANY OTHER ON EARTH
MODERN MINING MACHINERY OF EVERY DESCRIPTION
GATES IRON WORKS DEPT T
650 ELSTON AVE. CHICAGO.

HYPNOTISM My original method $2. 100 pp. pamphlet 10c. One on Personal Magnetism 10c. Dr. Anderson, S A 7, Masonic Temple, Chicago.

Architecture, Mechanical Drawing, Electricity, Steam Engineering (Stationary Marine, Locomotive), Plumbing, Heating, Civil Engineering, Coal and Metal Mining, English Branches,
TAUGHT BY MAIL.
Twenty-seven Courses of Study. Send for *free* circular. State subject you wish to study.
The International Correspondence Schools, SCRANTON, PA.

ARMSTRONG'S ✻ PIPE ✻ THREADING —AND— CUTTING-OFF MACHINES



Both Hand and Power.
Sizes 1 to 6 inches.
Water, Gas, and Steam Fitters' Tools, Hinged Pipe Vises, Pipe Cutters. *Stocks and Dies universally acknowledged to be* THE BEST. ☞ *Send for catalog.*
Armstrong Mfg. Co., Bridgeport, Conn.

AUTOMOBILE CARRIAGES: THE Paris-Bordeaux-Paris Race of.—Brief account of the performance of the vehicles that obtained the prizes in the competition instituted by the Petit Journal. With 9 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 1023. Price 10 cents. To be had at this office and from all newsdealers.

MAGNETO BELLS
ALL KINDS OF PARTS TELEPHONES
ELECTRICAL SUPPLIES
SEND STAMP FOR CATALOGUE. MIANUS ELECTRIC CO. MIANUS, CONN.

BUY TELEPHONES
That are good—not "cheap things." The difference in cost is little. We guarantee our apparatus and guarantee our customers against loss by patent suits. Our guarantee and instruments are BOTH GOOD.
WESTERN TELEPHONE CONSTRUCTION CO.,
440 Monadnock Block, CHICAGO.
Largest Manufacturers of Telephones in the United States

HELLO, CENTRAL!
Do you use telephones? If so, we can give you just what you want. Our specialty is Blake Transmitters. There is a "best" in everything, and ours are the best. We supply complete telephones or all or any of the parts to construct a telephone. Write for illustrated catalogue.
PHŒNIX INTERIOR TELEPHONE CO.,
131 Liberty St., New York.

Mason-Maxwell Telephone Mfg. Co.
Makers of Local and Long Distance
Telephones, Switch-Boards, etc.
Send $6.00 for a sample of our House Telephone with battery, receiver and transmitter complete, guaranteed to work perfectly on lines up to 500 ft.
Factory and Offices, RICHMOND, VA.

For $1 currency or stamps, we will send by mail, postage paid,
A Sample PENBERTHY Grease Cup

capacity ⅞ oz. You will be delighted with it. Send for our catalog of specialties. Penberthy Injector Co.,
116 Seventh St., Detroit, Mich. GREASE CUP

ARTESIAN WELLS—BY PROF. E. G. Smith. A paper on artesian wells as a source of water supply. Essential geological conditions of artesian wells. Some chemical features of artesian well supply. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 943. Price 10 cents. To be had at this office and from all newsdealers.

EMPIRE
• BOILER CLEANER •
COMPOUND
We Don't Offer Gratuities, but our Circular will give you the information that will enable you to Save Time, Trouble and Money. *Tried, approved, and being used by the Largest Railways and Factories in the East.*
OFFICE:
Kemble Bldg., 19 Whitehall St., N.Y.

ICE-BOATS—THEIR CONSTRUCTION and Management. With working drawings, details, and directions in full. Four engravings, showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Horsfall, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, 1. The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

$26.50. An 8 Light 16 C.P. 110 Volt Dynamo



Not a toy, but a high grade, substantial machine, which we guarantee to do all we claim for it. We place this machine on the market at above low price in order to introduce our Dynamos and Motors of larger sizes.
☞ *Send for circular* No. 26.
ROTH BROS. & CO.,
30 to 34 Market St.,
Chicago, Ill., U.S.A.

FIRE BRICK FOR ALL PURPOSES.
☞ *Send for Prices and Catalogue.*
BROOKLYN FIRE BRICK WORKS.
88 Van Dyke Street, BROOKLYN, N. Y.



WOODEN TANKS.
For Railroads, Mills and Manufactories.
Builders of Steel Towers and Tanks.
La. Red Cypress Wood Tanks a specialty.
W. E. CALDWELL CO.,
217 E. Main Street, Louisville, Ky.

Original LAWTON Simplex Printer

100 copies just like original from any written or type-written letter, postal card, music, drawings, etc. No Stencil. Different colors at one impression. Indispensable if you want copies. Saves its cost in one day. Absolutely clean. No washing. Thousands in use. Get the genuine LAWTON. Imitations are useless. Four sizes, $3 to $10. ☞ *AGENTS WANTED.*
LAWTON & CO., 22 Vesey St., NEW YORK, N. Y.

© 1895 SCIENTIFIC AMERICAN, INC.

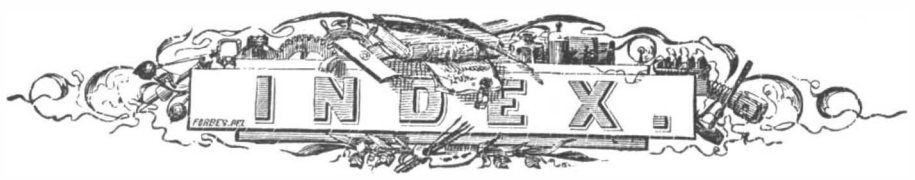

ILLUSTRATIONS.

A

Acetylene gas exhibit 360
Advertisement, shipping..... 392
American Surety building..... 329
America, yacht..... 185
Andree, M..... 20
Aquarium filter 245
Atlanta exposition ..53, 273, 305, 337
344, 360, 369, 393, 408
Axle, car, divided..... 325

B

Ball nozzle.....17, 218
Balloon with rudder..... 20
Banjo or guitar, new..... 52
Bar, handle, bicycle, Lovell's.... 410
Bar, prying, lumber..... 212
Battleship Iowa 296
Battleships Nos. 5 and 6..... 376
Bed, adjustable 132
Bell, blast furnace..... 292
Bell foundry, a..... 145
Belt shifter, Smith's..... 405
Bicycle attachment, Getman's.. 405
Bicycle brake.....132, 388
Bicycle case..... 68
Bicycle chains, substitute..... 4
Bicycle, land and water..... 164
Bicycle, magnetic..... 219
Bicycle path, new..... 120
Bicycle racing at Springfield..... 262
Bicycles, car hooks for..... 347
Bicycles, testing..... 100
Bicycle tire inflater 24
Birds, gigantic..... 203
Birds, paradise..... 59
Birmingham, Ala..... 361
Biscayte, port of..... 25
Blacksmith and his forge..... 379
Blast furnace bell..... 292
Boat, foot motor 388
Boats, tent canvas 152
Boiler covering..... 228
Boiler leveling device..... 181
Boiler, sectional..... 148
Bookholder, Taylor's..... 85
Boot or shoe holder..... 373
Boston subway..... 129
Brake, bicycle..... 388
Brake, carriage 36
Brake, vehicle, Davis'..... 390
Brass casting..... 165
Bridge, Brooklyn, station..... 241
Bridge, a tree 347
Brig, steam, New York..... 292
Brontornis, the 203
Brooklyn, cruiser..... 233
Brux, catastrophe of 139
Building, American Surety..... 329
Buildings, Atlanta Exp..... 393
Buoy, life, propeller 52
Button hole moistener..... 310

C

Cabinet, china..... 260
Caisson sinking, hydraulic..... 72
Camera, panoramic..... 86
Cameras, manufacture 37
Canal, coastwise, Atlantic..... 133
Canal, ship, North Sea 41, 43
Cannon, eighteenth century.... 276
Cannon, rawhide..... 73
Car axle, divided..... 325
Car coupling, Griffith's..... 196
Car hooks for bicycles..... 347
Car jack..... 341
Car protector..... 4
Carriage, horseless, of 1827..... 214
Carriages, automobile..... 40
Cars, life guard for..... 36
Car subway, Boston..... 129
Cars, unloading..... 308
Car ventilator..... 196
Car window sash..... 310
Cask storing rack 276
Chair, invalid, folding..... 181
Che-Foo 107
Church bell founpry 145
Cigarette packer, Noriega's..... 164
Clamp, fruit jar..... 4
Clocks, Chinese..... 261
Clocks, magnetic..... 88
Clothes rack, Bode's 372
Coal car dumper 312
Coal mines, Henryellen 362
Coal mine, Sumter 361
Coal mining, Pennsylvania...193, 201
Coal vein, a great..... 169
Coffee drier, improved 164
Condenser, steam 357
Coke ovens, Plart mine 361
Combs, horn, manufacture..... 180
Conduit system, electric..... 38
Copenhagen, port of 342
Cornell crew in England 55
Counter, Bristol..... 164
Coupling, car, Griffith's 196
Coupling, thill..... 68
Crane, quarry, new 71
Crimping tool..... 36
Cruiser Brooklyn..... 233
Cuba, insurrection in 8, 123
Currents, thermo-electric..... 55
Curtain bracket..... 68
Cutter, paper..... 212
Cutting off machine..... 309

D

Dam of Peryar..... 104
Davis, Edward C. F..... 134
Defender, yacht.....137, 187, 200
Derrick, portable 196
Desk, English, antique 260
Dock, side launch..... 56
Door and window shield, car.... 4
Dormouse, flying..... 75
Drag, motor..... 377
Dragon fly, giant..... 292
Drawbridge, Casseuil 9
Dredge, steam..... 41
Drill, electric..... 24
Drills, improved..... 324

E

Eclipse of the moon..... 395
Electrobat, the..... 315
Elevator attachment..... 21, 260
Elevators, stop for..... 181
Engine, compound, 500 h. p..... 121
Engine, pumping, improved .161, 166
Engine, traction..... 394
Engines, reversing, new..... 101
Envelope, reinforced..... 374
Ericsson, monument to 372
Exposition, Atlanta. .53, 273, 305, 337
344, 360, 369, 393, 408

F

Fairhaven railway..... 281
Fasteners, adjustable..... 170
Ferneries, hanging 331
Filter, water, the Carter..... 245
Fire escape, Leber..... 358
Fish exhibit, Atlanta..... 344
Flowers, perfuming..... 85
Flying machine, Pilcher..... 249
Fountain at Geneva 11
Fruit jar clamp 4
Fulton, war steamer..... 392
Furnace, Alice..... 385
Furnace, blast..... 21
Furnaces, Ensley..... 363
Furniture, antique. 260

G

Galton, Douglas..... 250
Garment measuring device..... 85
Gas, natural, Kansas..... 321
Gateway, hammered iron..... 183
Girders, defective 323
Glue and sizing, manufacture.. 117
Gold saving apparatus 181
Guard, life, for cars..... 36
Gymnasium, school room..... 345
Gyrograph, the..... 248

H

Harp, improved..... 138
Hat blocks, manufacture..... 378
Heron, the..... 27
Hinge, detachable 228
Home trainer 100
Horseback riding, art of 373
Hose tower, Painter's..... 100
Hub attaching device..... 116
Huxley, T. H..... 23
Hydrogen sulphide, experiment. 182

I

Incubator, electric..... 389
Indicator stop motion 341
Iowa, battleship..... 296
Iron industries, Birmingham ... 361
Ironwork, hammered.....177, 183

J

Jack, railway car..... 341
Joint, pipe, Sexton's..... 245

K

Key retaining device 358

L

Lac industry..... 309
Lantern, astronomical..... 4
Lawn mower, improved..... 100
Lawn mower, new 372
Letter copier, automatic 308
Library, Boston..... 289
Life preserver, De Ropp..... 213
Lightning arrester..... 357
Limbs, artificial..... 65
Locomotive, electric 81
Locomotives for steam supply... 1
Locomotive speeding truck..... 179
Lubricator, improved..... 132
Lumber measure..... 20

M

Mantels, slate..... 149
Melicerta ringens ..... 9?
Microscope for opaque objects.. 228
Mill, grinding, large 68
Monument to Ericsson..... 372
Moon, eclipse of 395
Morley, Edward W. 147
Mortiser, chain saw.....353, 356
Mortising machine..... 232
Motmot, Brazilian..... 285
Motocycle race 293, 315, 357
Motor drag 377
Motor, wind, improved..... 148
Mouldings sawing..... 276
Mt. Rainier..... 57
Mower, lawn, improved..... 100
Mower, lawn, new..... 372
Music leaf turner..... 324

N

Navigation, aerial 53
Navigation, high speed..... 52
New York, steam brig..... 392
North Pole by balloon 20
Nozzle, ball..... 17, 218

O

Omnibus, steam, 1833..... 404
Ore mine, Ishkooda..... 362
Ores, treatment of..... 148

P

Paper cutter..... 212
Pasteur..... 225
Perambulator, Morton's..... 196
Peryar, dam of..... 104
Photographic apparatus..... 33
Photography of retina..... 106
Photography, submarine..... 85
Piano, self playing..... 404
Pipe closer, Meyer's..... 100
Pipe connection..... 151
Pipe cutter, a 341
Pipe joint, Sexton's..... 245
Pipe, steam, covering..... 228
Pistol, repeating..... 69
Plow, subsoil 132
Port of Bizerte..... 25
Potato, mammoth..... 199
Power, horse, Beebe's..... 197
Press, printing, "Long Run".... 248
Printing, photographic..... 97
Propeller, boat, electric..... 181
Prying bar for lumber..... 212
Pump, bicycle, Stevens'..... 405

R

Rack, cask storing..... 276
Railroad, Fairhaven..... 281
Rail tie, Oliver's..... 324
Railway accident, French..... 340
Railway, [illegible]
Railway, electric, Middletown, ...
Railway, elevating, Otis.....209, 389
Railway, pole, a 389
Railway, pyramidal..... 171
Railway street sprinkler..... 394
Railway, Transsiberian..... 283
Reel, fishing, Halleck's..... 406
Retina, photography of 106
Riley, C. V..... 198
Royal William, steamer..... 392

S

Sash weights, manufacture of... 244
Savannah, steamer..... 392
Saw, Edlund's..... 116
Scarf pin device 246
Screw, Archimedean, toy..... 213
Seat, agricultural machine..... 36
Shaft alignment..... 21
Ship canal, North Sea..... 41, 43
Shutter fastener, Holman's..... 85
Signal, train, electric 212
Signal transmitter, electric..... 196
Silk growing in India..... 277
Sleigh, bob 52
Sokol, torpedo boat destroyer... 313
Springs, wagon 216
Stamp battery, steel frame..... 217
Stamps, printing, rubber..... 390
Steam condenser..... 357
Steamer Bay State 39
Steamer, cable, Mackay-Bennett, 401
409
Steamer North Land..... 47
Steamer St. Paul..... 345
Steamers, ocean, old..... 392
Steam supply from locomotives. 1
Steel, welding..... 229
Stone boat, improved..... 292
Stop for elevators..... 181
Stop motion, indicator..... 341
Street sprinkler, railway..... 394

T

Tag and tag driver..... 324
Tank, tempering..... 308
Telephone box 282
Telephone, transmitter..... 374
Tempering tank..... 308
Texas, warship..... 328
Thill coupling..... 68
Tie, rail, Oliver's..... 324
Time check receiver..... 212
Time in China..... 261
Tire inflater, bicycle 24
Tire, pneumatic, Growney..... 388
Tires, pneumatic, early..... 326
Tire valve, pneumatic..... 116
Top, artistic..... 248
Torpedo boat destroyer Sokol... 313
Transsiberian railway..... 283
Tricycle, petroleum 234
Trogon, narina..... 235
Trousers hanger..... 148
Truck, speeding, locomotive..... 179
Tube cleaner, Farie's..... 116
Tubes, iron, redrawing..... 5
Turret, disappearing..... 150
Turtles at Hamburg..... 251
Type setting machine..... 113

V

Valkyrie III..... 136
Valve, pressure regulating..... 260
Valve, tire, pneumatic..... 116
Velocipede, water..... 119
Ventilator, car 196
Vessel, sailing, largest 197
Vessels, sunken, raising 21
Victoria, Kane-Pennington..... 293
Vine cutter, Evans'..... 308

W

Wagon, dumping..... 325
Wagon, motor, Duryea.....293, 357
Warship Texas..... 328
War steamer Fulton..... 392
Water practice, army..... 152
Wheel, Phœnix..... 305
Wheel vs. the pedestrian..... 52
Windmill, toy 4
Window sash, car 310
Window shade, improved..... 36
Woman's Building, Atlanta..... 369
Wrestling, modern..... 299

Y

Yacht America, 1851..... 185
Yacht Defender..... 187
Yacht race, international..... 136
Yacht races of 1895..... 200
Yacht, racing, evolution.....168, 184
Yarn, dyeing and bleaching..... 84

MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.

A

Acetylene gas exhibit.....*360
Acid, carbonic, solid..... 116
Acid, ketonic, new..... 387
Acids of fruits..... .....22, 85
Adansonia fiber for paper..... 3
Advertising in drug business.... 214
Aerostation, exhibition of..... 3
Air jets, uses of..... 262
Air, liquid, in commerce..... 326
Alcohol, aging of..... 134
Alcohol, influence on longevity. 323
Alcohol, percentage, determining..... 5
Alcohol, quality of..... 227
[illegible] teaching as to. 342
Alligators, propagation of..... 153
Alumina from clay.....132, 358
Aluminum boats..... 186
Aluminum, corrosion of..... 55
America cup races..... 178
American Surety building..... *329
Analysis, soil, progress..... 2
Andree, M *20
Ang-khak, pigment 200
Angling by electric light..... 360
Animal humbugs..... 68
Animals, activity of 10
Animals in sterilized air..... 10
Animals in thermal springs..... 235
Anthracite vein, new 74
Antinounin 358
Antiseptic, a new..... 358
Ants, intelligence in..... 235
Aquarium filter..... *245
Arawaks, the..... 43
Arboretum, Vanderbilt..... 375
Archæologist, woman..... 83
Archæology, discoveries in..... 387
Argentina, enterprises in..... 325
Argon, discovery of 98, 391
Argon in meteoric iron..... 186
Armor plates, annealing..... 9
Armor plate for Russia..... 71
Armor of ship Iowa *296
Armor tests..... 70
Arms, improved..... 356
Army rations, condensed..... 292
Arsenic in steel..... 187
Asafetida..... 390
Asbestos, magnetism of..... 308
Asphalt beton, new..... 375
Asthma..... 225
Astronomer, new, at Lick 56
Atlanta exposition .*53, 66, 86, 102
114, 131, 154, 194, 226, 247, 273, 305
325, *337, *360, *375, *393, *408
Atmosphere, phenomena of..... 22
Autumn, tints of..... 307
Avalanche of Altel's glacier..... 274
Axle, breaking of..... 276

B

Bacteria in eggs..... 138
Bacteria in mineral waters..... 267
Balance, new adjunct to..... 42
Ball nozzle..... *17, *218
Balls, fire, at sea 405
Balloon with rudder *20
Banjo or guitar, new *52
Bank of England..... 267
Bar, handle, bicycle, Lovell's....*410
Bar, prying, lumber..... *212
Bathroom, Pompeian 19
Battery, gun lift, test 102
Battle of the Yalu 130
Battleship, French, latest..... 327
Battleship Indiana..... *258
Battleship Iowa..... *296
Battleship Maine 194
Battleship Texas 132
Battleships Nos. 5 and 6 .....*376
Beach mining, auriferous..... 360
Bed, adjustable..... *132
Bees, long tongued, need of..... 312
Beet sugar industry..... 295
Beetle, elm leaf.....22, 69
Beetle, long horn, in spruce..... 278
Bell, blast furnace..... *292
Bell foundry, Cincinnati *154
Bell, a great 339
Bell, Joseph..... 323
Belt shifter, Smith's..... *405
Berry culture..... 234
Bessemer process, electricity in. 70
Bible, largest, who has..... 346
Bicycle as a d to science and art. 50
Bicycle attachment, Getman's...*405
Bicycle brake.....*132, *388
Bicycle case..... *68
Bicycle chains, substitute..... *4
Bicycle, collision of..... 218
Bicycle insurance risks..... 55
Bicycle, land and water..... *164
Bicycle law 339
Bicycle, magnetic..... *219
Bicycle notes..... 35
Bicycle paint..... 21
Bicycle patents..... 150
Bicycle path, new..... *120
Bicycle, physics of.....66, 162
Bicycle pump..... 7
Bicycle racing at Springfield. *262
Bicycle and the horse..... 43
Bicycle tire cement..... 166
Bicycle tire inflater..... *24
Bicycle, why so popular..... 188
Bicycles, car hooks for..... *347
Bicycles, testing..... *100
Bicycling era..... 124
Bicycling, military..... 283
Bird hospital, Chicago..... 150
Birds, do they reason?..... 356
Birds, feeding habits of..... 74
Birds, flight of..... 279
Birds, gigantic, Patagonia..... *202
Birds, paradise..... *59
Birmingham iron industries.361, *391
Bizerte, port of..... *25
Blacksmith and his forge..... *379
Blacksmith, the..... 387
Blake, cruiser 355
Blast furnace bell..... *292
Blast, gun, pressure..... 234
Boats, aluminum..... 186
Boat, amphibious 118
Boat, foot motor..... *388
Boat, torpedo, new..... 57
Boats, tent canvas..... *152
Boiler cleaning compound..... 197
Boiler covering..... *228
Boiler experiments..... 230
Boiler leveling device..... *181
Boiler scale..... 70
Boiler scale, prevention of..... 42
Boiler, sectional *148
Boilers, firing with mixed coal, 178, 263
Bookholder, Taylor's..... *85
Boot or shoe holder..... *373
Boston harbor improvement..... 354
Boston Library *135
Bottle that cannot be refilled..... 338
Bottles, electric sealing..... 316
Boys, what should be known by. 341
Brain and heart..... 75
Brake, bicycle..... *388
Brake, carriage *36
Brake, vehicle, Davis'..... *390
Brass casting..... *165
Brick, a golden 57
Bricks, waterproofing..... 151
Bridge, Brooklyn, station..... *246
Bridge, North River, proposed... 258
Bridge, a tree..... *347
Bridges, masonry..... 42
Brine for removing snow..... 8
Brux, catastrophe of..... *139
Brooklyn, cruiser..... *232
Brontornis, the..... *202
Bronze, Defender's..... 327
Brooklyn Institute museum. ... 404
Broths,..... 26
Buffalo, extermination..... 330
Bugs, chinch, extermination..... 114
Bugs, croton, and office papers.. 92
Building, American Surety..... *329
Buildings, fireproof..... 359
Buildings, fireproof, defects of. *332
Buildings, modern, permanence 306
Buildings, portable..... 119
Buoy, life, propeller..... *52
Buoys, electric lighted..... 8
Business hints, three, good..... 246
Butter dishes, how made..... 135
Butter flavor, improving..... 42
Buttonhole moistner..... *310

C

Caisson sinking, hydraulic..... *72
Calcium carbide..... 358
Camera in the Rockies..... 201
Camera, panoramic..... *86
Canal, Cape Cod..... 182
Canal, coastwise, Atlantic..... *133
Canal, drainage, Chicago..... 294
Canal, Panama, progress..... 394
Canal, Seattle..... 182
Canal, ship, North Sea..... *41
Canal, ship, European 11
Cannon, 18th century..... *276
Cannon, leather..... 67
Cannon, rawhide..... *73, 122
Canton, population of..... 370
Caoutchouc, artificial..... 60
Cape Cod Canal 182
Car axle, divided..... *325
Car coupler patents..... 371
Car coupling, Griffith..... *196
Car fender, new..... 389
Car hooks for bicycles..... *347
Car jack..... *341
Car journals, weight on.. 150
Car, passenger, needed imp..... 215
Car protector, Ingalls'..... *4
Car ventilator..... *196
Car window sash *310
Car windows and blinds..... 119
Cars, cable, Philadelphia..... 102
Cars, poultry 39
Cars, railway, seasoned..... 101
Cars, street, fenders for..... 134
Cars, unloading..... *308
Carbon, electric production..... 212
Carbons in the arc light..... 371
Carborundum works, new..... 295
Carriage, the horseless..... 107
Carriage, horseless, of 1827 .....*214
Carriage, horseless, races .82, 183, 186
Carriage, motor, competitions... 66
Carriages, automobile *40
Carriages, electric road..... 307
Carriages, horseless..... 172
Carriages, horseless, contest..... 242
Carriages, horseless, in France.. 250
Carriages, motor..... 314
Cask storing rack *276
Castelar on the press..... 28
Cats and cold storage..... 39
Caves, glowworm..... 332
Cell, galvanic, new..... 227
Cells..... 92
Cement for cycle tires..... 166
Cement in mason work..... 316
Cement and sand..... 343
Centenarians, French 246
Chair, invalid, folding..... *181
Che-Foo *107
Chemical terminations, origin... 42
Chemist, how to succeed as a.... 163
Chickens, young, demand for.... 355
Chicory, cultivation of..... 122
Chiffonniers of Paris..... 406
Chimneys, draught of..... 9
Chinch bug extermination..... 114
Chloroform, preservation of..... 259
Cholera, cranberries in..... 276
Cholera, how suppressed..... 328
Chromatophores..... 290
Church bell foundry..... *154
Church census..... 19
Cigar case borer..... 40
Cigarette packer, Noriega's.....*164
Clamp, fruit jar..... *4
Clock, remarkable..... 327
Clocks, Chinese..... *261
Clocks, magnetic..... *88
Cloth, waterproof..... 407
Clothes pins, how made..... 135
Clothes rack, Bode's..... *372
Coal car dumper..... *312
Coal deposits, Alaska..... 72
Coal, formation of. 346
Coal mining, Pennsylvania..... *193
Coal vein, a great..... *169
Cocoanut, cultivation of..... 331
Coffee drier, improved..... *164
Coliseum, Chicago, collapse..... 194
College, sending boys to..... 219
Colorado River, exploring..... 410
Color cells of animals..... 290
Color sensation, theory of..... 187
Colors, sources of..... 70
Columbia, cruiser..... 82, 114
Columbia, mishap to the..... 68
Combs, horn, manufacture..... *80
Combustion, spontaneous..... 266
Comet, Faye's, return of..... 227
Comets, two new..... 259
Commensalism, a case of..... 10
Commerce, our foreign..... 120
Condenser, steam..... *357
Conductors, to reward..... 290
Conduit system, electric..... *38
Congress, geographical..... 83
Consumption..... 262
Co-operation, tale of..... 106
Copenhagen, port of..... *342
Cornell crew in England..... *55
Costume for photographing..... 171
Cotton exposition, Atlanta..... *53
Cotton piece goods..... 380
Counsel, good..... 230
Counter, Bristol..... *164
Countertypes..... 60
Coupler, car, patents..... 371
Coupling, car, Griffith's..... *196
Coupling, thill..... *68
Cranberries in cholera..... 276
Crane, quarry, new..... *71
Crimping tool..... *36
Crisis, the..... 402
Crown, royal, of England..... 3
Cruiser Blake..... 355
Cruiser Brooklyn..... *232
Cruiser Columbia..... 82, 114
Cuba, insurrection in..... *8, *123
Currents, earth, volcan. act. on.. 35
Currents, thermo-electric..... *55
Current arrester..... *357
Curtain bracket *68
Curves of least resistance 99
Cusack, John..... 363
Custards..... 26
Cut, draw, theory of..... 27
Cut flower company, N. Y..... 340
Cutter, paper..... *212
Cutting off machine..... *309
Cycle notes. 19, 51, 67, 83, 106, 115, 131
170, 183, 195, 227, 247, 259, 275, 291
323, 339, 355, 387, 403
Cycle, motor, contest, Chicago. . 242
Cycling and heart disease..... 314

D

Dam of Peryar..... *104
Davis, Edward C. F..... *134
Debt of the United States..... 346
Defender, bronze of..... 327
Dentistry in Japan..... 390
Derrick, portable..... *196
Destroyer, torpedo boat..... 185
Diamond, black, largest..... 260
Dies, made by photo..... 403
Diphtheria mortality..... 165
Diseases, incubation of..... 388
Dismal Swamp, the..... 220
Disinfecting system, Faraday ... 170
Dock, graving, new..... 100
Dock, side launch..... *56
Doctor of machinery..... 310
Documents, faded, restoring.... 215
Dogs, why we like 266
Door and window shield, car..... *4
Dormouse, flying..... *75
Drag, motor..... *377
Dragon fly, giant..... *292
Draught, induced..... 375
Drawbridge, Casseuil..... *9
Dream worth millions..... 246
Dredge, a powerful..... 329
Driftwood jam, a..... 201
Drill, electric..... *24
Drills, improved..... *324
Drop of water, a..... 358
Drops, formation of..... 186
Drops, size of..... 42
Druggists, trials of..... 101

E

Eagle, spread, Michigan 262
Earthquake on Atlantic coast... 187
Earthquake, cracked by 374
Earthworms 330
Eat? what shall we..... 311
Eaton, Prof. D. C..... 19
Echo in large halls..... 264
Eclipse of the moon *395
Economy, gas engine 407
Economics, problems in..... 34
Eel, whistling..... 331
Eggs, bacteria in..... 138
Electric shock..... 27
Electrical industry..... 1

© 1895 SCIENTIFIC AMERICAN, INC.

Electrical items.....51, 98, 114
Electricity, crankism of.....179
Electricity, development, trend.267
Electricity, how it sets fires..51
Electricity and the mails.....199
Electricity, notes on.....82
Electricity, possibilities of.....195
Electricity on war vessels.....87
Electricity, what is it.....331
Electricity, what it is doing.....225
Electrobat, the.....*315
Electrocution.....28
Electroplating, lactates for.....170
Eleusis, excavations at.....248
Elevator attachment.....*21, *260
Elevators, stop for.....*181
Emerald, analysis of.....386
Empire, British, American on.....313
Engine, compound, 500 h. p.....*121
Engine, expansion, quadruple.....8
Engine, traction.....*394
Engines, gas.....378
Engines, gas, elect. dist. power..3
Engines, reversing, new.....*101
Engineers, licenses of.....341
Engineers, Mechanical, Society..332
Engineering, great lake region..406
Engineering, naval, improv.....408
Engineering, U. S. Bureau of Steam.....402
English, teaching in college.....250
Engraving process, photo.....60
Enthusiasts, scientific.....213
Envelope, reinforced.....*374
Ericsson, monument to.....*372
Ether, the.....27
Etoile.....60
Exhibition, Paris, of 1900.....242
Expedition, Australian.....290
Expedition, scientific, northern..68
Explosion, boiler, Detroit.....407
Explosive, a fiberloid.....307
Explosive, new.....134
Exposition at Atlanta..*53, 66, 86, 102 114, 131, 154, 194, 226, 247, *273, *305 325, *337, *360, *375, *393, *408

F

Fabric, felted, new.....324
Fabrics, gilded.....247
Fabrics, non-shrinkable.....187
Factory, large, moving a.....246
Fairhaven railway.....*281
Fans, electric, cause fire.....39
Fasteners, adjustable.....*170
Fat people, warning to.....359
Fender, car, new.....389
Fender, the perfect.....217
Ferments, diastasic.....355
Ferneries, hanging.....*331
Ferris wheel in London.....103
Fever, typhoid, from milk.....364
Fiber, Adansonia, for paper.....3
Fibers, bast, of United States..7
Fiberloid, explosion of.....307
Filter, water, the Carter.....*245
Fire ball, a.....374
Fire escape, Leber.....*358
Fire escape, Painter's.....*100
Fires, colored.....6
Fires in Europe.....155
Fires in sky scrapers.....374
Fish, eye structure in a.....238
Fish hatchery, New York.....18
Fish, putrid, poisons of.....343
Fish, sucking, the.....245
Fish, torpedo.....92
Fishes, electric, discharge.....134
Fishes and snakes.....268
Flag, electric.....150
Fleas, remedy against.....215
Flowers, colors of.....74
Flowers, color of, alteration.....250
Flowers as food.....138
Flowers, perfuming.....*85
Fluorides, toxicity of.....70
Flying machine, Pilcher.....*249
Flywheel, bursting of.....324
Flywheel, an immense.....356
Flywheel, wire.....354
Food for the sick.....26
Foods, remedial.....358
Force and energy.....42
Forest, a submerged.....391
Forests, California, destruction..377
Fountain, Geneva.....*11
Fruit in glass.....204
Fruit jar clamp.....*4
Fruit market, New York.....275
Fruit as medicine.....300
Fruit cans, wood pulp.....316
Fruits, acids of.....22, 85
Fuel, artificial.....355
Fulton, war steamer.....*391
Funeral trains, electric.....344
Furnace, blast.....*21
Furnace for molasses.....90
Furniture, antique.....*260

G

Galton, Douglas.....*250
Galvanizing tank.....*308
Gambier.....307
Games, Olympic.....291
Gas engine for drawbridge.....7
Gas engines.....378
Gas holder, a great.....99
Gas mains, electrolyt. act.....50
Gas, natural, Kansas.....*321
Gas, Pictet's.....186
Gases as germicides.....231
Gases, liquefaction of.....345
Gelatine, saline digestion of.....377
Gelsoline.....134
Geographical Congress.....83
Gila cities, ruined.....313
Girders, defective.....*323
Glass, ancient.....11
Glass, boring of.....60
Glass, inventions in.....298
Glass makers, ancient.....342
Glass measures, graduating.....346
Glass, photo decoration.....90, 167
Glass plates, colored.....371
Glass, porosity of.....118
Glass, silvering.....200
Glowworm caves.....332
Glucinium carbide.....375
Glucose as food.....24
Glue and sizing manufacture..*117
Gold, alloys of.....11
Gold beating, process of.....294
Gold beneath lava.....408
Gold extraction process.....146
Gold mining, improvement.....314
Gold in photography.....179
Gold production.....245
Gold saving apparatus.....*181
Gold, substitute for.....384
Gold and silver.....379
Golf, practical.....171
Goodyear, invention of.....252
Grapefood.....134
Grate, Reagan.....211
Greek, living.....228
Greek language.....38
Green, Paris.....230
Grubs, rat tailed.....122
Gruel, milk.....26
Grover, William O.....211
Guard, life, for cars.....*36
Gulf weed.....153
Gulls following ships.....54
Gum, an African.....137
Gum benjamin industry.....211
Gun blast, pressure.....234
Gun, Maxim.....10
Gun, Maxim, new.....226
Gun, the rawhide.....122
Guns, great, manufacture of.....8
Guns, leather.....67
Guns, Maxim.....152
Gutta percha leaves.....228
Gutta percha substitute.....134
Gymnasium, school room.....*345
Gyrograph, the.....*248

H

Hair lotion, a famous.....342
Hair worms and hosts.....387
Harp, improved.....*138
Hat blocks, manufacture.....*378
Headache, cure for.....266
Heart disease and cycling.....314
Heavens in August.....67
Heavens in December.....339
Heavens in July.....3
Heavens in November.....275
Helium and argon.....218
Helium, terrestrial.....50
Hermit of Moose Island.....363
Heron, the.....*27
Hinge, detachable.....*228
Hoeing, philosophy of.....56
Home trainer.....*100
Horror, mechanical.....327
Horse and the bicycle.....43
Horse, hair of, color.....235
Horse, old, memory of.....213
Horses, do they weep?.....108
Horseback riding, art of.....*373
Hose tower and fire escape.....*100
Hospital, bird, Chicago.....150
House numbering.....345
Hub attaching device.....*116
Humbugs, animal.....68
Hunt, Richard M.....83
Huxley, T. H.....*23
Hydraulic power supply, a.....114
Hydrogen peroxide.....86
Hydrogen sulphide, experiment.*182
Hydro gn wall, the.....70

I

Implements, agricultural, tests..34
Incubator, electric.....*389
India rubber in Jamaica.....133
Indiana, battleship.....*258
Indicator, stop motion.....*341
Indigo, artificial.....187
Insect flowers, Dalmatian.....347
Insect friends and foes.....183
Insect, the strangest.....6, 375
Insect, a swimming.....235
Insect stings, remedy for.....390
Insect wings, staining.....235
Insects, Central America.....230
Insects as man's friends.....103
Institute of France.....329
Institute, Pasteur, farm.....387
Invention, electric, stride in..60
Invention, railroad, review.....58
Invention, useful principle in....330
Inventions, clever.....152
Inventions in glass.....298
Inventions, recently patented.12, 28 44, 61, 76, 93, 108, 125, 140, 156, 172 189, 204, 220, 236, 252, 269, 284, 300 317, 332, 348, 364, 380, 396, 411
Inventions, small, valuable.....167
Inventor, famous, death of.....311
Inventors, rewards for.....108
Iowa, ship armor of.....*296
Iron tubes, redrawing of.....*5
Iron, direct puddling of.....134
Iron in food.....171
Iron Indus., Birmingham..*361, *391
Iron, malleable.....119
Iron, paints for.....148
Iron work, hammered.....*183
Iron work, painting.....250
Irone.....39
Isle of Shoals.....274

J

Jack, railway car.....*341
Japanese, civilization of.....323
Jaws, human, force.....405
Jelly, milk.....26
Jerome Park reservoir.....259
Jewelers, women.....182
Joint, pipe, Sexton's.....*245
Jury, psychology of.....104

K

Katahdin, trial of.....291
Kea, New Zealand.....236
Kerosene oil spray, author.....227
Key retaining device.....*358
Kites, giant, scientific.....75
Kodak in the pyramid.....119
Krushite.....71
Kutho Daw.....20

L

Labor, emancipation of.....179
Labor, triumphs of.....133
Laboratory, biological, a.....99
Lac industry.....*309
Laccase in plants.....235
Lakes in British Columbia.....54
Lakes, temperature of.....338
Lamp, incand., Jonah and.....23
Land registration.....344
Langen, Eugene.....259
Lantern, astronomical.....*4
Lanterns, optical.....57
Latitude not fixed.....338
Laurel and sassafras.....279
Lava of Idaho.....362
Lawn mower, improved.....*100
Lawn mower, new.....*372
Lawns, velvety.....169
Lead pencils, manufacture of..387
Lead, soldering.....227
Lead, welding.....170
Leads, industrious.....363
Letter copier, automatic.....*308
Letter registering machine.....102
Levee, building a.....105
Library, Boston.....*237
Life savers, work of.....362
Life preserver De Ropp.....*213
Light, electric, plant.....227
Light, new standard of.....122
Lighthouse at Cape Charles.....55
Lightning by luminescence.....247
Lightning plant, battery.....326
Lightning arrester.....*357
Lightning and barns.....124
Lightning, calculated power of..243
Lightning, photos of.....20
Lightning rods, safer than.....11
Lignite industry, Dakota.....279
Lilac borer, the.....106
Limbs, artificial.....*65
Lobsters, how hatched.....268
Locking board for keys.....*358
Locomotive, electric.....*87
Locomotive, electric, B. & O.....278 327
Locomotive, a fast.....116
Locomotive, fireless.....264
Locomotive of the future.....210
Locomotive speeding truck.....*179
Locomotives for steam supply...*1
Longevity and activity.....89
Loom, Jacquard, history of.....87
Lotus, sacred.....154
Lubricator, improved.....*132
Lumber measure.....*20
Luminescence.....249
Luminescence, lighting by.....247

M

Machinery as an educator.....38
Machinery, doctor of.....310
Machinery, labor saving.....150
Magnets and low temperature.....60
Magnetism of asbestos.....308
Maine, battleship.....194
Malpractice, medico-legal points 243
Man, the electric.....120
Mantels, slate.....*149
Maple sugar.....316
Mars, no water vapor in.....390
Masonwork cements in.....316
Matterhorn, perils of the.....202
Measuring device, garment.....*85
Medicine, discoveries in.....28
Melicerta ringens.....*91
Memorizing, mathematical.....155
Memory and mental energy.....58
Men of stone.....325
Metal, new, for electr. ind.....134
Metal and timber, strength of..6
Metal makers of Asia.....33
Metals, melting points of.....356
Meteorite, El Capitan.....186
Mice, waltzing.....294
Michigan spread eagle.....262
Microscope for opaque obj.....*228
Milk, electrolysis of.....395
Milk, frozen.....116
Milk, solidified.....359
Mill, grinding, large.....*98
Mill, great, Fall River.....298
Millers, important to.....314
Million, how to make a.....375
Mine on fire forty years.....109
Miner, a woman.....86
Minerals, spectrum analysis.....187
Mining, auriferous beach.....360
Mining, coal, Pennsylvania.....*193
Mining, gold, improved.....314
Mining and milling methods.....170
Mining near the equator.....116
Mining sulphur, Louisiana.....388
Mirror, electric.....24
Mississippi, wonders of.....355
Molasses, burning.....90
Molasses pavements.....90
Molybdenum.....70
Monument to Ericsson.....*372
Moon, eclipse of.....*395
Moon, influence on weather.....163
Moore, Hollis W.....347
Mordants, photographic.....356
Morley, Edward W.....*147
Mortiser, chain saw.....*353
Mortising machine.....*232
Mosquitoes that overcome man.245
Motmot, the.....*235
Motocycle award.....370
Motocycle contest, Chicago.242, 278
Motocycle race.....*293, *315, 354, *357
Motor drag, De la Vergne.....*377
Motor, sewing machine.....394
Motor, traction, for trains.....20
Motor, vehicle, competitions.....66
Motor, wind, improved.....*148
Motors, electric, high speed of..6
Motormen, to reward.....290
Mouldings, sawing.....*276
Mount Rainier.....*57
Mount Vesuvius, eruption.....372
Mouse, shrew, poison of.....74
Mower, lawn, improved.....*100
Mower, lawn, new.....*372
Muck land on fire.....84
Mushroom spawn.....147
Music, Greek, ancient.....387
Music leaf turner.....*324
Musk.....70
Myopes.....31 1

N

Nails, cut and wire.....25
Naphtha for cleaning wool.....
Naphtha, use of.....102
Natural history notes.....10, 74, 153 235
Naval notes.....43
Navigation, aerial.....*53
Navigation, high speed.....*52
Navigation, steam, father of.....263
Navigation, steam, ocean...886, *392
Navy estimates.....316
Neumann, Franz.....35
Newspaper, telephone.....267
New York, steam brig.....*392
Niagara electric system.....41
Niagara Falls plant.....149
Nitrogen and phosphorescence..277
North Land, steamer.....*49
North Pole by balloon.....*20
Nosebleed, remedy for.....372
Nozzle, ball.....*17, *218

O

Ocean, maximum depth.....380
Oil, croton, vesicating constituent.....91
Oil prospectors on Jordan.....374
Oil spots on paper, to remove....403
Oils, scented.....199
Omnibus, steam, 1833.....*404
Optical works, Zeiss.....212
Oranges and lemons, Spanish.....155
Ores, treatment.....*148
Organ echo, Westminster.....263
Ornithorhynchus, poison of.....10
Oxygen? is it simple.....134

P

Paint, black, bicycle.....21
Paint for ships' bottoms.....139
Paints for iron.....148
Painting iron work.....250
Paintings, photographing.....57
Panama Canal, progress.....394
Papaya, the.....22
Paper, albumenized.....60
Paper cutter.....*212
Paper, leather, Japanese.....122
Paper making, fiber for.....3
Paper, photographic, new.....217
Paper pulp for leaks.....187
Paper pulp shoe heels.....355
Paris Exhibition of 1900.....242
Paris green.....230
Parks near cities.....25
Paste.....4
Pasteur.....*225
Pasteur, funeral of.....278
Pasteur Institute farm.....387
Paten Commissioner's report..121
Patent decision, important.....379
Patent infringement suit.....264
Patent law, proposed.....282
Patent law, Russian, new.....56
Patent Office ruling, a.....322
Patent, Sawyer-Mann.....330
Patents, bicycle.....151
Patents, car coupler.....371
Patents, decisions relating to...67 115, 188
Patents, English.....36
Pauperism, cost of.....225
Pavements, molasses.....90
Peary, good for.....5
Peary, Lieut., return of.....226
Peat, new uses for.....204
Pencils, lead, manufacture of...387
Perambulator, Morton's.....*196
Perfumes, diffusion of.....42
Personality, duplex.....204
Peryar, dam of.....*104
Petroleum, purification of.....137
Petroleum tanks, towing.....88
Philosophy, rewards of.....390
Phonograph, the, and the pump.197
Phosphorescence.....179, 227
Photo-engraving process.....60
Photographic apparatus.....*33
Photographic Company, Atlanta 226
Photographic notes.....60
Photographs, coloring.....27
Photographs in colors.....60
Photographs, enlarged.....107
Photographs, gold lacquer.....41
Photography for drunkenness...316
Photography, gold in.....179
Photography of heavens.....92
Photography, mordants for.....356
Photography in music rest.....115
Photography out West.....263
Photography of retina.....*106
Photography, submarine.....*85
Piano, force used on.....198
Piano, self-playing.....*404
Piano wire, motions of.....23
Pictures in colors.....60
Pigeon tremex, the.....123
Pigment, a Chinese.....200
Pike, longevity of.....235
Pin machine, a.....115
Pineapple cultivation.....26
Pinions, wood pulp.....179
Pipe closer, Meyer's.....*100
Pipe connection.....*151
Pipe cutter, a.....*341
Pipe joint, Sexton's.....*245
Pipe line, sewerage.....268
Pipe lines, wrought iron.....292
Pipe, steam, covering.....*228
Pipe, steam, new.....227
Pipes and drains, testing.....311
Pistol, repeating.....*69
Plants under colored glass.....235
Plants, evolution among.....10
Plants and light.....74
Plants, role of water in.....154
Plants, secretions in.....10, 153
Plants, sensitiveness of.....74
Plaster casts, to mend.....312
Plates, photographic.....146
Plow, subsoil.....*132
Plum, Japanese.....228
Pneumatic system, London.....75
Police, London.....404
Police signal, new.....204
Polka, inventor of.....225
Pope, Franklin L.....259
Porcelain decoration.....90
Porcelain decoration, photo.....167
Port of Bizerte.....*25
Position finders, tests of.....1
Potato, mammoth.....*199, 246
Potatoes, field experiments.....395
Poultry cars.....39
Power distrib. from gas engines.3
Power, electric, New York.....391
Power for electric traction. 220. 340
Power, horse and pump.....*197
Power, hydraulic, supply....114, 242
Power, motive, wind as.....354
Power plant, Niagara Falls.....343
Power, water, transmission.....274
Press, Castelar on the.....28
Press, printing, improved.....*248
Printer's rollers (6605).....125
Printing in several colors.....356
Printing, photographic.....97
Prison, Tourah.....105
Prize, scientific, award of.....306
Projection, stereoscopic.....327
Propeller, boat, electric.....*181
Propeller shafts, breakage.....394
Prying bar for lumber.....*212
Pump, bicycle, Stevens'.....*405
Pumping, automatic.....*36
Pumping, philosophy of.....188
Punch, milk.....26
Punkah puller, the.....293
Pyrotechny.....6

R

Race, Paris-Bordeaux.....186
Races, cup, America.....178
Races, yacht, 1895.....*200
Rack, cask storing.....*276
Rail from N. Y. to S. Francisco..378
Rail tie, Oliver's.....*324
Railroad, Fairhaven.....*281
Railroad invention, new.....58
Railroad, mountain, India.....296
Railroad speed, fast.....243
Railroad, transsiberian.....274
Railroading, fast.....283
Railway accident, French.....*340
Railway accident, remarkable...119
Railway accidents in 1894.....124
Railway, electric, Chicago.....4
Railway, electric, losses.....359
Railway, electric, model.....*257
Railway, elevating, Otis.....*215
Railway enterprise, Egypt.....27
Railway, pole, a.....*389
Railway, pyramidal.....*171
Railway records, high speed.....178
Railway robberies, to hinder.....263
Railway, Siberian.....116
Railway speed, fast.....266
Railway speed, remarkable.....131
Railway street sprinkler.....*394
Railway through the sea.....308
Railway transsiberian.....*282
Railways, electric, U. S.....152
Railways and patented articles..236
Railways, street, of U. S.....259
Rain, action of the.....266
Rain drops, electrification by...187
Rations, army, condensed.....292
Redwood for pencils.....370
Reel, fishing, Halleck's.....*406
Refrigeration.....316
Reis, place of, in telephony.....35
Remora, the.....245
Reservoir, Jerome Park.....259
Retina, photography of.....*106
Retouching surfaces.....57
Riley, C. V.....*198
River, great, Canada.....300
Road, how to build a.....58
Roads, bad, cost of.....355
Roads, electric, gradients.....196
Roads, good, caring for.....195
Robberies, railway, to hinder....263
Roche, Thomas C.....306
Rogers, Prof. Elliott A.....227
Rope, wire, ancient.....50
Rose from the ranks.....374
Royal William, steamer.....*392
Royalties.....74
Rubber shoes, old.....267
Rubber stamp industry.....247
Rubber, vulcanized.....252
Rust.....279
Rust in wheat, prevention of.....258
Ruwenzori.....18

S

Safety appli. for electric wires...313
Safety devices wanted.....70
Sails, paper.....54
Sand and cement.....343
Sands, drifting, preventing.....54
Sash weights, manufacture of...*244
Savannah, steamer.....*392
Saw, Edlund's.....*116
Sawing machine, Long's.....*276
Sawyer, Sylvanus.....311, 391
Scarf pin device.....*246
Science, Amer. Assoc.....130, 146, 162
Science notes...70, 83, 134, 187, 227, 247 375
Screen, lined.....60
Screw, Archimedean, toy.....*213
Seat, agricultural machine.....182
Seattle Canal.....10
Seaweeds, preserving.....153
Seaweed, wonderful.....
Seeds, curious, and their use.....21
Seeds, germination of.....235
Serpent bites, cure of.....122
Serpent, sea, another.....211
Sewing machine motor.....394
Sewerage pipe line.....268
Shaft alignment.....*21
Shells, uses of.....231
Shipbuilding for the year.....41
Ship canal, North Sea.....*41
Ship, sailing, great.....345
Ship of war Indiana.....*258
Ships.....203
Ships, iron, sheathing of.....70
Ships of war, British.....108
Shock, electric.....27
Shoe heels, paper pulp.....355
Shoes, rubber, old.....267
Shrimps, parthenogenesis in.....153
Shutter fastener, Hulman's.....*85
Sick, food for.....26
Signal, police, new.....204
Signal service wanted.....102
Signal, train, electric.....*212
Signal transmitter, electric.....*196
Signaling, long distance.....362
Silk growing in India.....*277
Silk, spider.....155
Silver from silver bromide.....388
Silvering glass.....200
Sirups, table.....294
Skeleton, fossil, large.....24
Skin, artificial.....394
Sky, January, the.....402
Sleep, new theory of.....124, 186
Sleigh, bob.....*52
Slides, lantern, making.....123
Smoke prevention, locomot.....278
Snake, grafted.....321
Snakes, fascination by.....131
Snakes and fishes.....268
Snow, carbonic.....187
Society, village improvement....71
Sodium, metallic.....86
Soil analysis, progress of.....2
Sokol, torpedo boat destroyer...*313
Solar system size of.....251
Solders for glass.....134
Spanish, value of.....75
Spectacles, queer kinds of.....343
Spectrum, invisible, the.....389
Spectrum, the invisible.....199, 347
Spectrum, rays of.....134
Spider farming.....139
Spider plant, the.....245
Spider silk.....155
Spiders, habits of.....137
Spool industry, history of.....295
Spools.....197
Spools, new material.....403
Spray, kerosene, author of.....227
Springs, wagon.....*216
Stains, removal of.....218
Stamp battery, steel frame.....*217
Stamp, rubber, industry.....247
Stamps, printing, rubber.....*390
Star clusters, variable.....331
Star, new in Carina.....315
Star, variable, new.....407
Star trails.....58
Stars in September.....147
Steam condenser.....*357
Steam supply from locomotives..*1
Steamboat, land and water.....118
Steamer Bay State.....*39
Steamer Cable, Mackay-Bennett *401, 409
Steamer, cargo, large.....
Steamer North Land.....*49
Steamer St. Louis.....6, 131, 232
Steamer St. Paul, trial.....273, *345
Steamers, stopping of.....188
Steamship, a great.....151
Steamships, transatlantic, earliest.....182
Steel, arsenic in.....187
Steel, hardening by gas.....210
Steel making, new process.....75
Steel welding.....*229
Stellar systems, dimensions.....394
Stereo-jumelle.....60
Stereoscopic projection.....327
St. Louis, speed test of.....131
St. Louis, steamer.....6, 232
Stings, insect, remedy for.....390
Stone boat, improved.....*292
Stone, seasoning of.....2
Stop for elevators.....*181
Stop motion, indicator.....*341
Stoves, oil and gas, danger.....213
St. Paul, accident on.....407
St. Paul, steamer.....*345
St. Paul, trial trip.....273
Strawberry, Oriole.....228
Street sprinkler, railway.....*394
Strikes in the U. S. and Europe..370
Structures, tallest, world's.....347
Students as conductors.....219
Study, summer, for city children.....34
Subway, Boston.....*135
Sugar, beet, industry.....295
Sugar, maple.....316
Sulphur mining in Louisiana.....388
Surgery, dental, progess.....103
Swallow tail, tiger.....106

T

Tag and tag driver.....*324
Tank, tempering.....*308
Tanks, petroleum, towing.....88
Tannin from palmetto leaves....42
Tannin plant, a new.....247
Tanning, new process.....375
Taylor, J. Traill.....322
Tears a safety valve.....232
Teeth, implantation of.....103
Telegraph, history of the.....118
Telegraph, invention of.....231
Telegraph invention, Herz's.....140
Telegraphy, long distance.....123
Telephone, cavalry.....39
Telephone, inventor of the.....167
Telephone motion denied.....324
Telephone newspaper.....267
Telephone system, police.....388
Telephone, transmitter.....*374
Telephone, wireless.....164
Telescope, another large.....230
Tellurium.....164
Texas, battleship.....132, *328
Thermophone.....380
Thill coupling.....*68
Thumping obstinate.....219
Tie, rail, Oliver's.....*324
Timber and metal, strength of...6
Timber, Washington.....44
Time check receiver.....*212
Time in China.....*261
Time, new measurement.....42
Tin, Australian.....164
Tin, recovery of from scrap.....42
Tin, world's production.....210
Tire inflator, bicycle.....*24
Tire, pneumatic, Growney.....*388
Tire valve, pneumatic.....*116
Tires, cycle, cement for.....166
Tires, pneumatic, early.....*326
Tires, pneumatic, protection.....41
Tires, rubber, porous.....137
Tissue for wounds.....283
Toads, breeding habits of.....248
Tobacco boxes.....346
Tobacco factory, primitive.....103
Tools, engineering, Pompeii.....310
Tool steel industry.....*229
Top, artistic.....*248
Torpedo boat Destroyer.....185
Torpedo boat destroyer Sokol..*313
Torpedo boat practice.....364
Torpedo boats.....57
Torpedo boats, new, cost.....344
Torpedo, new, trial of.....377
Traction, electric, power for...340
Traction trials in Berlin.....278
Trade, our export.....363
Trades, influence on faces.....42
Train, fastest in the world.....374
Train, high speed.....332
Trains, funeral, electric.....344
Transportation, world's.....199
Transsiberian railroad.....274, *282
Tree ages.....363
Tree pests.....22
Tree, a petrified.....6
Trees in Central America.....230
Trees, petrified, Arizona.....362
Trees, plant.....150
Trees, shade, electrocution.....172
Trees, some remarkable.....230
Tricycle, petroleum.....*234
Trogon, Narina.....*255
Trolley, aqua aerial.....*89
Trolley improvements required. 371
Trolley, the, St. Louis.....118
Trolley, underrunning, patent...410
Trousers hanger.....*148
Trout, musky.....39
Truck, speeding, locomotive.....*179
Tube cleaner, Faries.....*116
Tubes, iron, redrawing.....*5
Tuberculosis.....262
Turbines, new for Niagara.....259
Turret, disappearing.....*150
Turtles at Hamburg.....*251
Type setting machine.....*118
Typography a Roman art.....68

U

University of Chicago.....323
Upas tree, the.....74

V

Valve gear, trip.....185
Valve, pressure regulating.....*260
Van Gestel, travels of.....291
Varnish trees.....140
Varnish, waterproof.....72
Vaux, Calvert.....339
Vehicle, horseless.....107
Velocipede, water.....*119
Velox paper, photo.....217
Ventilator, car.....*196
Venus, notch of.....20
Vertebrates, resist. to thirst.....10
Vessel, air, Caballero's.....*53
Vessel damaged by a whale.....293
Vessel, sailing, largest.....*197
Vessels lost in 1894.....240
Vessels, sunken, raising.....*21
Vine cutter, Evans'.....*308
Vulcanization, how done.....54

W

Wages of British workmen.....246
Wages, low, in Japan.....122
Wagon, dumping.....*325
Wagon, motor, Duryea.....*351
Wa hut, [illegible].....375
Warship Texas.....*328
War steamer Fulton.....*392
War telephone.....164
War vessel frame, test.....188
Wasps, suicidal.....390
Water, a drop of.....358
Water mains, electro. act.....50
Water practice, army.....*152
Waterproofing for fabrics.....170
Water, salt, utilization.....26
Water supply for London.....279
Water supply of Rome.....332
Water trees, Australian.....298
Water wheel, new.....510
Waters, mineral, bacteria in....267
Weather and disease.....294
Weather, man's susceptibility to 212
West, arid, future of.....19
Whales ashore.....188
What we need.....120
Wheat, rust in, prevention of....258
Wheel vs. the pedestrian.....*52
Wheel, Phœnix.....*305
Wheel, water, new.....310
Wheelmen, American, league.....35
Whistling device.....24
Wife beating in Germany.....262
Wind as a motive force.....354
Wind velocities.....122
Windmill, Schon's.....*341
Windmill, toy.....*4
Window sash, car.....*319
Window shade, new.....*36
Wire rope, ancient.....50
Wires, electric, appli. for.....313
Wood, drift, jam.....201
Wood of most uses.....18
Wood pulp fruit cans.....316
Wood pulp pinions.....179
Wood, steaming black.....345
Wool, cleaning.....44
Wool for underclothing.....391
Wool scouring, naphtha.....321
Woman archæologist, a.....83
Woman's building, Atlanta.....*375
Woman miner, a.....86
Women jewelers.....182
Women, orchestral.....327
Workmen, British, wag of.....246
Worms, hair, and hosts.....387
Wrestling, modern.....*299

Y

Yacht race, international.....*136
Yacht races of 1895.....*200
Yacht, racing, evolution.....*168, *184
Yahu, battle of the.....130
Yarn, dyeing and bleaching.....*84
Yell, Mark Twain's.....236

Z

Zeiss optical works.....212
Zero, tending toward.....90
Zinc plate for lithog. print.....139

© 1895 SCIENTIFIC AMERICAN, INC.

Founded by Mathew Carey, 1785.

HENRY CAREY BAIRD & CO.
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

☞ Our New and Revised Catalogue of Practical and Scientific Books, 90 pages, 8vo, and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.

BARNES'
New Friction Disk Drill.
FOR LIGHT WORK.
Has these Great Advantages:
The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for catalogue.
W. F. & JNO. BARNES CO.,
1999 Ruby St., - Rockford, Ill.

THE SUBMERGED PIPE LINE ACROSS the Willamette River at Portland, Oregon.—By F. and A. S. Riffle. Description of a line of 28-inch cast iron submerged pipes forming portion of the main line constructed during 1893 and 1894, to supply the city of Portland with pure water from Bull Run, a mountain stream thirty miles distant. With 13 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **1019** and **1020**. Price 10 cents each. To be had at this office and from all newsdealers.

CRITERION
STEREOPTICONS, MAGIC LANTERNS & ACCESSORIES.
PERFECT APPARATUS for VISUAL TEACHING
SCIENTIFIC PROJECTIONS & PRIVATE USE.
ELECTRIC FOCUSING LAMPS
For Photo-Engravers, Stage Lighting, Etc.
SEND FOR CATALOG
Agencies in BOSTON PHILADELPHIA ATLANTA ST. LOUIS BUFFALO CHICAGO SAN FRANCISCO
J. B. COLT & CO.
115-117 NASSAU ST.
NEW YORK.

Bauer's Economical Flue Scrapers
(*Patented*)



remove scale and sediment from outside of boiler flues. Made of tool steel, hardened, 2 edges on each scraper. Save fuel, flues, compound, etc. Sent on trial. Used in 93 cities. Send for illustrated circulars. $10 per set. 25 per cent. off until Jan.
E. RAYFIELD, 371 Dearborn St., CHICAGO

DO YOU **USE GRINDSTONES?**
If so, we can supply you. All sizes mounted and unmounted, always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. ☞ *Ask for catalogue.*
The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

Valuable Holiday Gift!
A COPY OF
Experimental Science
Seventeenth Edition.

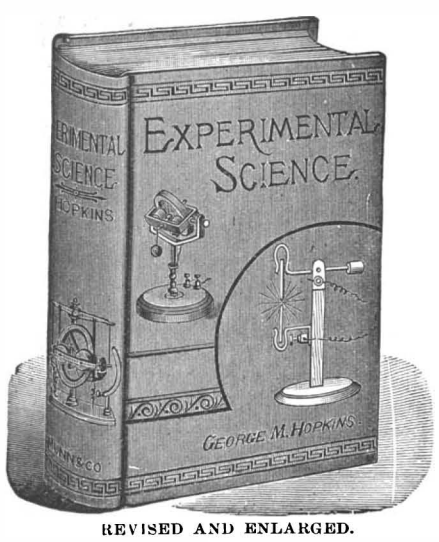

REVISED AND ENLARGED.
120 Pages and 110 Superb Cuts added.

Just the thing for a holiday present for any man, woman, student, teacher, or anyone interested in science.
In the new matter contained in the last edition will be found the Scientific Use of the Phonograph, the curious optical illusion known as the Anorthoscope, together with other new and interesting Optical Illusions, the Optical Projection of Opaque Objects, new experiments in Projection, Iridescent Glass, some points in Photography, including Hand Cameras, Cane Cameras, etc.; Systems of Electrical Distribution, Electrical Ore Finder, Electrical Rocker, Electric Chimes, How to Color Lantern Slides, Study of the Stars, and a great deal of other new matter which will prove of interest to scientific readers.
840 pages, 782 fine cuts, substantially and beautifully bound. Price in cloth, by mail, **$4**. Half morocco, **$5**.
☞ *Send for illustrated circular.*
MUNN & CO., Publishers.
Office of the SCIENTIFIC AMERICAN,
361 BROADWAY, NEW YORK.

VELOX PAPER A Revolution in Photographic Printing.
When exposed to the same light, prints **500 times quicker than albumen.** . .
GLOSSY or MATT. No dull or rainy weather to interfere with your work. **No dark rooms nor complicated** manipulation.
Developed and toned *as fast as the printing frames can be filled. A choice of tones more beautiful than can be produced on any other paper.* Permanent prints. The greatest paper for hot or damp climates. **35 cents** in stamps brings two sample dozen cab's, developer and three sample prints. **Nepera** Platinoid, Enameled and Rough *Bromide Papers* are the best and most uniform in the market. **Nepera P O P,** an *insoluble* gelatine paper. **Rembrandt,** a Matt Printing-out Paper.
Nepera Chemical Co., Sole Manufacturers, NEPERA PARK, N. Y.

Genuine Hard Porcelain
FOR
ELECTRICAL PURPOSES.
Prices and Estimates on Special Work Given on Application.
BRUNT & THOMPSON,
Successors to HENRY BRUNT & SON, Manufacturers.
East Liverpool, Ohio.

Send your business card for 150 p. 1895 catalogue.



NICKEL
AND
ELECTRO-PLATING
Apparatus and Material.
THE
Hanson & VanWinkle Co.
Newark, N. J.
81 LIBERTY ST., N. Y.
35 & 37 S. CANAL ST., CHICAGO.

Ice-Bicycle
120 MILES AN HOUR

Send us $15 for attachments, complete, delivered free or write us, we will mail you catalogue which will explain fully. Confidential discounts to dealers.
CHICAGO ICE-BICYCLE APPARATUS CO., 201 Clark St., Chicago, Ill.

ANDERSON AUTOMATIC LETTER COPIER.
File Letter and Answer Together.



Makes perfect copies typewritten or pen letters at the rate of 20 *letters a minute, costing 1 cent for paper.* Gives copied effect to circular letters at 5 cents a hundred. No brush. No copy book. Handsomely nickel plated. Price $25. *Agents wanted. Sent anywhere on receipt of price.*
ANDERSON LETTER COPIER CO.
41 Leonard St., New York, N. Y.
Turn the crank, machine does the work.

TEA AND ITS EFFECTS.—BY JAMES Wood, M.D. An interesting paper discussing the relative position of theine among other stimulants and the physiological actions that it is capable of exerting. Analysis of the tea leaf. Analysis of symptoms in theinism. Effects of tea on the nervous system. Comparative actions of theine and caffeine. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1011**. Price 10 cents. To be had at this office and from all newsdealers.

STEREOPTICONS, MAGIC LANTERNS AND ACCESSORIES, SEND FOR CATALOGUE TO CHAS BESELER MAKER 218 CENTRE ST. NEW YORK.

THE SIMPLON TUNNEL.—DESCRIPTION of the project for a tunnel through the Pennine Alps under Monte Leone, which, when completed, will be the longest in the world. Nature of the rock to be traversed, proposed system of construction, ventilation and cooling, hygienic arrangements, outside erections. Full details, with 11 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **998, 999,** and **1000**. Price 10 cents each. To be had at this office and from all newsdealers.

Drum in position.

DEAFNESS
and HEAD NOISES relieved by using
Wilson's Common Sense Ear Drums.
New scientific invention, entirely different in construction from all other devices. Assist the deaf when all other devices fail, and where medical skill has given no relief. Safe, comfortable, and invisible; no wire or string attachment. Write for pamphlet.
WILSON EAR DRUM MANUFG. CO.,
Louisville Trust Co. Building, Louisville, Ky.,
☞ *Mention this paper.* and 1122 Broadway, New York

WHAT PNEUMATIC TIRES ARE TO BICYCLES
"AIR CUSHIONS" ARE TO RUBBER STAMPS
PERFECT IMPRESSION ON ANY SURFACE
STRONG. ATTRACTIVE. PRACTICAL. INEXPENSIVE.
AIR CUSHION
THE H SMITH MFG. CO., SPRINGFIELD, MASS.

PIANOS! ORGANS! FREE!!

Test trial for 30 days in your own home. **NO MONEY REQUIRED.**
PIANOS-ORGANS FROM $25.00 UP,
Including a Complete Musical Outfit. **CASH or EASY PAYMENTS.**
NEW SOUVENIR CATALOGUE A work of art illustrated in 10 colors. **Worth its Weight in Gold.** We pay charges on it and send it **FREE**, all you **have to do is to ask for it to-day please.** Remember this is the old established house of CORNISH & CO., the only firm in the world selling **exclusively** from Factory to Family direct. A single instrument at wholesale price. We save you from $25.00 to $250.00. Write at once, **CORNISH & CO.**, Estab. 30 yrs., **Washington, N.J.**

MESSRS. MUNN & CO., Solicitors of Patents, have had nearly fifty years' continuous experience. Any one may quickly ascertain, free, whether an invention probably is patentable by writing to Munn & Co. Communications strictly confidential. A handbook of patents and how to obtain them sent **free.**

PATENTS

taken through Munn & Co. receive special notice in the *Scientific American.* This splendid weekly paper, elegantly illustrated, has the largest circulation of any scientific work. $3 a year. Specimen copies free.
Address MUNN & CO.,
New York, 361 Broadway.

Durable—Easily Applied.
This roofing is manufactured from natural Trinidad asphalt materials, and will not dry up and become brittle under exposure to the weather as coal-tar roofings do. ☞ *Send for free sample of roof 12 years old, with circular and price list to*
WARREN CHEMICAL & MFG. CO.,
85 Fulton Street,
New York, U. S. A.

For Sale.
The whole or part of valuable patent on an Awning constructed on principle of Venetian Blinds. Adapted to be folded up over door or window and used for ventilating, shelter from sun's rays or rainy weather. For particulars, address **C. LECLERCQ,** care Munn & Co., 361 Broadway, New York.

SMALL MOTORS for All Purposes.

The best manufactured. Specially adapted for all kinds of light work, sewing machine outfits, toys, dental drills, jewelers' lathes, models, etc. Send for Catalogue. **The LEAVITT MOTOR CO.,** Manufacturers of Electric Motors and Electrical Specialties, **122 Mitchell St., PROVIDENCE, R. I.**

Gearhart's Family Knitter.

Price $8.

Knits a stocking heel and toe in ten minutes. Knits everything required in the household from homespun or factory, wool or cotton yarns. Most practical knitter on the market. A child can operate it. **Strong, Durable, Simple, Rapid.** Satisfaction guaranteed.
☞ *Agents Wanted.* For particulars and sample work, address
J. E. GEARHART,
4 Stone Street, Clearfield, Pa.



THE "ROUND BOX" TYPEWRITER RIBBONS
M. & M. CARBON PAPERS.
Give perfect satisfaction when others fail. Used by nearly all United States Government Departments.
Samples Free upon application.
MITTAG & VOLGER,
Manufacturers for the Trade,
Cor. Park & B.R. Aves., Park Ridge, N. J.


If you want any
Rope
For Transmission of Power
WRITE TO US.
We have furnished Rope for some of the largest Drives in the country.
H. CHANNON COMPANY.
24-26 Market St. CHICAGO.

ESTABLISHED 1850.
THE DEFIANCE MACHINE WORKS



Rounding & Cornering Machine

No. 401 PERRY ST. DEFIANCE, OHIO, U.S.A.
MANUFACTURERS OF SPECIAL WOOD WORKING MACHINERY FOR HUB, SPOKE, WHEEL, BENDING, WAGON, CARRIAGE, SHAFT, POLE, NECK-YOKE, SINGLETREE, HANDLE & BARREL-HOOP FACTORIES.
LARGEST LINE IN THE WORLD
SATISFACTION GUARANTEED.

STORAGE BATTERIES for All Purposes.
Best Battery for Gas or Gasoline Engines. Thousands in use. Solid rolled lead plate. Immense strength. Large surface. Electro-chemical formation of active material. Greatest durability and efficiency. All sizes. . . . . Established 1889.
American Battery Co. 42 West Quincy Street CHICAGO, ILL.
Highest Award, World's Columbian Exposition, Chicago.

REAGAN FEED WATER HEATING, WATER CIRCULATING AND SHAKING GRATES, For STATIONARY, MARINE, and LOCOMOTIVE BOILERS.
AGENTS WANTED in all parts of the United States to manufacture our Grates on royalty. ☞ *Send for Catalogue.*
WATER CIRCULATING GRATE CO., Mfrs. and Sole Props.,
General Office and Works, 1026-1028 Filbert St., Philadelphia, Pa.



PROPOSALS.

PROPOSALS FOR ERECTION OF MEMORIAL Hall, West Point, N. Y.—Office of Post Quartermaster, West Point, N. Y., December 14, 1895.—Sealed proposals in triplicate will be received at this office until noon, Monday, January 13, 1896, for the construction of a Memorial Hall. Plans can be seen and forms and specifications obtained at this office or at the office of Messrs. McKim, Mead and White, Architects, 160 Fifth Avenue, New York City. The right is reserved to reject any and all proposals. J. B. BELLINGER, Captain and A. Q. M., U. S. Army.

Inventive Problems Solved Ideas developed and simplified. Best references. Secrecy guaranteed. W. F. LOUNSBURY, 5 Beekman St., Room 919, New York.

Shorthand by Mail Thoroughly taught by reporters. *Catalogue and first lesson Free.* Potts Shorthand College, Williamsport, Pa.

SCROLL SAWS Foot Power Machinery, Tools, Forges, Drills, etc. Send 4c for catalogue. **Wilkinson Co., 88 Randolph St., Chicago**

MAGIC LANTERNS WANTED AND FOR SALE OR EXCHANGE. HARBACH & CO. 809 Filbert St. Phila. Pa

ICE MACHINES, Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton Street, Milwaukee, Wis.

STEEL TYPEWRITING CYCLE
TYPE WHEELS, MODELS & EXPERIMENTAL WORK, SMALL MACHINERY NOVELTIES & ETC. NEW YORK STENCIL WORKS 100 NASSAU ST. N.Y.

BI-SULPHIDE OF CARBON for use in the arts, Killing Insects in Grain, Killing Burrowing Animals, etc. Manufactured by E. K. TAYLOR, Cleveland, Ohio

TURBINE WATER WHEELS.
SEND FOR PAMPHLET.
JAMES LEFFEL & CO.,
Springfield, Ohio, U. S. A.

DEAFNESS & HEAD NOISES CURED by my Invisible Tubular Ear Cushions. Whispers heard. Warranted to help more cases than all similar devices combined. Help ears as glasses do eyes. Sold by F. Hiscox only, 853 Br'dway, N. Y. Send for book of proofs **FREE**

CARBORUNDUM
HARDEST ABRASIVE KNOWN. EMERY AND DIAMOND POWDER SUBSTITUTE. IN FLOUR, POWDER-CRYSTAL-WHEEL-SLAB & HONE FORM.
CARBORUNDUM CO. MONONGAHELA CITY, PA. U.S.A.

PUZZLE PENKNIFE, 10c.

Best steel Blade concealed in nickel handle. Press the button and it opens. Worth 25c. as a knife and $5.00 as a puzzle. A sample of our 1000 Bargains, mailed postpaid with Cat. for 10c.
ROBT. H. INGERSOLL & BRO., 65 CORTLANDT ST, N. Y. CITY.

LADIES save your time, life and home by using the best fire kindler, that is always safe, ready and reliable. You can light your fire without paper or kindling wood with our kindler, and it will never burn out. Sent prepaid for **25 cents.** Agents wanted.
CLOSTER MANUFACTURING COMPANY,
Box 52, Closter, N. J.

SEND for Catalogue of the Musical Instrument you think of buying. **Violins repaired** by the Cremona System. C. STORY, 26 Central St., Boston, Mass.

VOLNEY W. MASON & CO.
FRICTION PULLEYS, CLUTCHES, and ELEVATORS
PROVIDENCE, R. I.

MODELS & GEARS EXPERIMENTAL WORK CATALOGUES FREE UNION MODEL WORKS CHICAGO

MONITOR



INCUBATOR.
A Catalogue of 64 pages. Gives full information of cost of raising poultry and at the least expense. The book is worth dollars to you. Address A. F. Williams, 61 Race St., Bristol, Conn.

OUR WELL DRILLS
awarded Highest Medal at the World's Fair.
All latest improvements. Catalogue free.
F. C. AUSTIN MFG. CO., CHICAGO, ILL.

The Electric Candle

for Magic Lanterns. Absolutely the newest and least expensive device for scientific or popular projection by electricity. ☞ *Send for special circular.*
QUEEN & CO. (Incorporated),
1010 Chestnut St., Philadelphia, U. S. A.

MANUFACTURE OF STARCH FROM Maize.—By J. Kriegner. Full details of the process. With one illustration. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1012**. Price 10 cents. To be had at this office and from all newsdealers.

ZENTMAYER'S MICROSCOPES

Used and indorsed by the leading Professors and Colleges throughout the world.
Perfection in the Art of Microscope making.
☞ Complete illustrated catalogue of microscopes and optical apparatus sent Free.
J. ZENTMAYER, 211 So. 11th St., Phila., Pa.

The Scientific American

PUBLICATIONS FOR 1896.

The prices of the different publications in the United States, Canada, and Mexico are as follows:

RATES BY MAIL.

The Scientific American (weekly), one year	$3.00
The Scientific American Supplement (weekly), one year	5.00
The Scientific American, Export Edition in which is incorporated the Spanish Edition (monthly), one year	3.00
The Scientific American Architects and Builders Edition (monthly), one year	2.50

COMBINED RATES.

The Scientific American and Supplement	$7.00
The Scientific American and Architects and Builders Edition	5.00
The Scientific American, Supplement, and Architects and Builders Edition	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of
MUNN & CO., 361 Broadway, New York.

© 1895 SCIENTIFIC AMERICAN, INC.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion. - 75 cents a line
Back Page, each insertion. - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, a the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

YOU can't tell a balky horse by his looks and you're just as likely to be deceived in a bicycle. There's no better guide when buying a wheel than this famous name—

Monarch

It identifies the king of wheels—it's a guarantee of strength, speed and reliability. A name that you can proudly point out to your friends.

4 models, $85 and $100, fully guaranteed. For children and adults who want a lower price wheel the **Defiance** is made in 8 models, $40, $50, $60, $75. Send for Monarch book.

Monarch Cycle Mfg. Co.,
Lake, Halsted and Fulton Sts., CHICAGO.

BRANCHES:
New York, San Francisco, Portland, Salt Lake City, Denver, Detroit, Toronto.

Any Boy

that will take the trouble to send for a

"Rugby" Watch

CATALOGUE, No. 61, will know more about what we have made for them in

WATCHES

than they would learn by reading a page of advertisements.

Our entire new line of Boys' Watches is elegant in designing and suits every taste.

The "Rugby" Catalogue will tell the story.

The Waterbury Watch Co.
WATERBURY, CONN.

AGENTS WANTED WRITE FOR CATALOGUE AND AGENCY. FOR **FINE TOOLS** IN EVERY SHOP. **C.H.BESLY & CO.** CHICAGO, ILL. U.S.A.

THE TIN PLATE INDUSTRY IN THE United States.—An interesting paper, showing the extraordinary development of the tin plate industry in this country, and the serious competition into which it is now entering with the British industry. With 18 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **1019, 1020, 1021, 1022** and **1023**. Price 10 cents each, or 50 cents for the series. To be had at this office and from all newsdealers.

PERFORATED METAL OF EVERY DESCRIPTION FOR ALL USES

THE HARRINGTON & KING PERFORATING CO.

CHICAGO, ILL. U.S.A. AND 284 PEARL ST. NEW YORK

The American Bell Telephone Company,

125 Milk Street,
Boston, Mass.

This Company owns Letters-Patent No. 463,569, granted to Emile Berliner November 17, 1891, for a combined Telegraph and Telephone, covering all forms of Microphone Transmitters or contact Telephones.

DAIMLER MOTOR COMPANY,

BUILDERS OF

Highest Grade Single and Twin Screw Launches.

Safest, cleanest and speediest power boat built. No smoke, or smokestack, no boiler, no electricity. No steam or naphtha under pressure. Run on one pint of gasoline per horse power per hour, and are under way in less than one minute. No licensed engineer or pilot.

Also Stationary Motors.

☞ **Send for Illustrated Catalogue and Price List.**

OFFICE AND WORKS, "STEINWAY," LONG ISLAND CITY, N. Y.

THE BICYCLE: ITS INFLUENCE IN Health and Disease.—By G. M. Hammond, M.D. A valuable and interesting paper in which the subject is exhaustively treated from the following standpoints: 1. The use of the cycle by persons in health. 2. The use of the cycle by persons diseased. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1002**. Price 10 cents. To be had at this office and from all newsdealers.

HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO. HARTFORD, CONN.

DOES ANY-THING PHOTOGRAPHIC— The Pocket Kodak.

Pocket Kodak, loaded for 12 pictures, 1½ x 2, - $5.00
Developing and Printing Outfit, - - - 1.50

EASTMAN KODAK CO.
Sample photo and booklet for two 2-cent stamps. **ROCHESTER, N. Y.**

SKATE SHARPENER . . .

POSTPAID, 30 CENTS.

The only sharpener making a Concave or Square surface. Works like a plane. Weighs only four ounces. Easily operated and will last a lifetime.

☞ Write for Catalogue of Skates and 5,000 interesting Tricks and Novelties.

PECK & SNYDER, 130 Nassau Street, NEW YORK CITY.

THE FADING OF PIGMENTS.—A PAPER by Capt. W. DeW. Abney, discussing the action of the various rays of the spectrum upon colors. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1016**. Price 10 cents. To be had at this office and from all newsdealers.

EDGE TOOLS

are often nearly ruined by using a grindstone not adapted to the work. Our quarries produce a large variety of grits suitable for grinding any tool.

☞ *May we send you our Catalogue, which will give you some information?*

GRAFTON STONE COMPANY,
No. 80 River Street, GRAFTON, OHIO.

"IMPROVEMENT THE ORDER OF THE AGE."



Three New Model Smith Premier Typewriters

NOS. 2, 3 AND 4

HAVE YOU EXAMINED THEM?

Many Improvements Heretofore Overlooked by Other Manufacturers.

Address THE SMITH PREMIER TYPEWRITER COMPANY, Syracuse, N. Y., U. S. A.

BRANCH OFFICES IN TWENTY-NINE PRINCIPAL CITIES IN THE UNITED STATES.

. . . WE ARE BUILDING . . .

The Celebrated

"HORNSBY-AKROYD" OIL ENGINE

The De La Vergne Refrigerating Machine Co.
FOOT E. 138TH STREET, NEW YORK.



"OTTO"

GAS AND GASOLINE ENGINES.

⅓ to 100 h. p. Can be used in cities or in country independent of gas works or gas machines.

OVER 45,000 SOLD.

No Boiler, No Danger, No Engineer.

The Otto Gas Engine Wks., Incorp'd, Philadelphia

Bristol's Patent Steel Belt Lacing.

The simplest, cheapest and most perfect Belt Fastening for all kinds of belting. *Samples sent free.*

The Bristol Co.
Waterbury, Conn.

HALF A CENTURY OF CYCLES.—AN interesting history of the cycle from its origin up to the present time. The first crank-driven bicycle. The "bone-shaker" and its successors. The tricycle. The modern wheel. Cycle building a science. Points of improvement. The pneumatic tire. A hand and foot cycle. With 9 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1012**. Price 10 cents. To be had at this office and from all newsdealers.

PRIESTMAN SAFETY OIL ENGINE

"Phenomenally low in cost of operation."—Franklin Inst.

NEITHER STEAM NOR ENGINEER

Kerosene, NOT Gasoline

Economical, Simple, Safe, Automatic. For Electric Lighting, Pumping, Milling, etc.

PRIESTMAN & COMPANY, Inc.
Front and Tasker Streets, - - Philadelphia

BOSTON ELECTRIC RAILWAY SUBway.—Description of a new subway system under certain streets of Boston, by means of which the electric cars will be diverted from the surface of the streets on some of the heaviest lines of travel. With 8 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1017**. Price 10 cents. To be had at this office and from all newsdealers.

GASOLINE ENGINES.

1½ to 75 horse power. For Propelling Boats of all kinds. Cheapest Fuel, Absolute Safety, No Licensed Engineer, Simple Construction, Hundreds in Successful Use.

☞ *Write for illustrated catalogue.*

GLOBE GAS ENGINE CO.,
Merion Avenue & 49th Street. PHILADELPHIA, PA.

There is hardly a USE OF POWER



in Factory, Mill, Store, Office, Elevator, Creamery, or Shop—or on the Farm, the

"CHARTER"

is not now filling. It is also running Boats, Well Drills, Pumps, Dynamos, Threshing Machines, etc. Of course it also uses Gasoline.

CHARTER GAS ENGINE CO., P. O. Box 148, Sterling, Ill.

Waverley BICYCLES.

Do You Play Cards?



Above ¼ actual size.

Ridden by the Elite
Of both continents.

Elegant in Design,
Superb in Finish.

Send two-cent stamp and we will mail FREE
Our SOUVENIR GAME COUNTER

THE ACME OF PERFECTION IN CYCLE CONSTRUCTION.

Art catalogue describing ladies' and gentlemen's models free by mail.

INDIANA BICYCLE CO., INDIANAPOLIS, IND.

ENGINES, Boilers and Machine Tools. New and Second-hand. *Send stamp for paper "Machinery & Supplies."* W. P. Davis, Rochester, N. Y.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM JESSOP & SONS LTD 91 JOHN ST. NEW YORK

At ¼ Price Bicycles, Watches Guns, Buggies Harness, Sewing Machines Organs. Pianos Safes, Tools Scales of all varieties and 1000 other articles. Lists free. CHICAGO SCALE CO., Chicago, Ill.

ALCO VAPOR LAUNCH.

Engine and helm controlled from bow. Latest improved and only 12 to 1 motor now ready for the market. 18 to 40 ft. launches 2, 3, 5 and 7 h. p. No licensed engineer or pilot required. *Speed and safety guaranteed. No dangerous naphtha or gasoline used.*

Marine Vapor Engine Co., Jersey City, N. J.

-- THE --

SCIENTIFIC AMERICAN

☞ **ESTABLISHED 1845.**

The Most Popular Scientific Paper in the World

Only $3.00 a Year, Including Postage.

Weekly--52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of Patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year* - 52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of **Three Dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Postmasters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO., 361 Broadway, New York.

Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography Archæology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology. Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography. Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT, for the United States, Canada, and Mexico, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year to one address for $7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check,

MUNN & CO., 361 Broadway, New York.

Building Edition.

THE SCIENTIFIC AMERICAN BUILDING EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates* and other fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with Floor Plans, Descriptions, Locations, Estimated Cost, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to

MUNN & CO., 361 Broadway, New York.

Export Edition

of the SCIENTIFIC AMERICAN, with which is incorporated "LA AMERICA CIENTIFICA E INDUSTRIAL," or Spanish edition of the SCIENTIFIC AMERICAN is published monthly, and is uniform in size and typography with the SCIENTIFIC AMERICAN. Every number contains about 50 pages, profusely illustrated. It is the finest scientific, industrial export paper published. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. THE SCIENTIFIC AMERICAN EXPORT EDITION has a large guaranteed circulation in all commercial places *throughout the world*. $3.00 a year, postpaid, to any part of the world. Single copies, 25 cents.

☞ Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost. Rates upon application.

MUNN & CO., Publishers,
361 Broadway, New York.

PRINTING INKS.

The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

© 1895 SCIENTIFIC AMERICAN, INC.